

SAW Filters for Mobile Communications

Series/Type: B7848

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product		Deadline Last Orders	Last Shipments
B39861B7848C710		2010-01-15	2010-04-30	2010-07-30

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at www.epcos.com/sales.



SAW Components

B7848

Low-Loss Filter for Mobile Communication

860,5 MHz

Data Sheet

Characteristics

Operating temperature range: T = -30 to +70 °C

Terminating source impedance: $Z_{\rm S} = 50~\Omega$ Terminating load impedance: $Z_{\rm L} = 50~\Omega$

	min.	typ.	max.	
Nominal frequency f	<u> </u>	860,5	_	MHz
Maximum insertion attenuation o 851,0 870,0 MHz	u _{max} —	2,2	3,0	dB
Amplitude ripple (p-p)		0,6	1,0	dB
Group delay ripple (p-p) Δ 851,0 870,0 MHz	Δτ <u> </u>	30	60	ns
Return loss (Input and Output) 851,0 870,0 MHz	11	13	_	dB
Attenuation 0,100 806,000 MHz 806,000 825,000 MHz 896,000 902,000 MHz 905,825 924,825 MHz 960,650 979,650 MHz 1070,3001089,300MHz 1089,300 3000,000MHz	45 37 28 27 37 47 27	55 51 42 51 57 55 39	_ _ _ _ _ _	dB dB dB dB dB dB




SAW Components B7848


Low-Loss Filter for Mobile Communication 860,5 MHz

Data Sheet

Transfer function

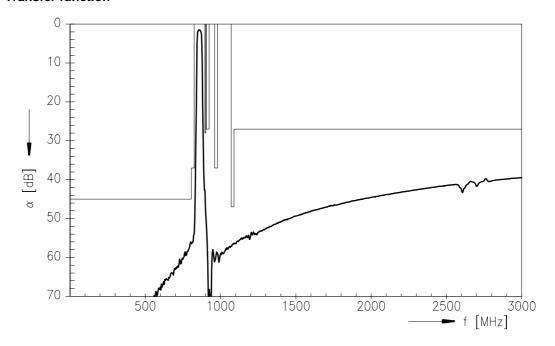

Transfer function (pass band)

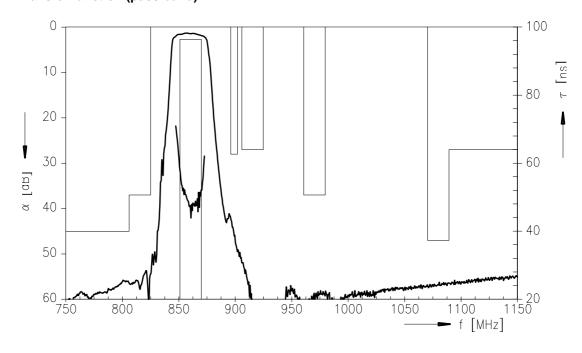



SAW Components B7848

Low-Loss Filter for Mobile Communication

860,5 MHz

Data Sheet

Published by EPCOS AG Surface Acoustic Wave Components Division, SAW MC WT/IS P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2004. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.