
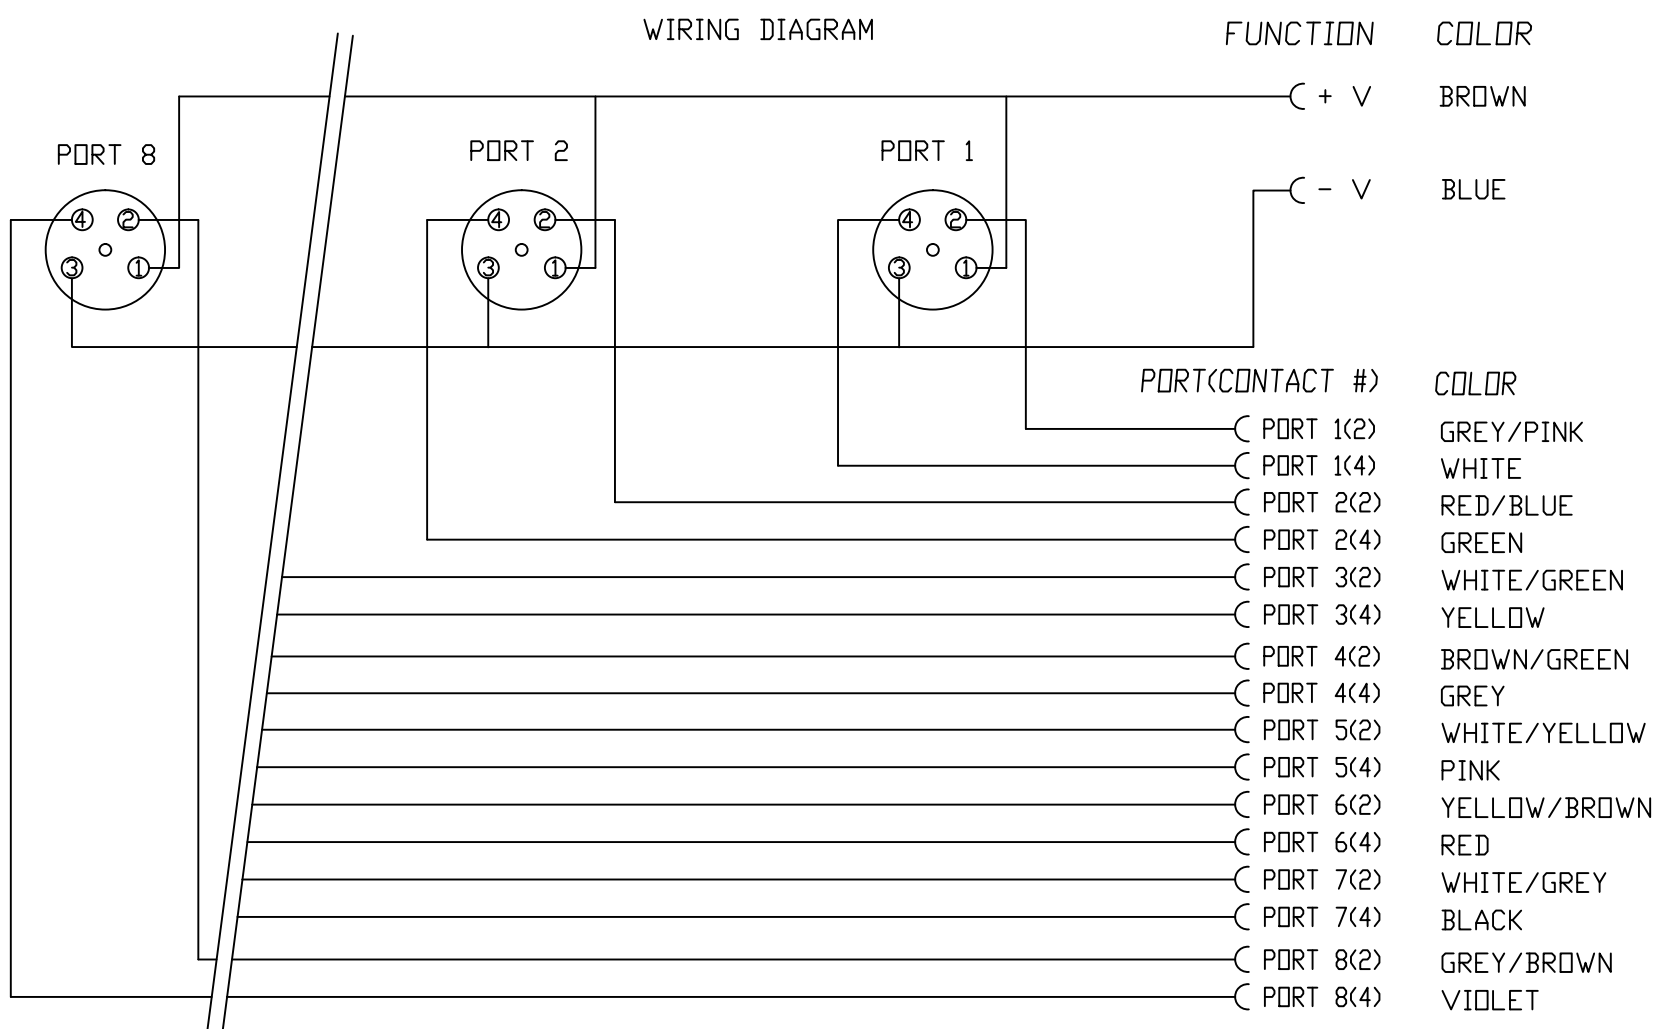


13	12	11	10	9	8	7	6	5	4	3	2	1
MATERIAL NUMBER	OLD PART NUMBER	FINISHED LENGTH										
1200540004	BNY803P-FBP-05	5M +165mm -0 [16.4' +6.5" -0]										

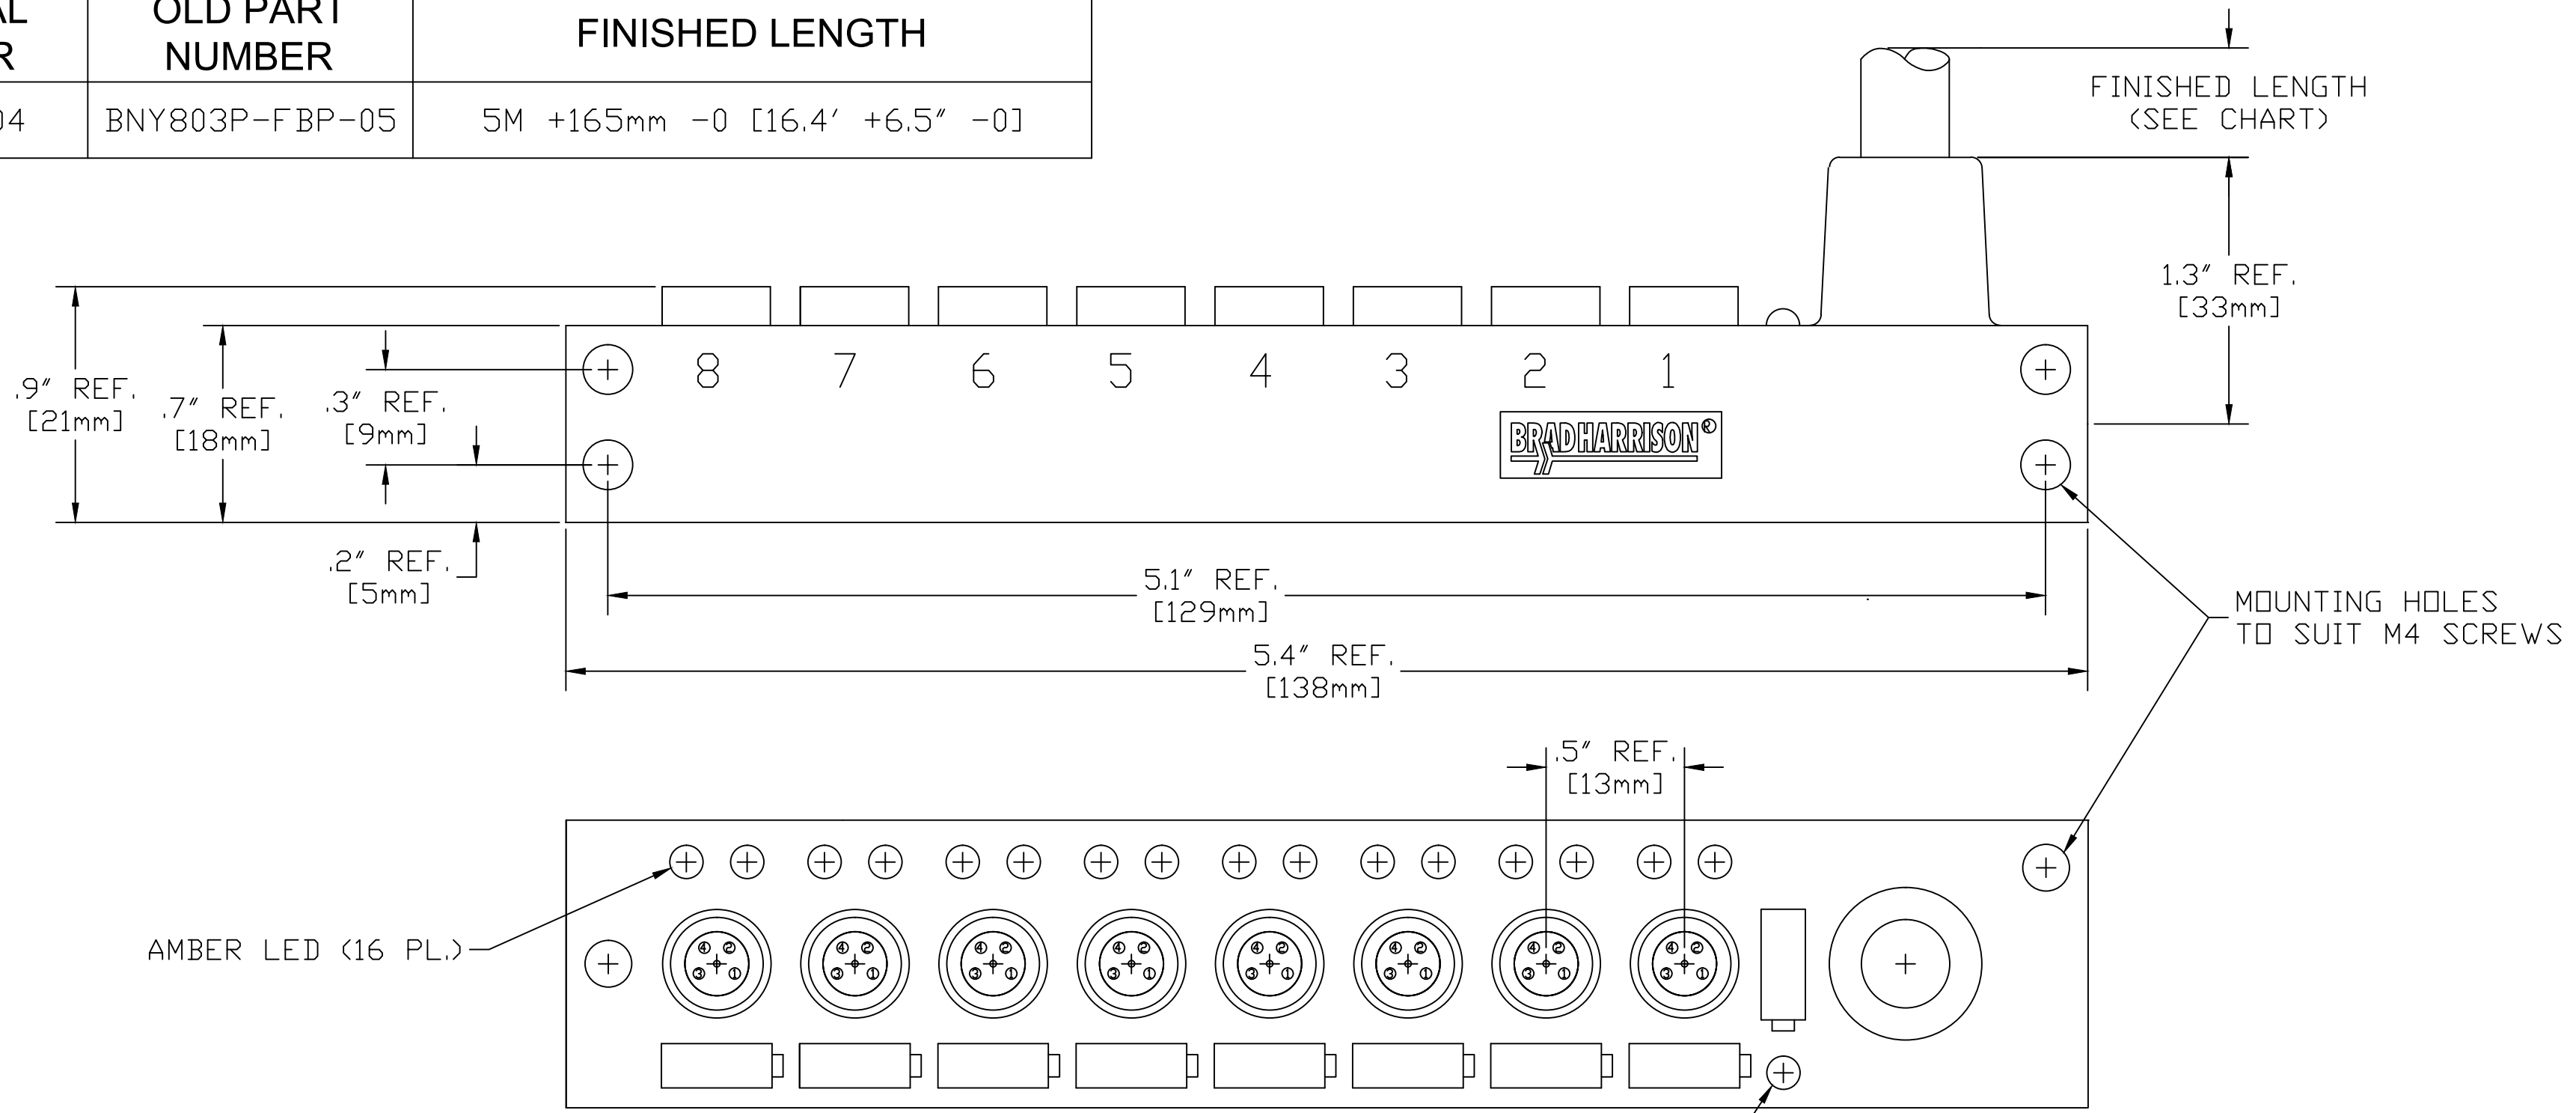

PORT (CONTACT #)	FUNCTION	COLOR
C PORT 1(2)	C + V	BROWN
C PORT 1(4)	C - V	BLUE
C PORT 2(2)		GREY/PINK
C PORT 2(4)		WHITE
C PORT 3(2)		RED/BLUE
C PORT 3(4)		GREEN
C PORT 4(2)		WHITE/GREEN
C PORT 4(4)		YELLOW
C PORT 5(2)		BROWN/GREEN
C PORT 5(4)		GREY
C PORT 6(2)		WHITE/YELLOW
C PORT 6(4)		PINK
C PORT 7(2)		YELLOW/BROWN
C PORT 7(4)		RED
C PORT 8(2)		WHITE/GREY
C PORT 8(4)		BLACK
C PORT 8(2)		GREY/BROWN
C PORT 8(4)		VIOLET

BNY803P-FBP-05

Wire type: 2x.75mm² + 16x.34mm² Black PUR
 cable length: 05----5 Meter, 100----10 Meter

CONTACT:	GOLD/NICKEL OVER COPPER ALLOY
□-RING:	FKM, RED
HOUSING:	PBT, YELLOW
VOLTAGE RATING:	10-30V DC MAX
AMPERAGE RATING:	MODULE-6A MAX PORT-2A MAX
PROTECTION:	IP67
OPERATING TEMPERATURE:	-5°C TO 80°C

INITIAL RELEASE EC NO: IPG2014-0871 DRWN: EBRACKEN 2013/07/10 CH'KD: BARDEN APPR: BWOODMAN2013/11/20	QUALITY SYMBOL ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ±--- ±--- 3 PLACES ±--- ±.005 2 PLACES ±0.13 ±.010 1 PLACE ±0.25 ±.020	DIMENSION STYLE IN/MM DRAWN BY DATE EBRACKEN 2013/06/18 CHECKED BY DATE BARDEN 2013/11/21 APPROVED BY DATE BWOODMAN 2013/11/20	SCALE NTS DESIGN UNITS INCH THIRD ANGLE PROJECTION	TITLE M8-MPIS 4 POLE-8 PORT TOP-5M SM CABLE BLACK PUR MOLEX INCORPORATED	MATERIAL NO. SEE CHART SIZE C	DOCUMENT NO. SD-120054-005 SHEET NO. 1 OF 1	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
	A		REV					
	A		REV					