
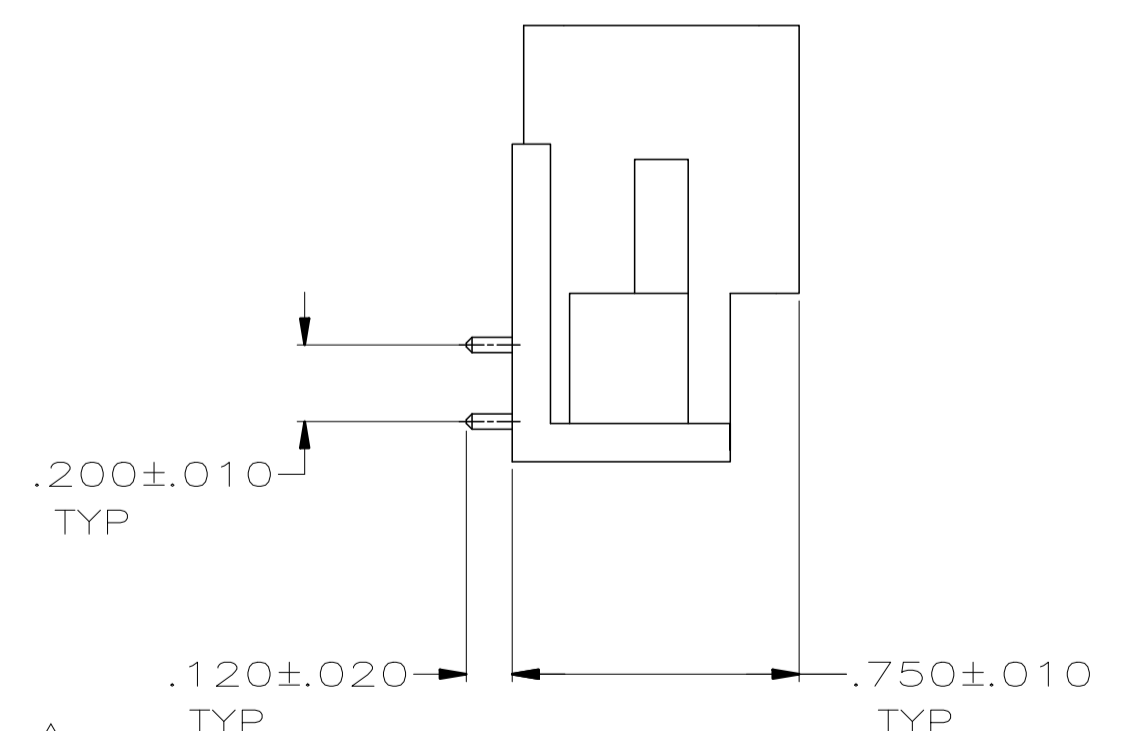
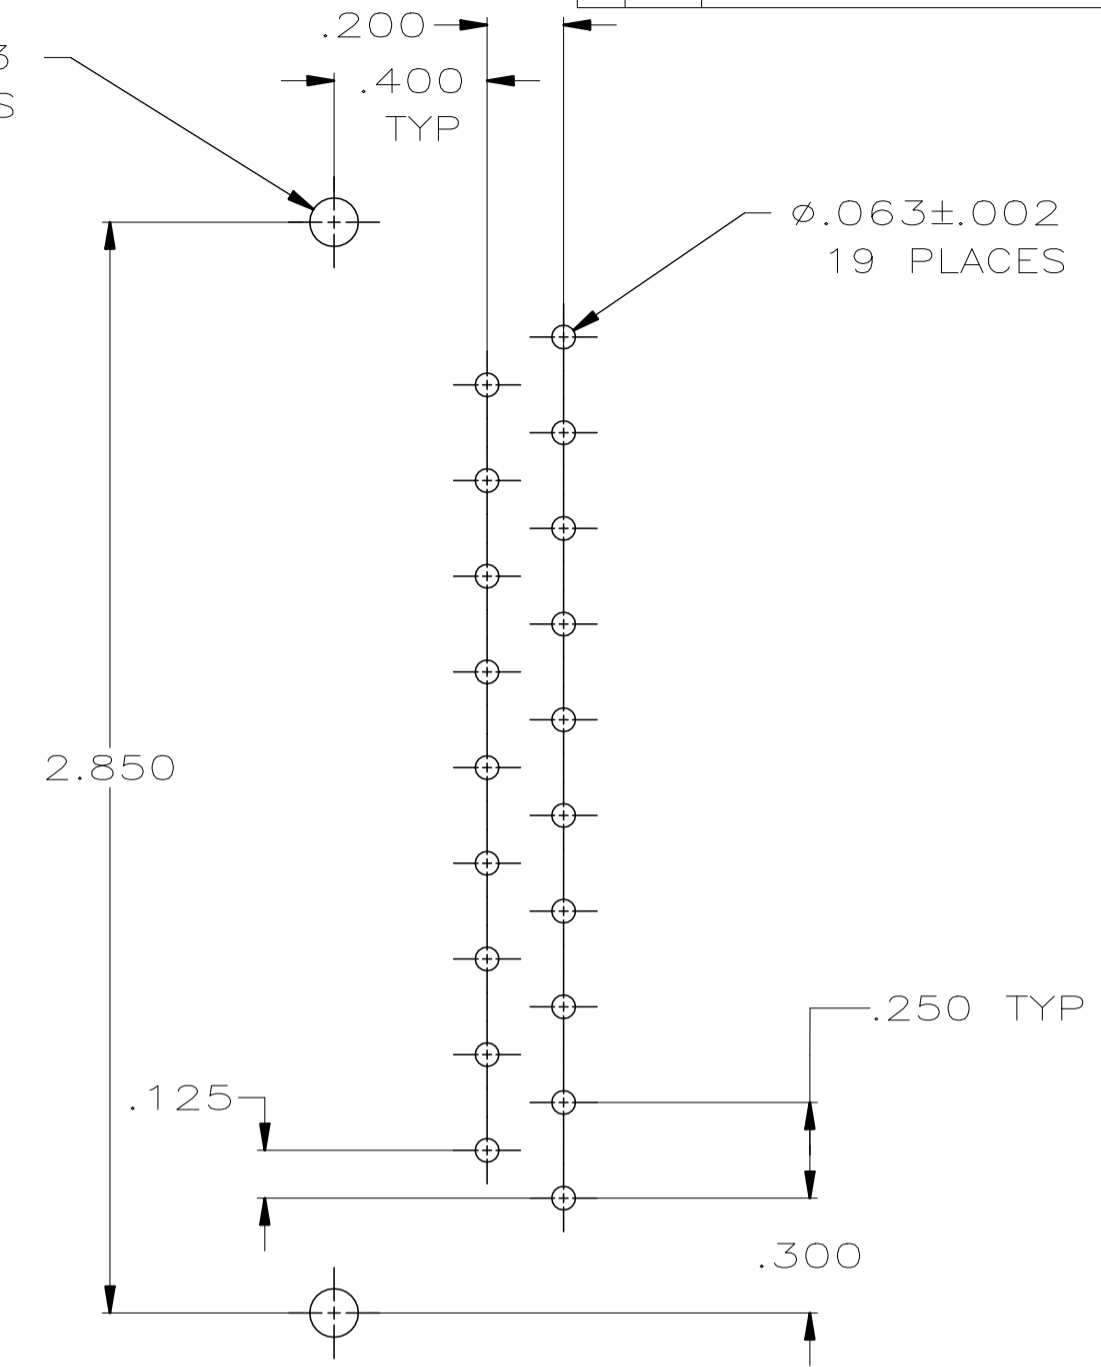
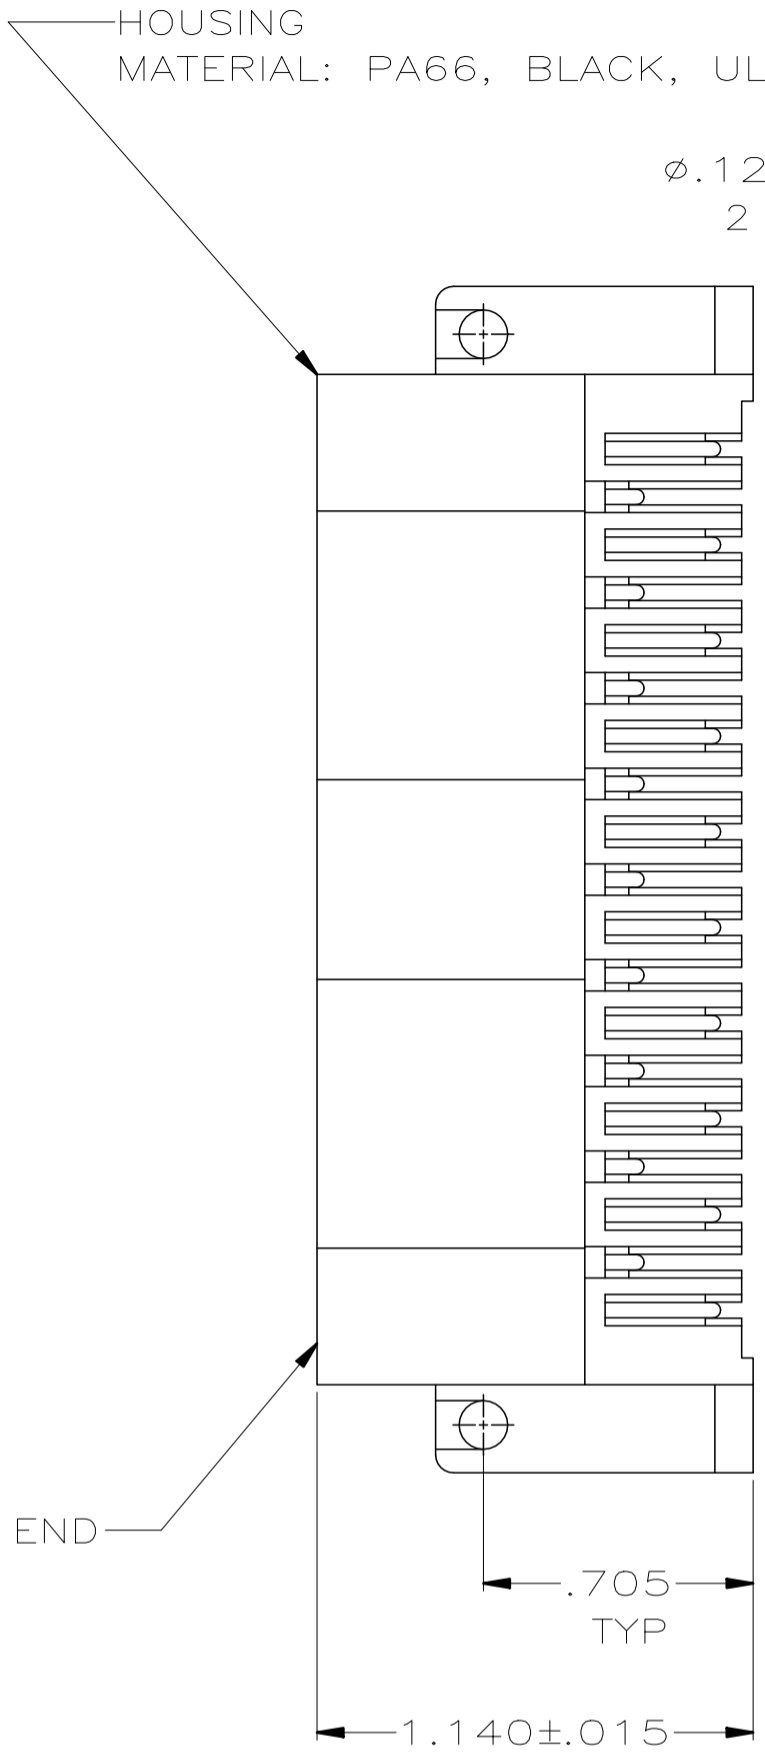


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - TE Connectivity ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
G		REVISED PER ECO-20-001083	30JAN2020	SM	MZ
E1		REVISED PER ECO-09-020689	25AUG09	KK	AEG
F		REVISED PER ECO-18-000439	18JAN2018	RS	MZ

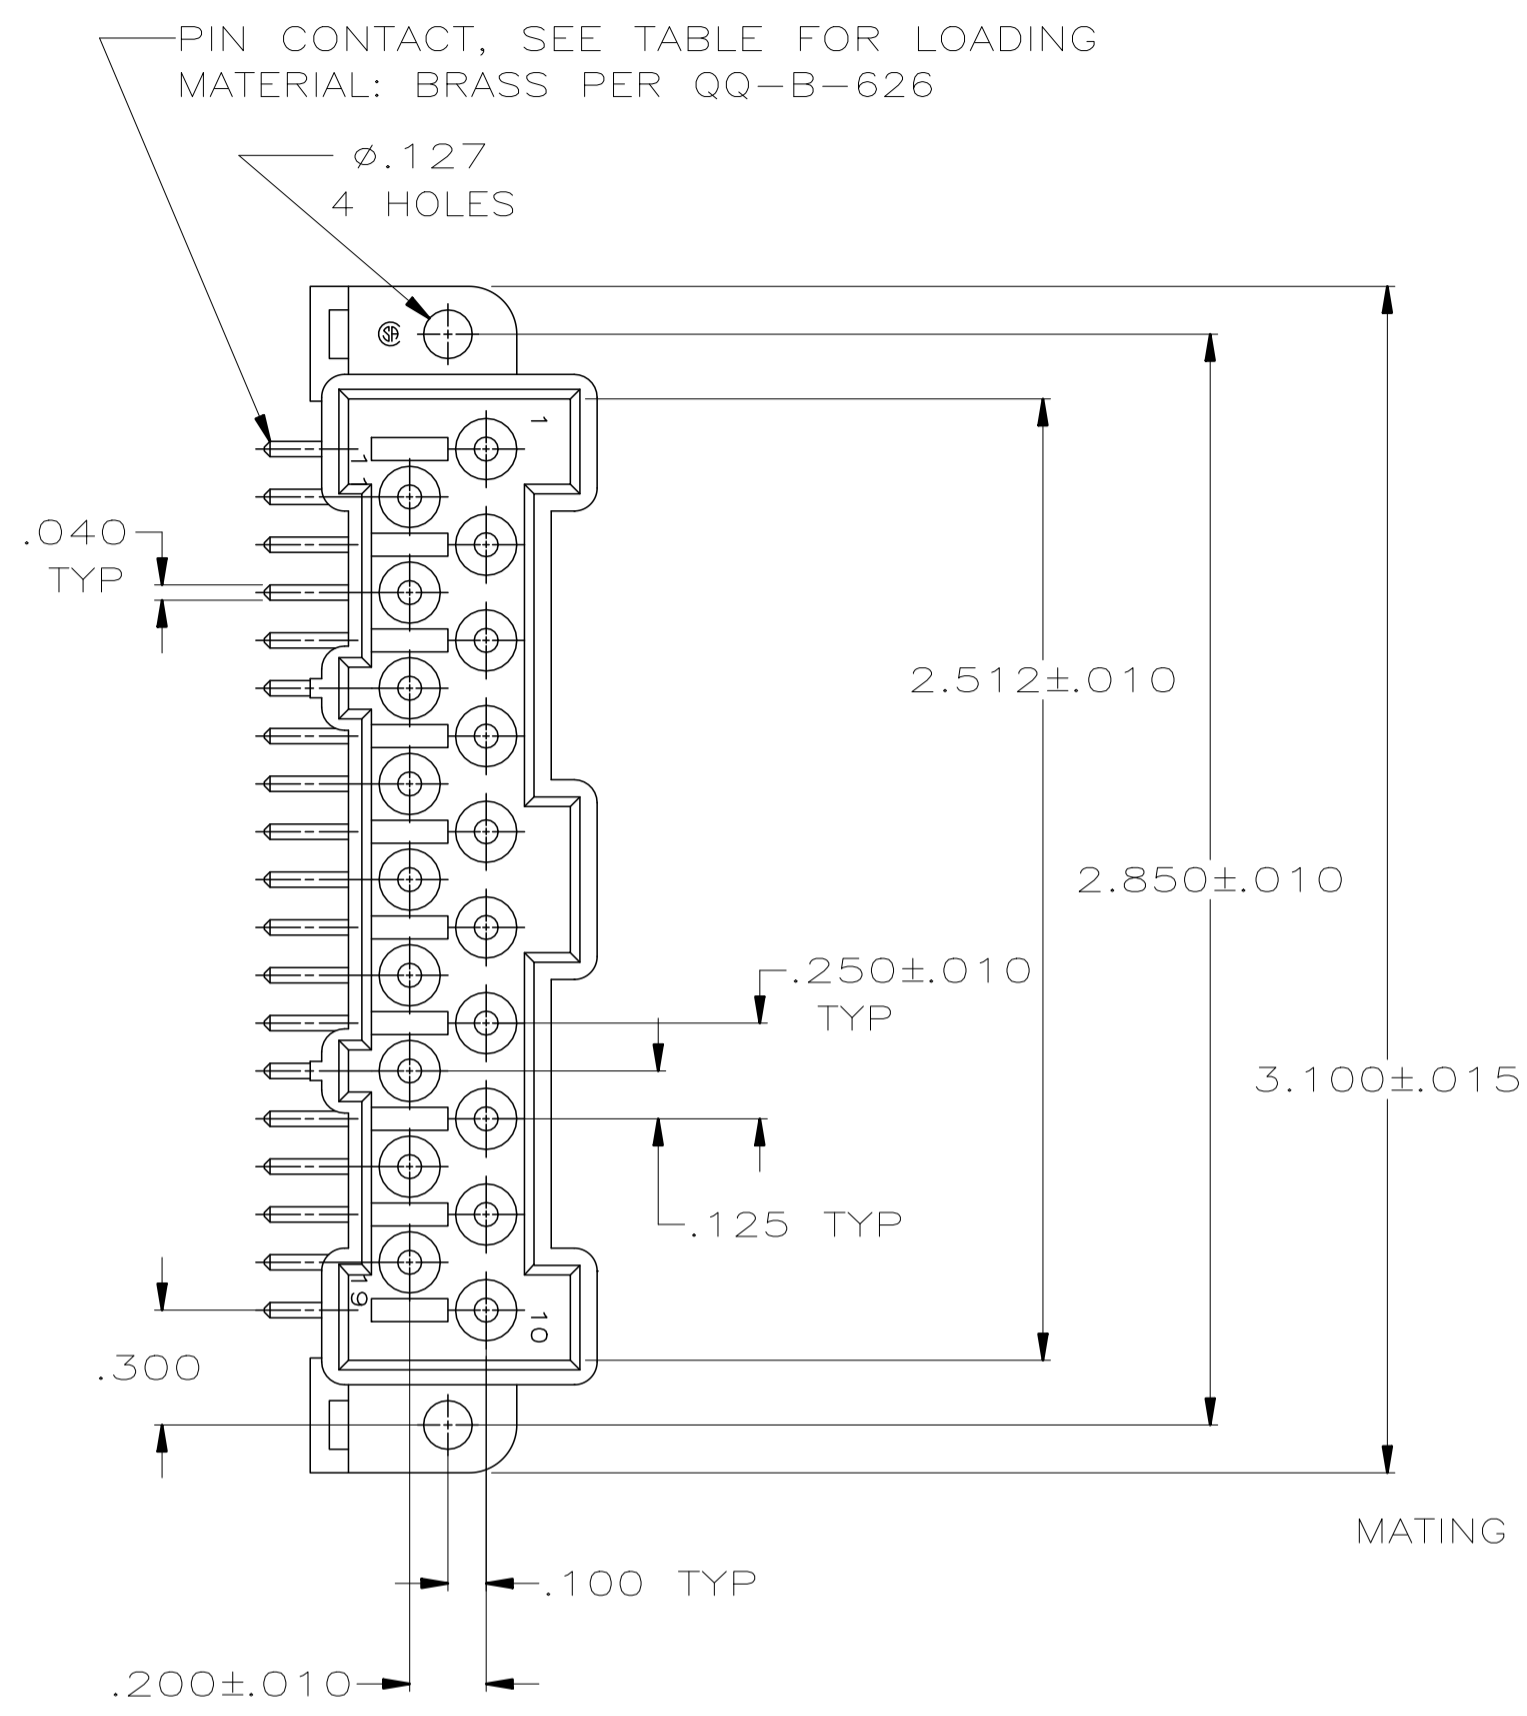

- ① PLATED WITH .000030 MINIMUM GOLD FOR LENGTH OF .200 MINIMUM FROM MATING END, .000150 MINIMUM TIN-LEAD ON REMAINDER, ALL OVER .000050 MINIMUM NICKEL ON ENTIRE CONTACT.
- ② PLATED WITH .000030 MINIMUM GOLD FOR LENGTH OF .200 MINIMUM FROM MATING END, .000150 MINIMUM TIN ON REMAINDER, ALL OVER .000050 MINIMUM NICKEL ON ENTIRE CONTACT.
- ③ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

③ OBSOLETE	②	ALL EXCEPT 10 & 19	212630-6
③ OBSOLETE	②	ALL EXCEPT 1 & 11	212630-5
	②	ALL	212630-4
OBSOLETE	①	ALL EXCEPT 10 & 19	212630-3
OBSOLETE	①	ALL EXCEPT 1 & 11	212630-2
OBSOLETE	①	ALL	212630-1
PIN CONTACT FINISH		LOADING	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN J LIPPERT 10-19-88	TE Connectivity
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± -	CHK J McCLINTON 10-19-88	
MATERIAL SEE CALLOUTS	FINISH SEE TABLE	APVD -	NAME
		PRODUCT SPEC -	PIN HEADER ASSEMBLY, 19 POS IN LINE, RIGHT ANGLE, METRIMATE
		APPLICATION SPEC -	SIZE CAGE CODE DRAWING NO RESTRICTED TO
		WEIGHT -	A2 00779 C-212630
		CUSTOMER DRAWING	SCALE 2:1 SHEET 1 of 1 REV G