EK-28585-C77

SHT I.I


NOTE

I. INCREASED PRESSURE AT THE SOUND INLET CAUSES A POSITIVE GOING VOLTAGE TO APPEAR AT THE OUTPUT TERMINAL, RELATIVE TO THE NEGATIVE TERMINAL.

2

C.O. #

LOCATED FROM TWO SURFACES FOR CUSTOMER CONVENIENCE. ONLY APPLICABLE FROM ONE SURFACE, NOT TO BE USED TOGETHER. HORIZONTAL LOCATION FOR TERMINAL CENTERED TO ± 0 ,17 [.007].

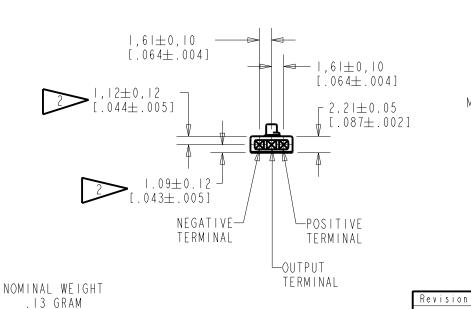

6

I.98±0.05 -

 $[.078 \pm .002]$

0.48[.019] MINIMUM STRAIGHT

0,64
[.0555±.0015]
OUTER DIAMETER

1.61±0.06
[.0635±.0025]
MAXIMUM
SOLDER BUILDUP

Implementation Date

DIMENSIONS IN MILLIMETERS [INCHES]

→ 2.77±0.05

 $[.109\pm.002]$

 $3,99\pm0,02$


 $[.157 \pm .001]$

В Active В MI0105324 2-12-14 Α MI0I00742 8-05-05 SCALE: DR. BY 2:1 AΒ 8-5-05 DO NOT SCALE DRAWING CK. BY DATE TITLE: MICROPHONE EK-28585-C77 MMM 8-8-05 APP. BY DATE SHT I.I OUTLINE DRAWING 8-8-05

KNOWLES ELECTRONICS ITASCA, ILLINOIS U.S.A.

REVISION

RELEASE LEVEL

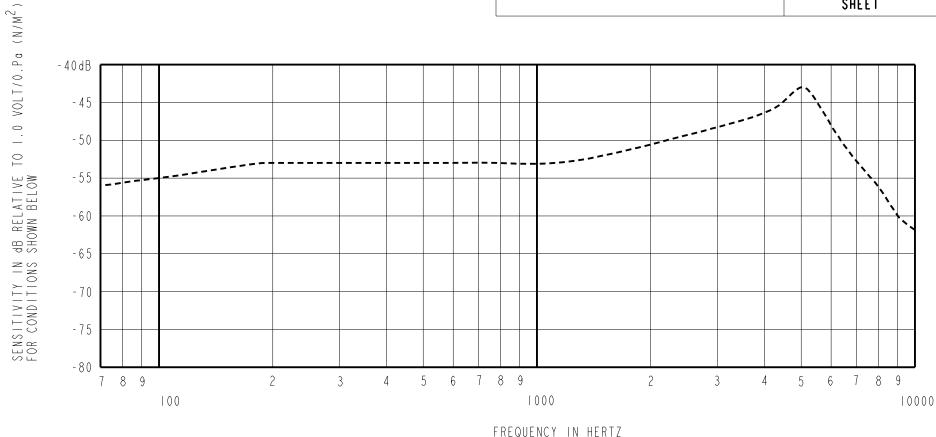

<u>SENSITIVITY</u>

$M \mid N$ NOM. MAX. - - -- 56.0 - - --55.0 - 57.0 -53.0 -51.0

-43.0

<u>DEVICE CONFORMITY</u>

RANGE	OF	DEVI	ATION	FROM	1000Hz
	-	2.0	+	. 0	
	-	2.5	-	. 0	
		0.0	(0.0	
	4	- A A	+ 1 6	; O	

NOTES:

FREQUENCY

50-90

100

500

5300

- I. CASE CONNECTED TO NEGATIVE TERMINAL.
- 2. MICROPHONE TO BE FUNCTIONAL WITH 10 VDC SUPPLY.
- 3. CONFORMS TO REQUIREMENTS SHOWN ON 'ELECTRET MICROPHONE ENVIRONMENTAL QUALIFICATIONS TEST, EK-PA SHEET 2.2' WITH REF. FREQ. OF 1000 Hz.
- 4. TYPICAL SENSITIVITY TO HUMIDITY AT 1000 Hz IS 0.02 dB/%RH.
- 5. SENSITIVITY AND NOISE VALUES INDICATED ON THIS SPECIFICATION ARE VALID AT 50% HUMIDITY.

	DC	DC AMPLIFIER CURRENT DRAIN	SENSITIVITY CHANGE ON REDUCING SUPPLY TO 0.9VDC	"A" WEIGHTED NOISE (I kHz EQUIV. SPL)	OUTPUT IMPEDANCE OHMS		CE OHMS
	SUPPLY				MIN.	NOM.	MAX.
	1.3V	50 μΑ MAX.	3 dB MAX.	26.0 dB MAX.	2800	4400	6800

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
В	MI0105324	2-12-14	Active	l K
А	MI0100742	8-05-05		

SHT

DATE 8-5-05

DATE

8-8-05

DATE

8-8-05

MMM

KNOWLES ELECTRONICS ITASCA, ILLINOIS U.S.A.

WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION PR. BY CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION CK. BY MICROPHONE EK-28585-C77 MMM APP. BY

PERFORMANCE SPECIFICATION