




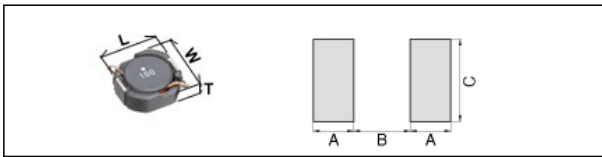


CLF7045T-151M-CA

| | |
|--------------|--|
| Applications |  Automotive Grade |
| Feature |  Wire Wound |
| |  Magnetic Shield |
| |  Ferrite Core |
| |  AEC-Q200 |
| Series | CLF-CA Series / CLF7045-CA Type |
| Status | Production |



| Size | |
|------------------------------|------------------|
| Length(L) | 7.20mm +/-0.20mm |
| Width(W) | 6.90mm +/-0.20mm |
| Thickness(T) | 4.50mm +/-0.30mm |
| Recommended Land Pattern (A) | 1.70mm Nom. |
| Recommended Land Pattern (B) | 4.40mm Nom. |
| Recommended Land Pattern (C) | 2.20mm Nom. |


| Electrical Characteristics | |
|---|------------------------|
| Inductance | 150uH +/-20% at 100kHz |
| Rated Current (L Change) [Typ.] | 670mA (10% Down) |
| Rated Current (Temperature Rise) [Typ.] | 610mA (30degC Rise) |
| DC Resistance [Nom.] | 480mΩ |
| DC Resistance [Max.] | 576mΩ |

| Other | |
|---|--------------------------------------|
| Operating Temp. Range (Including Self-Temp. Rise) | -40 to 105degC |
| Soldering Method | Reflow, Iron Soldering |
| AEC Q200 | Yes |
| Packing | Blister (Plastic)Taping [330mm Reel] |
| Package Quantity | 1000Pcs Min. |
| Weight | 0.8g |


•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.

CLF7045T-151M-CA


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

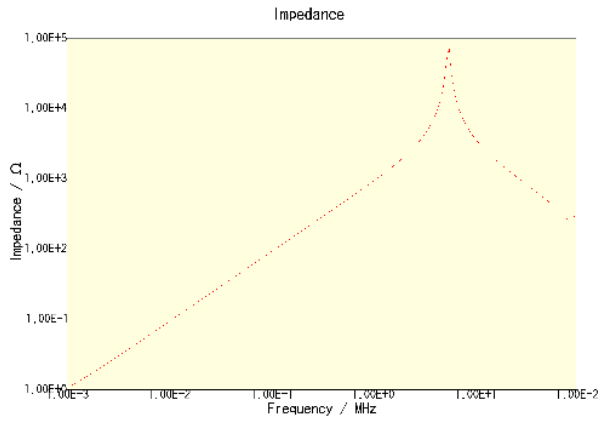


CLF7045T-151M-CA

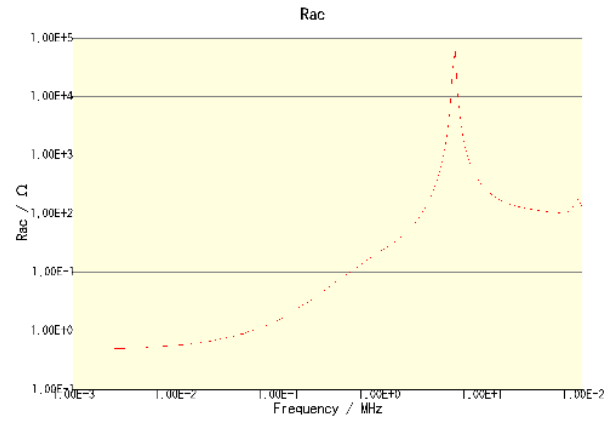

CLF7045T-151M-CA

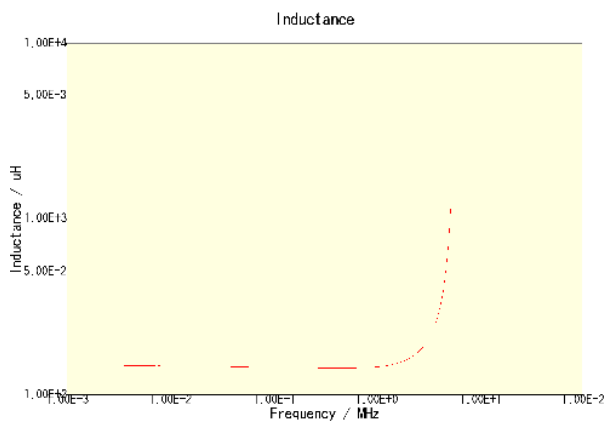

CLF7045T-151M-CA

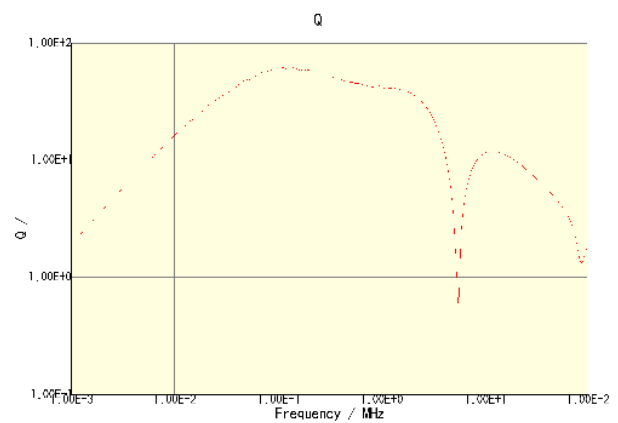


CLF7045T-151M-CA


•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.

CLF7045T-151M-CA

Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

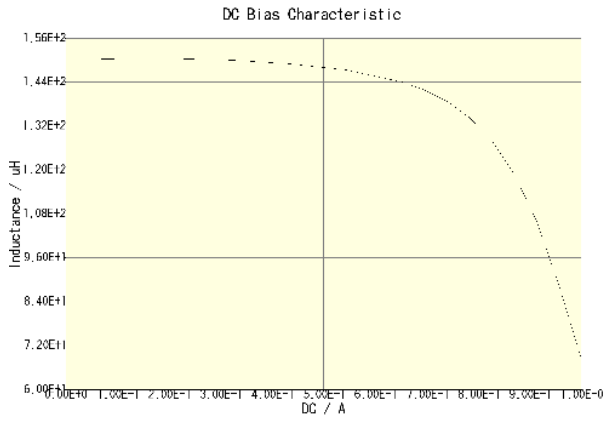


CLF7045T-151M-CA(Amb. Temp. = 20degc)

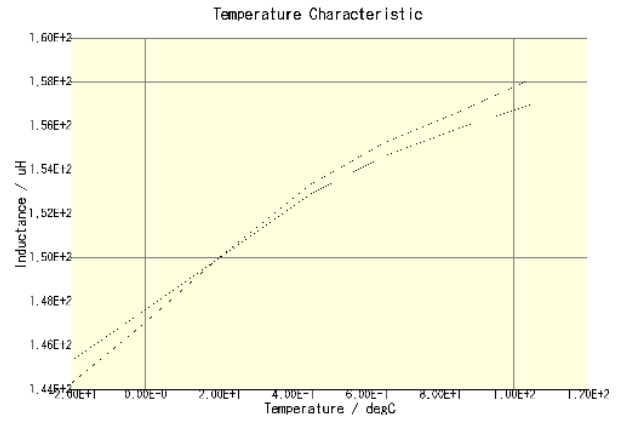

CLF7045T-151M-CA(DC = 0A)

CLF7045T-151M-CA(DC = 0.305A)

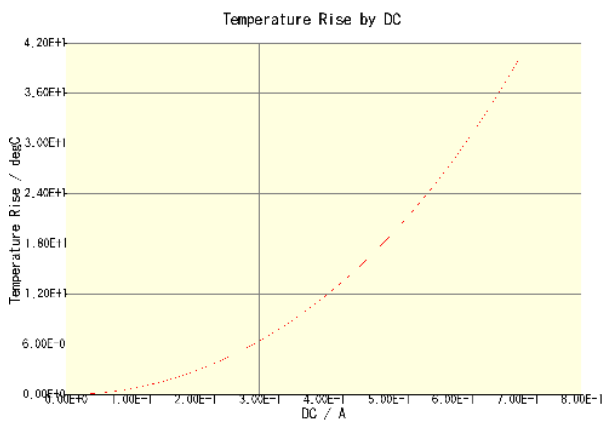

CLF7045T-151M-CA(Amb. Temp. = 20degc)

•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.