

Economy Power 2.5 TE Internal #: 1969590-3 Housing, Receptacle, Wire-to-Wire / Wire-to-Panel, 3 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, White, Mating Retention, Economy Power 2.5

### View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings



Connector Product Type: Housing Connector & Housing Type: Receptacle Connector System: Wire-to-Panel, Wire-to-Wire Number of Positions: 3 Centerline (Pitch): 2.5 mm [.098 in]

# Features



# Product Type Features

Connector Product Type	Housing	
Connector & Housing Type	Receptacle	
Connector System	Wire-to-Panel, Wire-to-Wire	
Sealable	No	
Connector & Contact Terminates To	Wire & Cable	
Configuration Features		
Number of Positions	3	
Number of Rows	1	
Electrical Characteristics		
Operating Voltage	250 VAC	
Body Features		
Primary Product Color	White	
Contact Features		

**C** For support call+1 800 522 6752

Housing, Receptacle, Wire-to-Wire / Wire-to-Panel, 3 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, White, Mating Retention, Economy Power 2.5



Contact Type	Pin
Contact Base Material	Brass
Contact Current Rating (Max)	7.5 A
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Strain Relief	Without
Panel Mount Feature	With
PCB Mount Retention	Without
Mating Retention Type	Latch
Mating Retention	With
Connector Mounting Type	Panel Mount
Housing Features	
Housing Entry Configuration	Both Ends Closed
Housing Material	Nylon - GF
Centerline (Pitch)	2.5 mm[.098 in]

### Dimensions

Connector Length	10 mm[.393 in]	
Connector Height	6.6 mm[.26 in]	
Connector Width	18.17 mm[.715 in]	
Compatible Insulation Diameter Range	1.3 – 1.7 mm[.051 – .067 in]	
Wire Size	.13 – .33 mm²	
Usage Conditions		
Operating Temperature Range	-25 – 105 °C[-13 – 221 °F]	
Operation/Application		
Circuit Application	Power & Signal	
Industry Standards		
Glow Wire Rating	Standard Part - Not Glow Wire	
UL Flammability Rating	UL 94V-0	
Packaging Features		
Packaging Quantity	1600	
Packaging Method	Bag	

Housing, Receptacle, Wire-to-Wire / Wire-to-Panel, 3 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, White, Mating Retention, Economy Power 2.5



#### Other

Discrete Wire Connector Comment	Panel Mount
<b>Product Compliance</b> For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as

EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**



Housing, Receptacle, Wire-to-Wire / Wire-to-Panel, 3 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, White, Mating Retention, Economy Power 2.5








TE Part # 1-1969590-5 HSG, REC, PANEL MOUNT, SINGLE ROW, EP2.5



TE Part # 2314712-2 HSG, REC, PANEL MOUNT, SINGLE ROW,EP2.5

# Also in the Series | Economy Power 2.5

		Contraction of the second seco	
Insertion & Extraction Tools(1)	PCB Headers & Receptacles(494)	PCB Latches, Locks & Retainers(49)	Rectangular Power Connectors(43)

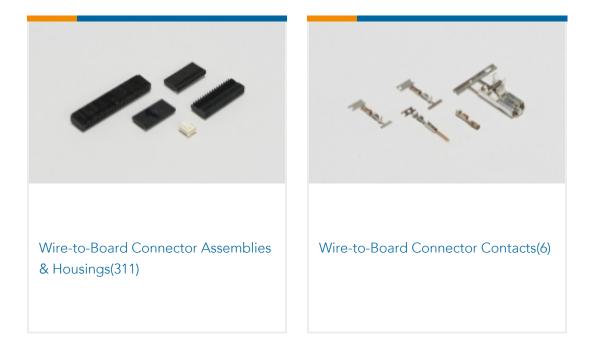


# Customers Also Bought

**C** For support call+1 800 522 6752

Housing, Receptacle, Wire-to-Wire / Wire-to-Panel, 3 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, White, Mating Retention, Economy Power 2.5



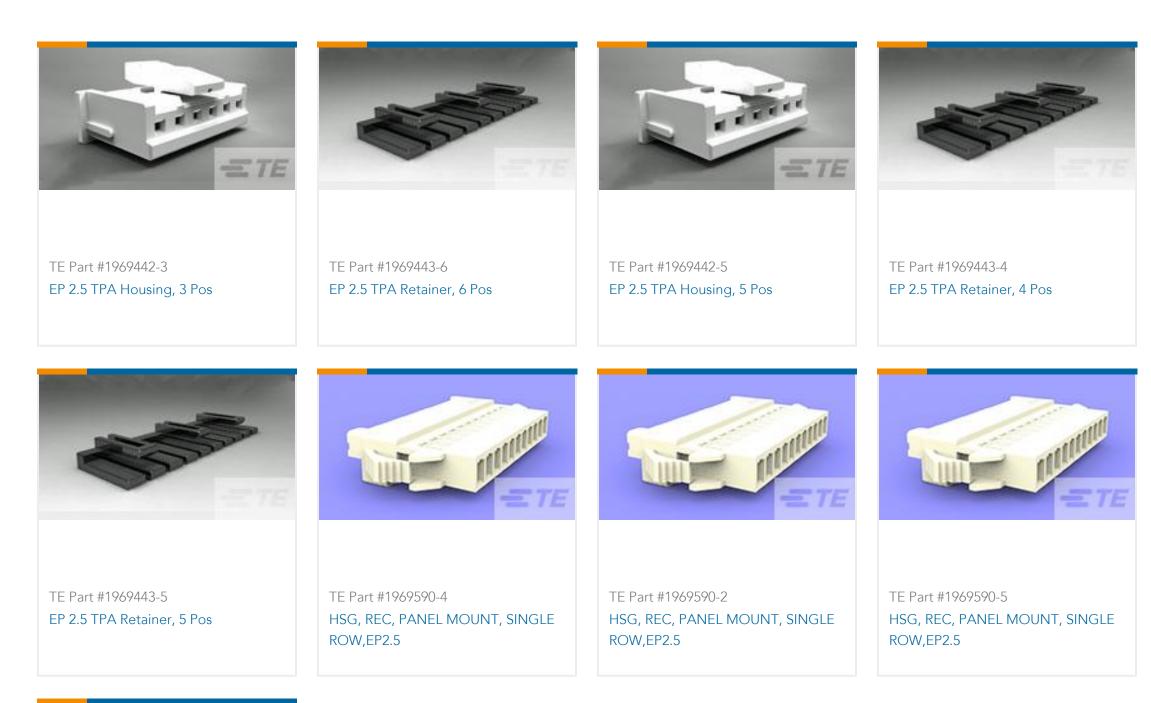



TE Part #1969590-6 HSG, REC, PANEL MOUNT, SINGLE ROW,EP2.5

# Documents

Product Drawings HSG, REC, PANEL MOUNT, SINGLE ROW, EP2.5

English

**CAD** Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1969590-3\_B.2d\_dxf.zip

English

Customer View Model ENG\_CVM\_CVM\_1969590-3\_B.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1969590-3\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**Product Specifications** 

**C** For support call+1 800 522 6752

Housing, Receptacle, Wire-to-Wire / Wire-to-Panel, 3 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, White, Mating Retention, Economy Power 2.5



Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

UL Report

English