


REVISIONS				
EC NO	DATE	REV	DESCRIPTION	CHANGER
CY14-5614	2013/11/01	D	UPDATE DRAWING (FOLLOW ED)	FZHANG01

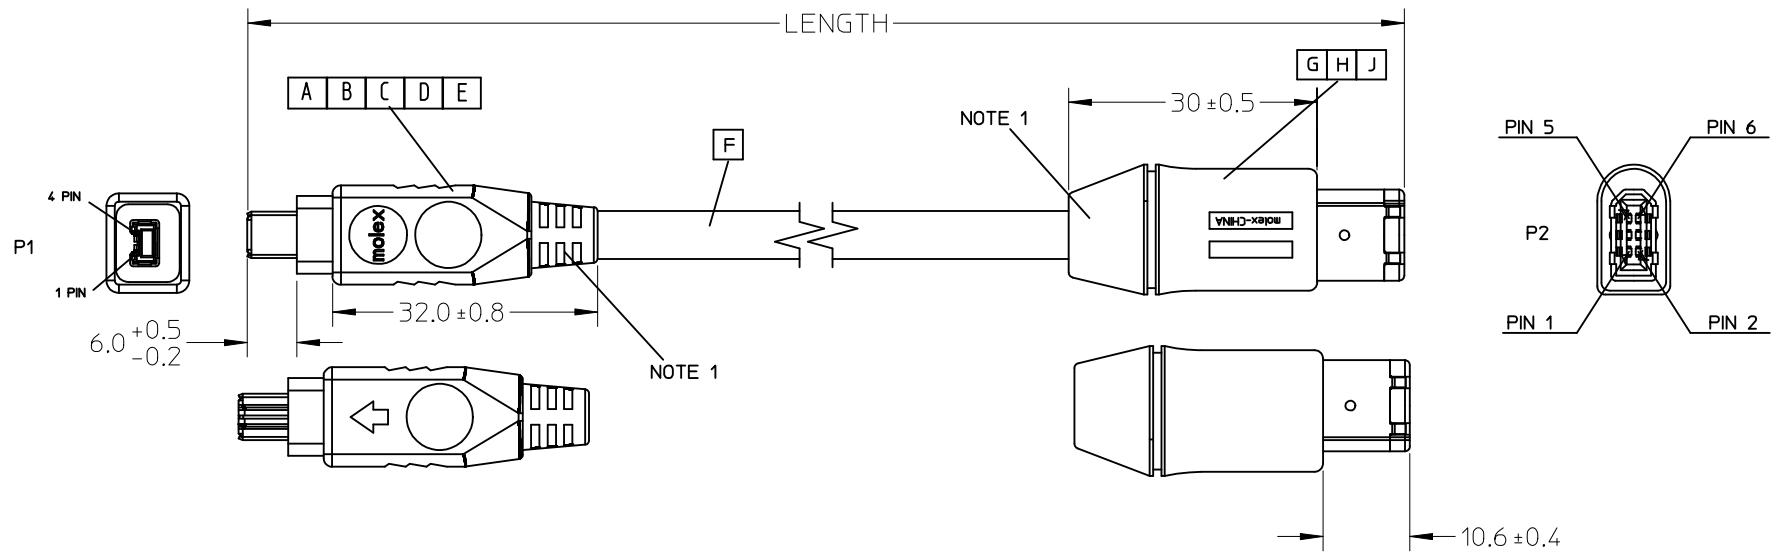

ITEM	DESCRIPTION	LENGTH	MOLEX P/N
3	IEEE 1394 4P-6P CABLE ASSY	4500+/-90	887632620
2	IEEE 1394 4P-6P CABLE ASSY	2000+/-40	887632610
1	IEEE 1394 4P-6P CABLE ASSY	1000+/-20	887632600

WIRING DIAGRAM:

SHELL	PIN 2	RED	PAIR2
PIN 4	PIN 4	GREEN	PAIR2
PIN 3	PIN 3	ORANGE	PAIR1
PIN 2	PIN 6	BLUE	PAIR1
PIN 1	PIN 5		
P1	P2	WIRE COLOR	TWIST PAIR

ITEM	DESCRIPTION	L	QTY.
J	SHELL COVER		1
H	SHELL		1
G	I/O HOUSING ASS'Y		1
F	2P*32AWG+F;SHLD;PVC;GY;4.2MM;1394 4P.		1
E	UPPER CAP		1
D	HOUSING SURPPOR		1
C	SHIELD REAR SHELL		1
B	SHIELD FRONT SHELL		1
A	PLUG		1

- NOTE:
- IEEE1394 OVERMOLD WITH PVC RESIN
 - ELECTRICAL PERFORMANCE
 - 2.1 DIELECTRICAL STRENGTH:500V/0.01S DC
 - 2.2 INSULATION RESISTANCE:100M OHM
 - 2.3. CONDUCTOR RESISTANCE: 3ohm MAX
 3. THIS PRODUCT MEET WITH RoHS COMPLIANCE

ENTER DESCRIPTION EC NO: CPG2014-1310 DRW: XJGU001 CHKD: FZHANG01 APPR: XAWANG	2013/11/04	2013/11/04	2013/11/05

GENERAL TOLERANCES (UNLESS SPECIFIED)	
4 PLACES	± --- ± ---
3 PLACES	± --- ± ---
2 PLACES	± --- ± ---
1 PLACE	± --- ± ---
ANGULAR ±1/2°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DRAWN BY		DATE	
JFZHENG		2007/09/07	
CHECKED BY		DATE	
XIE HUI		2007/09/07	
APPROVED BY		DATE	
BENTZ LIU		2007/09/07	
MATERIAL NO.			
88763-26XX			

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
INCH	INCH	
TITLE		
IEEE1394 4PIN TO 6PIN 1		
MOLEX INCORPORATED		
DOCUMENT NO.	SHEET NO.	
SD-88763-005	1 OF 1	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		