
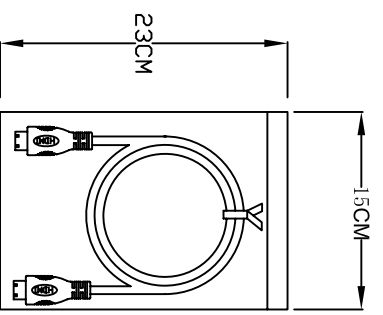


1. Wiring Diagram.

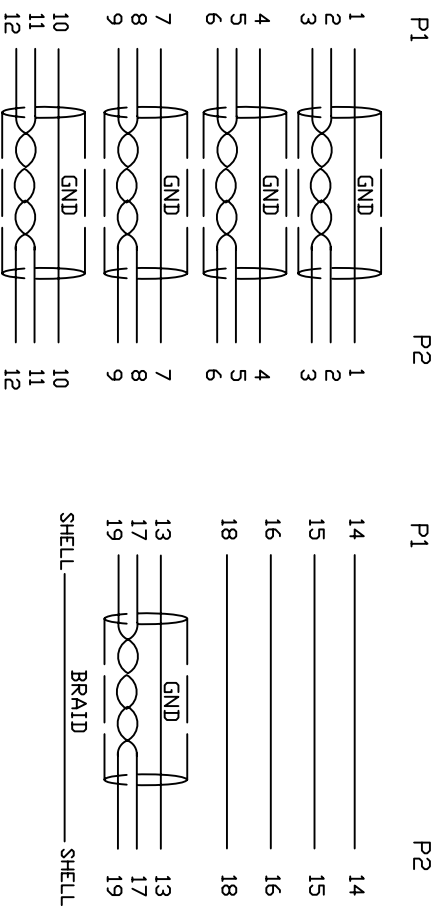

2. Cable test condition :

Open / Short : 100%

Insulation resistance : 5M ohms

Contact resistance : 2 ohm

Hipot : DC 300V / 1 sec

3. Each pcs with PE polybag.

5	COPER	W20MM*1.35MM	1			A	INITIAL RELEASE	2015/10/10
4	PVC	4SP PVC BLACK OVERMOLD	25g			REVISION#		
3	PE	LLDPE 500026 6201 INSIDE MOLDING	10g			DESCRIPTION		
2	CONN	HDMI C TYPE MALE PIN G/F ,SHELL PLATED NICKEL, INSULATION BLACK	2	P1,P2		TITLE		
1	CABLE	UL20276 (30AWG (7/0.1TS) *1P+EA+AL/MY) *5+30AWG (7/0.1TS) *4C +AEM(16/6/0.12AM) OD6.0 BLACK	1	5000mm		DWN NO.:		
NO.	PART NO.	DESCRIPTION	QTY	UNIT/REF		CUSTOMER P/N:		
BILL OF MATERIAL						CUSTOMER:		

DRAWN	EDWIN LAI	DATE	10/10/15
CHECKED	WIN C	DATE	10/10/15
APPROVAL			

DWN NO.:	742-20010-00500
REV	A
CUSTOMER:	
SHEET	1 OF 1

Cnc Tech, LLC

HDMI C/M TO HDMI C/M CABLE

