


Power Triple Lock TE Internal #: 5-1971876-3 Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 9 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock

View on TE.com >



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > High Temperature Plug — POWER TRIPLE LOCK

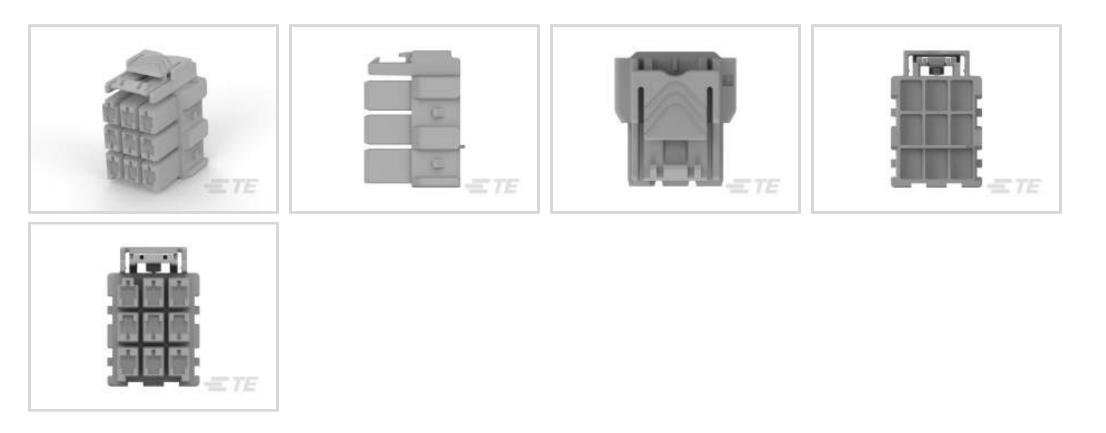

Rectangular Power Connector Type: Housing

Connector & Housing Type: Plug

Connector System: Wire-to-Wire

Number of Positions: 9

Centerline (Pitch): 6 mm [.236 in]

All High Temperature Plug — POWER TRIPLE LOCK (43)

Features

Product Type Features

Rectangular Power Connector Type	Housing			
Connector & Housing Type	Plug			
Connector System	Wire-to-Wire			
Sealable	No			
Connector & Contact Terminates To	Wire & Cable			
Configuration Features				
Number of Positions	9			
Number of Power Positions	9			
Number of Rows	3			
Electrical Characteristics				
Operating Voltage	600 VDC			
Body Features				

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 9 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



Cable Exit Angle	180°	
Connector & Keying Code	A	
Contact Features		
Contact Layout	Matrix	
Contact Retention Within Housing	Without	
Contact Type	Receptacle	
Termination Features		
Termination Method to Wire & Cable	Crimp	
Mechanical Attachment		
Panel Mount Feature	Without	
Connector Mounting Type	Cable Mount (Free-Hanging)	
Housing Features		
Centerline (Pitch)	6 mm[.236 in]	
Housing Color	Gray	
Housing Material	Nylon	
Dimensions		
Row-to-Row Spacing	8.1 mm[.319 in]	

Usage Conditions

Operating Temperature Range	-55 – 150 °C[-67 – 302 °F]				
Operation/Application					
Circuit Application	Power				
Identification Marking					
Circuit Identification Feature	With				
Industry Standards					
Glow Wire Material Rating	Material with GWIT \geq 775°C				
UL Rating	Recognized				
Agency/Standard	UL, VDE				
Approved Standards	UL E28476				
UL Flammability Rating	UL 94V-0				
Glow Wire Rating	GWT 850°C (Flame ≤ 30 sec)				
Packaging Features					

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 9 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



Packaging Method	Method Carton	
Other		
Power Connectors Comment	Complies with IEC 61984 Specification	
Product Compliance For compliance documentation, visit the product page on TE.com>		
EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	
Solder Process Capability	Not reviewed for solder process capability	

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 9 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock





Also in the Series | Power Triple Lock

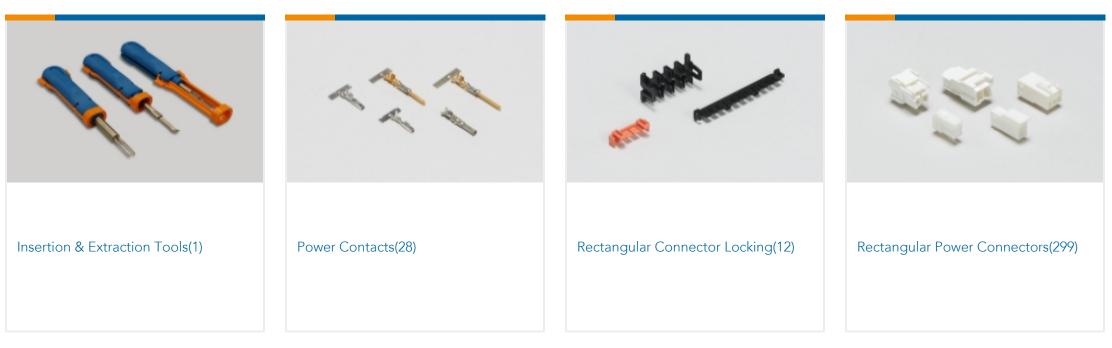

Customers Also Bought



(E TE	-112 TE	ETE
rt #1-1376390-2 POWER KEY 4P PLUG HSG RED	TE Part #5-1971775-3 POWER TRIPLE LOCK High Temperature Caps	TE Part #1971778-3 Locking Plate, POWER TRIPLE LOCK, TPA	TE Part #1971785-2 Receptacle Contact — POWER TRIPLE LOCK
July -		E.	
TE	ETE	THE STE	

TE Part #1971784-2 PTL TAB CONTACT, 16-19 AWG, 2X22 AWG

TE Part #1-176282-1 AMP UNIVERSAL POWER CAP 2P TE Part #5-1971776-3 PTL 2X3 PLUG HSG HIGH TEMP KEY A LGR

Documents

Product Drawings PTL 3X3 PLUG HSG HIGH TEMP KEY A LGR

English

CAD Files

3D PDF

3D

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 9 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



Customer View Model

ENG_CVM_CVM_5-1971876-3_E.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5-1971876-3_E.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5-1971876-3_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages 1-1773734-9 TE Power Triple Lock Quick Reference Guide - German

German

9-1773465-1Power Triple Lock QRG

English

Product Specifications

Application Specification

English

Product Environmental Compliance

TE Material Declaration

English

Agency Approvals

VDE Certificate

English

VDE Certificate

English