



REV	MODIFICATION	UPDATE DATE	SIGNATURE

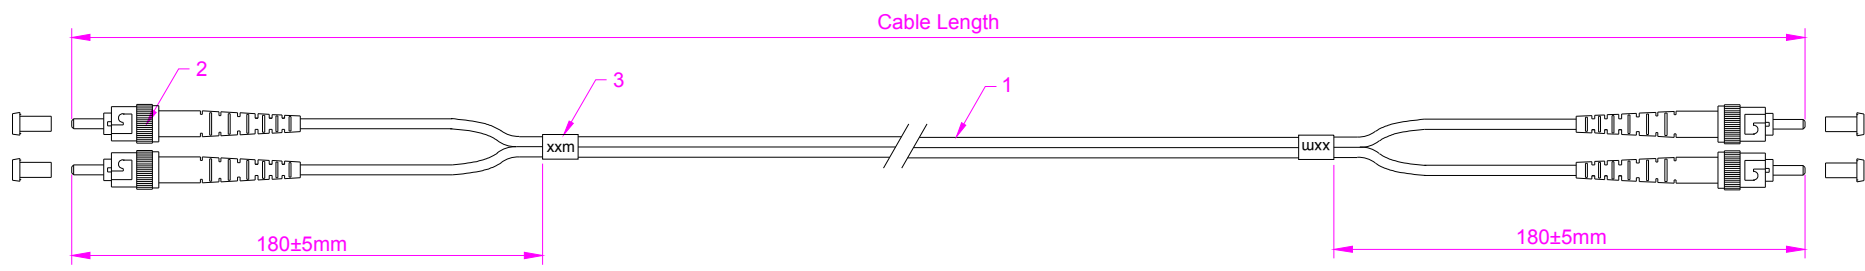

Technical requirements:

1. Performance requirements:
 Insertion loss: $IL \leq 0.2\text{dB}$
 Return loss: $RL \geq 35\text{dB}$
2. Fiber optic connectors meet IEC 61754, YDT1272 standards
3. Optical fiber cable in line with IEC60793-1, IEC 60794 standards
4. Fiber optic jumper complies with IEC 61300, GR-326, TIA/EIA568-B standards
5. A-B/B-A

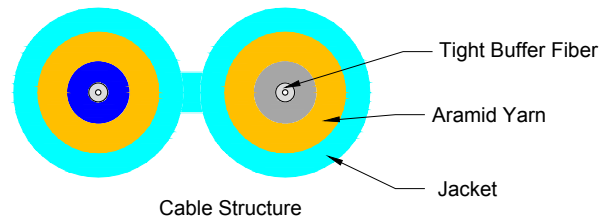

Cable Length	Tolerance
Cable Length < 1M	5cm
1M ≤ Cable Length < 15M	10cm
15M ≤ Cable Length < 30M	15cm
Cable Length ≥ 30M	Cable Length * 1%

Requirements Of Cable					
Cable Type				Fiber Type	OM4
Cable Diameter	2.0mm	Attenuation		@850nm < 3.5dB/km	
Cable Material	PVC			@1300nm < 1.5dB/km	
Tensile Strength	Long Term	60 N	Crush Resistance	Long Term	100 N/100mm
	Short Term	100 N		Short Term	500 N/100mm
Bending Radius	Static	30 D	Temperature Range	Storage Temperature -20 ~ +60	
	Dynamic	50D		Operating Temperature -20 ~ +60	

3	2		Cable Label
2	2		ST/UPC MM 2.0mm Duplex Connector(Metal Housing Black Boot)
1	A/R		OD: 2.0mm, Multimode 50/125 OM4 , Duplex, Fiber Optic Cable, Color:Aqua, PVC

ITEM	QTY	P/N	SPECIFICATIONS		
DRAW			Taylor Scott	DATE	18-08-2021
CHECK			lihuankuan	APPROVED	CUSTOMER NO
TITLE:			Fiber Optic Patch Cord ST/UPC-ST/UPC Duplex 2.0mm OM4 Multimode		
DWG NO			FJ5G4STST-XXM		REV
					A

