



- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18

**PROFILE**

Anodised aluminium, natural colour, matte finish.

**PINS SUPPORT**

Acetal resin based (POM) technopolymer, white colour.

**PINS**

AISI 304 stainless steel.

**ROLLERS**

Polyethylene based (PE) technopolymer, grey colour.

**STANDARD EXECUTIONS**

- GCA-4-RS: with shaped rollers, spherical contact.
- GCA-4-RC: with cylindrical rollers.
- GCA-4-RT: with shaped rollers, cylindrical contact.

**FEATURES AND APPLICATIONS**

GCA-4 central guides are self-supporting structures for the side guide of products with important vertical dimensions on conveyor belts (Fig. 1).

Depending on the product to transport, it is recommended to use:

- GCA-4-RS: for the guide of products in cans or in plastic containers;
- GCA-4-RC: for the guide of cardboard products, for a greater fluency;
- GCA-4-RT: for the guide of glass products, in case of accidental breakage they facilitate the expulsion of debris.

Supplied assembled in bars of 1440 or 3000 mm length.

**SPECIAL EXECUTIONS ON REQUEST**



- Central guides with rollers in different colours.
- Central guides with pins in acetal resin based (POM) technopolymer.

**ACCESSORIES ON REQUEST**

- BDG: zinc-plated steel connecting bar for guides.
- TGL: closing cap for guides.
- PGC-4: separation block for central guide.
- MPG-P: assembly pin.
- MPG-V: zinc-plated steel hammer head screw. (see GLA-1).



Fig.1

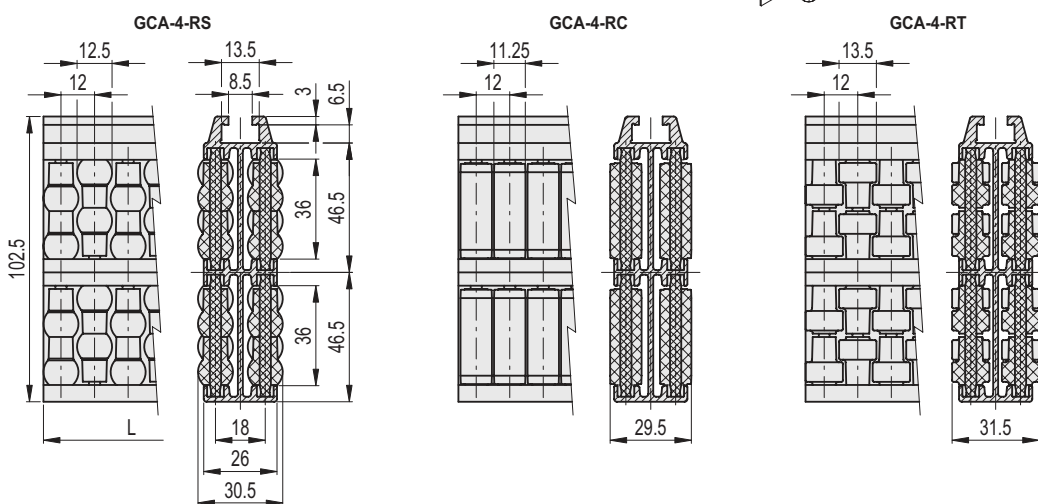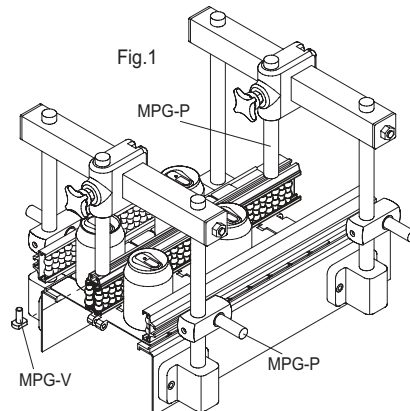

**GCA-4-RS**

**METRIC**

Code	Description	L	⚖
419134	GCA-4-RS-103-1440	1440	6260
419131	GCA-4-RS-103-3000	3000	13040

**GCA-4-RC**

**METRIC**

Code	Description	L	⚖
419135	GCA-4-RC-103-1440	1440	6260
419132	GCA-4-RC-103-3000	3000	13040

**GCA-4-RT**

**INOX STAINLESS STEEL METRIC**

Code	Description	L	⚖
419136	GCA-4-RT-103-1440	1440	6260
419133	GCA-4-RT-103-3000	3000	13040