


1. Wiring Diagram.

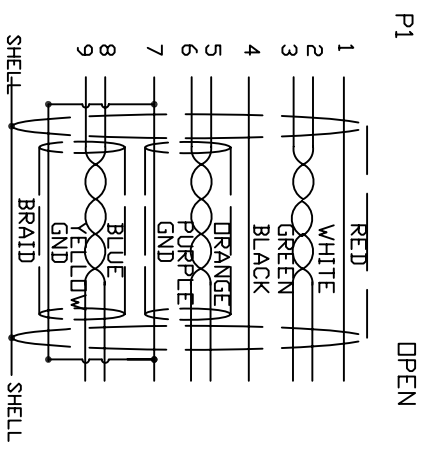

2. Cable test condition :

Open / Short : 100%

Insulation resistance : 5M ohms

Contact resistance : 2 ohm

Hipot : DC 300V / 1 sec

3. Each pcs with PE polybag.

4	PVC	45P PVC BLACK OVERMOLD	129	
3	PE	LLDPE 500026 6201	89	
2	CONN	USB3.0 B/M G/F BLUE	1	P1
1	CABLE	《28AWG (7/0.12TC) *IP+D(7/0.10TC)+AL+M》*2+28AWG (7/0.12TC) *1P+24AWG(7/0.21TC)*2C+A+D+B (96/0.12AM) OD5.5 BLACK	1	3000mm
NO.	PART NO.	DESCRIPTION	QTY	UNIT/REF
		BILL OF MATERIAL		

A	INITIAL RELEASE	2014/08/28
REVISION#	DESCRIPTION	DATE
	103-1043-BL-00300	REV A
	CABLE 3.0 USB B MALE TO OPEN END	
DRAWN	DATE	CUSTOMER P/N:
WENC	08/24/14	
CHECKED	DATE	CUSTOMER:
EDWIN	08/24/14	
APPROVAL		SHEET 1 OF 1

Cnc Tech, LLC

