
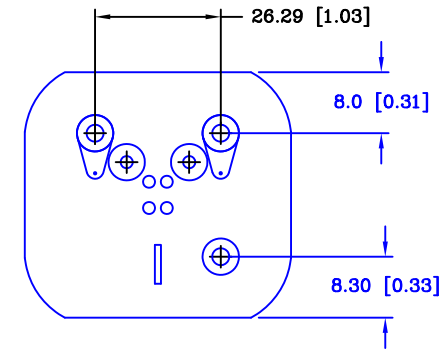
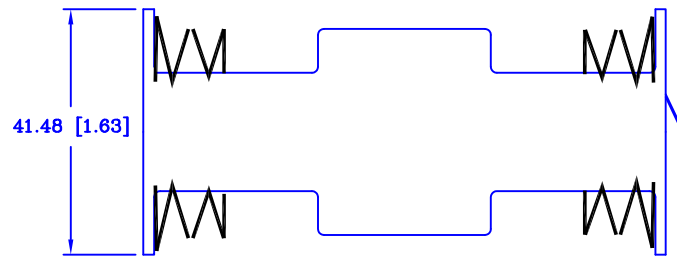
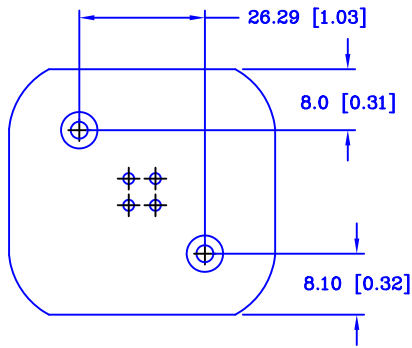



| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|---------|-----|---|------|------|-----|
| 8/06/14 | C | UPDATED TO ROHS 2 COMPLIANT | T.B. | B.S. | |
| 5/19/17 | D | DIM. 8.0 WAS 9.40 DIM. 8.10 WAS 9.40 DIM. 8.30 WAS 9.40 | T.B. | B.S. | |

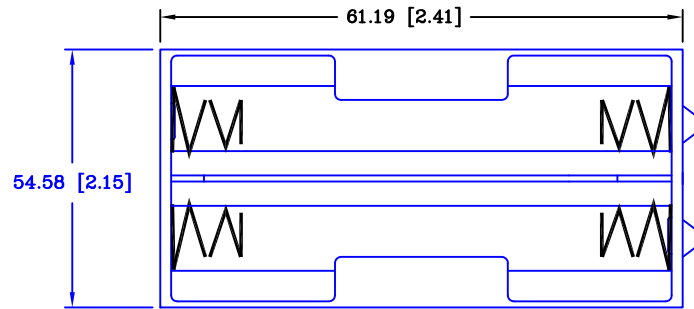

SPECIFICATIONS

Plastic material - Polypropylene, PP-1040
 Flammability Rating -UL94-HB, UL File NO. E216959
 Temperature Range: -10°C to +100°C
 Springs - Nickel Plated Spring Steel
 Rivets - Brass, Nickel Plated
 Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J000
 ROHS 2 COMPLIANT

| | | | |
|--------------------------------|---|--------------------------|-----------------------------------|
| Tolerance (Except as noted) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | | |
| decimal ±.5 (.020) | | Scale 1=1 | Drawn By T.S. Approved By T.B. |
| Fractional ± .8 (.030) | Title FOUR "C" CELL HOLDER WITH SOLDER LUGS | | |
| Angular ± 3° | Date 8/06/14 | Drawing Number BH22CL | |