



20 MHz LC High Pass Filter



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Part Number: AE20H9760

Electrical Specifications

- Cut Off Frequency:** 20 MHz
- Pass Band Frequency:** 20 - 300 MHz
- Insertion Loss @ 20-300 MHz:** < 1.5 dB
- Return Loss:** > 14 dB Min
- Rejection:** > 28 dB
- Impedance:** 50 Ohms
- Power Handling:** 10 Watts


Mechanical

- Mounting Method:** Threaded Holes
- Connector Type:** SMA(F)
- Dimensions:** 3.75 x 1.0 x 0.5 in.

Environmental

- Operating Temperature:** -30° to +70° C
- Storage Temperature:** -45° to +85° C
- Shock:** 10 G. 11ms
- Vibration:** 10 G. 5 to 200 Hz

Outline Drawing:

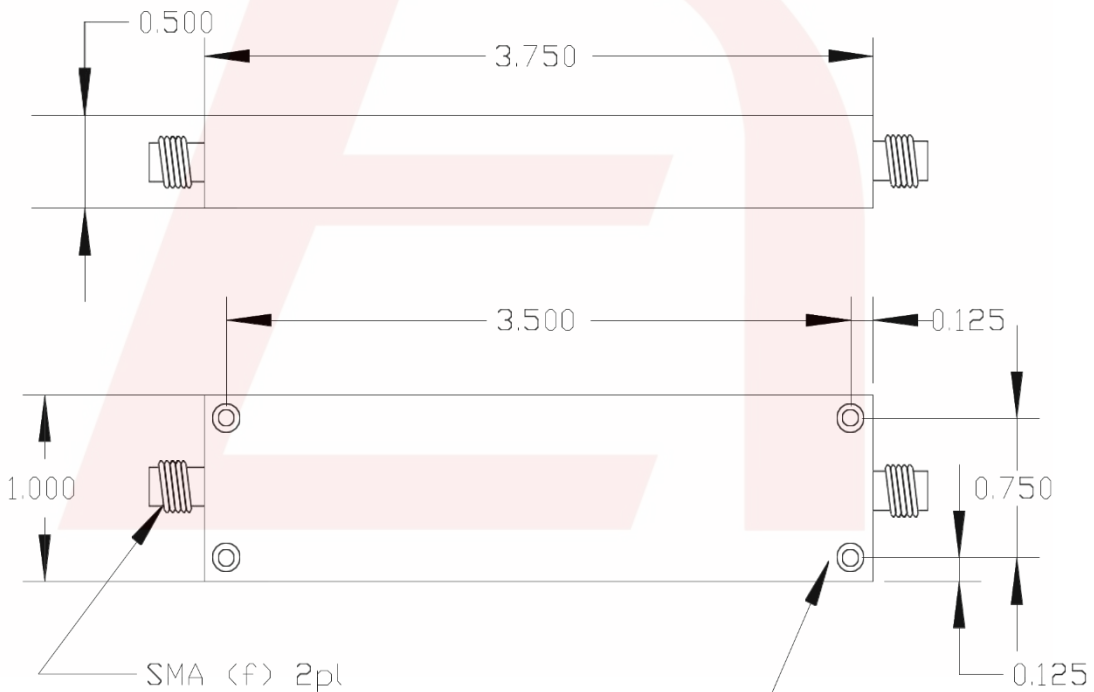

0.093" dia thru, c'bore 0.156dia .1" dp 4pl
for #2 Fillister Hd screw

Dwg 986187

Tolerance: +/-0.01 inches [+/- 0.3mm]
Angles: +/- 1 Deg.

DS-H9760-08202015-Rev0

*Tolerance as shown unless otherwise specified in the datasheet electrical specification tables above.

*When max dimensions are called out the above tolerances do not apply as long as it is under the max call out.

70 Outwater Lane Phone: (973) 772-4242
Garfield, NJ 07026 Fax : (973) 321-3941

Email: sales@anatechelectronics.com
Web: www.anatechelectronics.com