

SPECIFICATION

1. SCOPE

This specification covers the characteristics of size 0201, Base Metal C0G dielectric, 47 pF capacitance, +/- 5% tolerance, 50 VDC rated ceramic chip capacitors with nickel barrier (90% tin/10% lead) termination.


2. DIELECTRIC CHARACTERISTICS - COG (BN)

Operating Temperature Range: -55°C to +125°C
Temperature Coefficient: 0 +/- 30 ppm/°C
Dissipation Factor: 0.1% Max. @ 25°C
Insulation Resistance, 25°C: >10 Giga-Ohms

Dielectric Withstanding Voltage: 125 VDC Aging Rate: 0% per decade

Test Parameters: 1MHz, 1.0 Volts +/- 0.2 Vrms, 25°C

3. PHYSICAL DIMENSIONS (NOT SCALED)

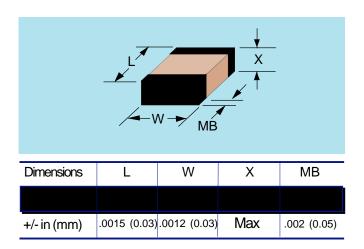

4. PART NUMBER DESCRIPTION

0201 BN 470 J 500 Y T

0201 = Size

BN = COG Dielectric (Base Metal Electrodes)

470 = Capacitance Code (pF): First two digits are significant, third digit denotes number of zeros

J = Capacitance tolerance: J = +/-5%

500 = DC Voltage Rating: First two digits are significant, third digit denotes number of zeros

Y = Termination: Nickel Barrier with 90% Tin / 10% Lead

T = Packaging: Tape and Reel

REVISION: A

NOVACAP P/N: 0201BN470J500YT CUSTOMER: CUST. P/N:

SPEC DESIGNER MK
SPEC MANAGER MK
ENGINEERING MK

MK 5/25/17 MK FOR BN 5/25/17 MK FOR BN 5/25/17