
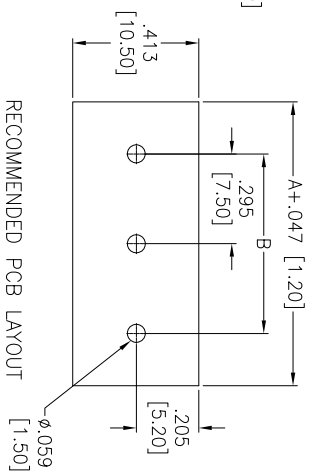
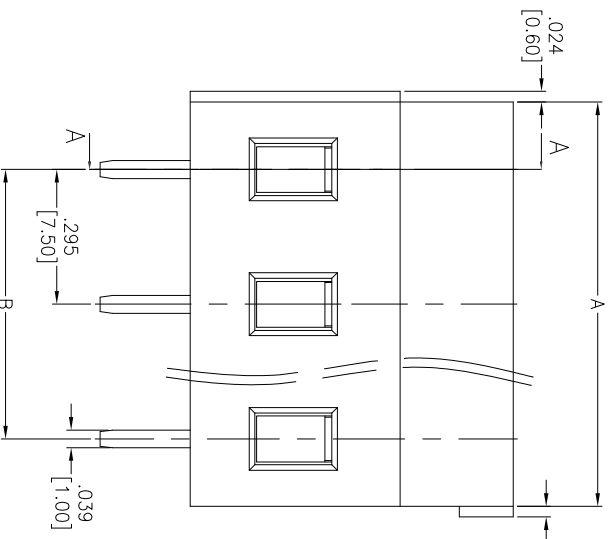
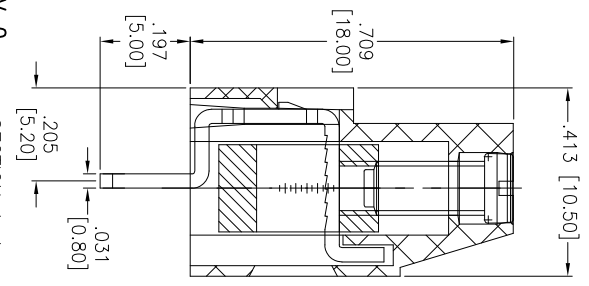


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/25/14	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

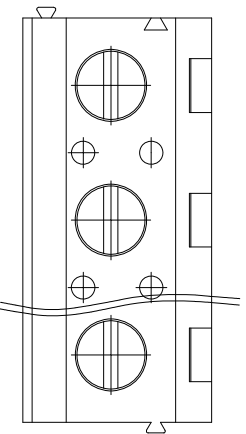

**SPECIFICATIONS:**  
 Material: Insulator: PA66, rated UL 94V-0  
 Insulator color: Green  
 Screw: Steel, M3.0/Zinc plated  
 Cage: Brass, Nickel plated  
 Pin Header: Brass, Tin plated  
 Electrical:  
 Voltage rated: 300 VAC  
 Current rated: 16 Amps  
 Contact resistance: 20 mΩ  
 Insulation resistance: 500 MΩ @ 500 VDC  
 Withstanding voltage: 2000V AC/1 Min  
 Mechanical:  
 Solid wire: 26-12AWG 2.5mm<sup>2</sup>  
 Torque (Lb-in): 0.5Nm (4.5lb-in)  
 Temperature Rating:  
 Operating temperature: -40°C to +105°C  
 Environmental:  
 Lead free, RoHS compliant.

Positions: 02 thru 24  
 A = .295 [7.50] x No. of Positions  
 B = .295 [7.50] x No. of Spaces

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE IN INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES: .X ± .10 ØXX ± .015  
 .XX ± .020 ØXXX ± .010  
 .XXX ± .015 ØXXXX ± .010

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EURO BLOCK, .295 [7.50] PITCH  
 SIZE: PART NO. EB147A-XX-M  
 REF: S00067C SCALE: NTS SHEET 1 OF 1

