


PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/21/02	BS
B	REVISE DRAWING, RFS. 6781, DMR		
C	REVISE DRAWING, RFS. 13067, EM	03/04/08	BS
D	ADD ENCE MARK, RFS. 22491, EM	03/04/12	BS
E	ADD 'EAC' AND FRANCE APPROVALS, 'ENEC' APPROVAL ON CONNECTOR ONLY', RFS. 26647, BS	02/07/17	BS

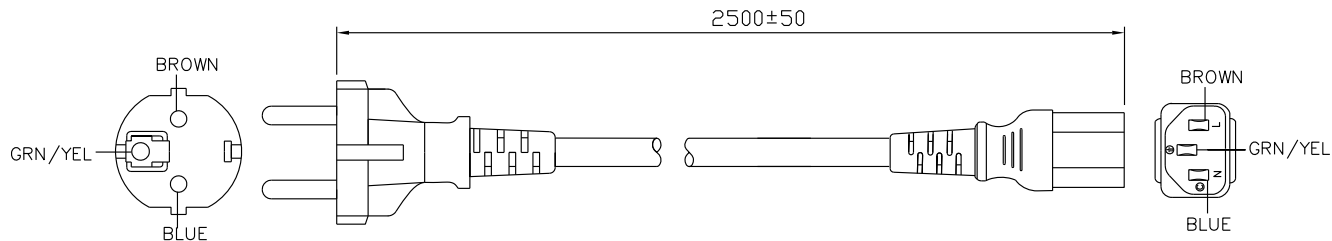


GENERAL SPECIFICATIONS:

RATING: 10A / 250V AC
 CABLE TYPE / SIZE: H05VV-F, 3 x 1.0 mm²
 TEMPERATURE RATING: 70° C
 CONDUCTOR COLORS: BROWN / BLUE/ GREEN-YELLOW
 CABLE JACKET COLOR: BLACK
 OVERALL LENGTH (L): 2500 ± 50 mm
 CABLE OUTER DIAMETER: 7.1 ± 0.2 mm
 END 'A' PLUG; CEE 7/7
 END 'B' IEC 320 / C13
 APPROVALS PLUG: VDE, N, S, D, FI, KEMA, UTE, CEBC, OVE, IMQ
 APPROVALS CABLE: VDE, N, S, D, FI, KEMA, SEV, CEBC, OVE
 APPROVALS CONNECTOR: VDE, N, S, D, FI, KEMA, UTE, CEBC, OVE, IMQ, ASEV

PACKING:

HANKING

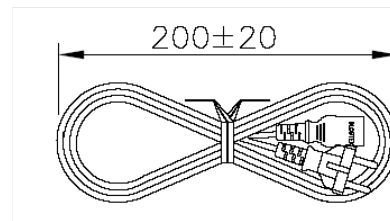

NOTES:

1. PLUG MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



2. PLUG AND CONNECTOR ARE BOTH ON THE SAME SIDE OF THE HANK.

3. CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



RELEASED
 By N.Frost at 11:28 am, Mar 08, 2017



DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
		TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
		MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY: BS	DATE: 06/09/02	DWG TITLE: EUROPEAN POWER CORD		
DRAWN: NF	DATE: 06/09/02	FSCN No.: G, CC	SIZE: A	REV. E
APRVD: BS	DATE: 06/17/02	SCALE: NONE	PART NO: 23144272M5701-T(R)	SHEET 1/1

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice