


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
H	-	B	ECR-15-010046	13JUL15	SW	RZ	

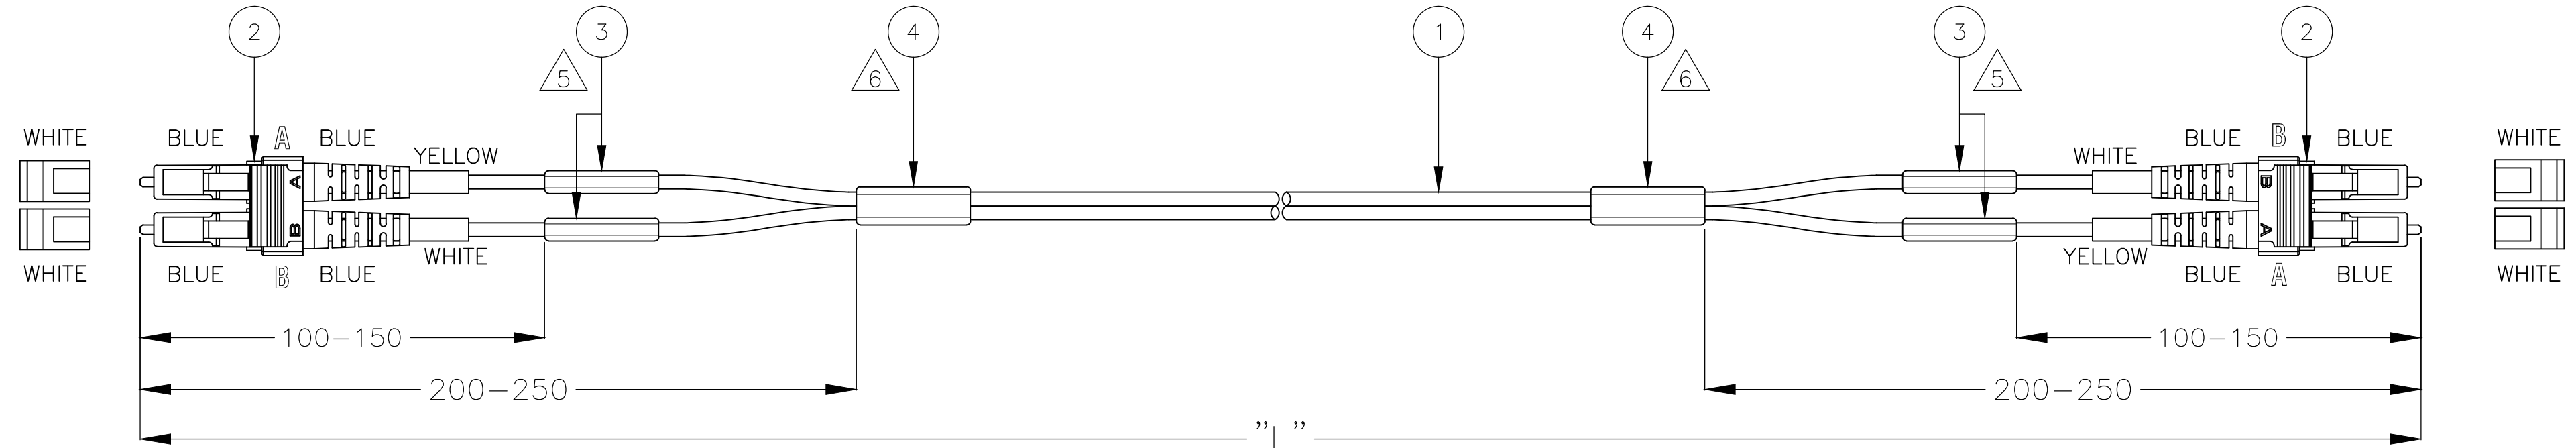


ASSEMBLY CONNECTIVITY	
LC CONN.	LC CONN.
YELLOW (A)	WHITE (B)
WHITE (B)	YELLOW (A)

STANDARD LENGTHS ACCORDING TO CUSTOMER DRAWING 1206850	
PART NUMBER	"L" (meter)
X-2061531-Y	XY.0

NOTES:

- 1 ATTENUATION ≤ 0.3 dB, MEASURED AT 1310 nm ACCORDING TO I.E.C. 61300-3-4 INSERTION METHOD B
- 2 RETURN LOSS ≥ 45 dB, IN MATED CONDITION AGAINST REFERENCE CONNECTOR AT 1310 nm
- 3 TUNED CONNECTORS
- 4 CABLE INFORMATION:
 - CORE DIAMETER: 9/125 μ m (2x)
 - OUTER JACKET DIAMETER: 1.8 x 3.6 mm
 - OUTER JACKET COLOUR: YELLOW
 - OUTER JACKET MATERIAL: LSZH
- △5 INFORMATION ON LABEL, SEE DETAIL FOR EXAMPLE
 - BARCODE
 - UNIQUE SERIAL NUMBER
 - ASSEMBLY LENGTH
 - TE CONNECTIVITY PART NUMBER & ORDER NUMBER
 - ATTENUATION AND RETURN LOSS AT 1310 nm
- △6 BLANK LABEL
 - * ONLY ONE LABEL IN THE MIDDLE OF THE CABLE IS USED FOR LENGTHS < 0.6 METER

EXAMPLE LABEL DETAIL:

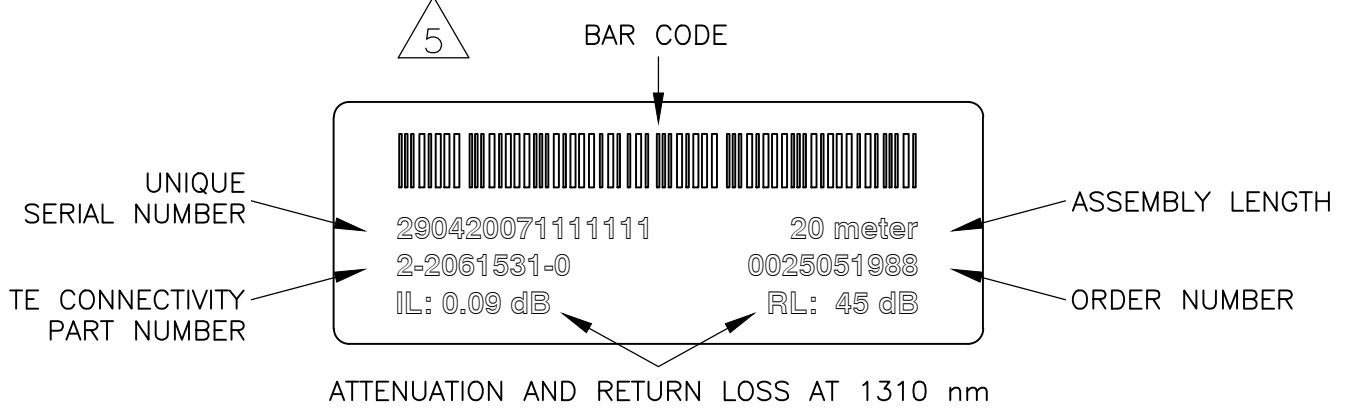

Qty	Description	Item
2	BLANK LABEL	4
4	INFORMATION LABEL	3
2	LC DUPLEX CONNECTOR, ULTRA SHORT, SINGLE MODE, BLUE	2
L	FOCAB 1.8MZ 9/125 G657A, YELLOW, LSZH	1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. COOLEN 13APR2011		
DIMENSIONS: mm		CHK R. GROENEVELD 01JUN2011		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A. HENGELMOLEN 01JUN2011	NAME	
0 PLC ± 1.0		PRODUCT SPEC	FIBER OPTIC LEAD 1.8MZ	
1 PLC ± 0.5		APPLICATION SPEC	LC/DPX - LC/DPX ULTRA SHORT	
2 PLC ± -			SINGLE MODE 9/125 G657A	
3 PLC ± -			SIZE	CAGE CODE
4 PLC ± -			A2	00779
ANGLES ± -		WEIGHT	DRAWING NO	
FINISH			C=2061531	
		CUSTOMER DRAWING	SCALE	SHEET
			NTS	1 of 1
			REV	B