



REV	ECO	DATE
D	11825	05/18/1992
E	11948	08/06/1992
F	58265	05/13/2022

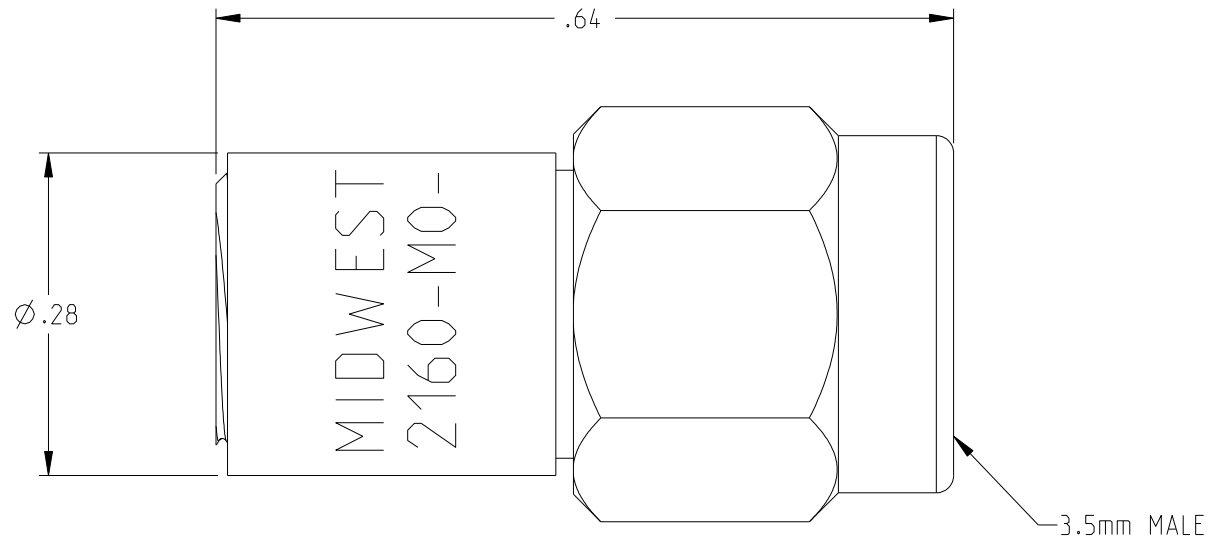

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS & FINISH:
  - 1.1 HOUSING AND COUPLING NUT: PASSIVATED STAINLESS STEEL
  - 1.2 SUPPORT BEAD: POLYETHERIMIDE (ULTEM)
  - 1.3 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER
  - 1.4 GASKET: SILICONE RUBBER
2. SPECIFICATIONS:
  - 2.1 FREQUENCY RANGE: DC TO 26.5 GHz
  - 2.2 VSWR (MAX):
    - DC TO 18.0 GHz: 1.12:1
    - 18 TO 26.5 GHz: 1.18:1
  - 2.3 INPUT POWER (MAX): 2 WATTS AT +25°C, DERATED LINEARLY TO 1 WATT AT +125°C
  - 2.4 IMPEDANCE: 50 OHMS NOMINAL
  - 2.5 TEMPERATURE RANGE: -65°C TO +125°C

 <small>NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting.</small> <small>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018</small>	Model No:	TRM-2160-M0-35M-02		MIDWEST MICROWAVE		
	RoHS2	<input checked="" type="checkbox"/>	2015/863/EU	Title: TERMINATION 3.5MM MALE		
	UNLESS OTHERWISE SPECIFIED UNITS: INCH	3RD ANGLE PROJECTION	ENGINEER:	J. KEREKES	Drawing No.	TRM-2160-M0-35M-02-01
	DATE:	05/16/2022	REVISION:	F	Size	A
DO NOT SCALE DRAWING		Workmanship Std:	Sheet		1 OF 1	