

## Base strip - MC 1,5/ 2-G-3,5-AU - 1995499

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

Header, Nominal current: 8 A, Number of positions: 2, Pitch: 3.5 mm, Color: green, Contact surface: Gold



### Key commercial data

Packing unit	1
Minimum order quantity	50
GTIN	 4 017918 992910
Custom tariff number	85366990
Country of origin	GERMANY

### Technical data

#### Dimensions / positions

Pitch	3.5 mm
Dimension a	3.5 mm
Number of positions	2

#### Technical data

Range of articles	MC 1,5/...-G
Connection in acc. with standard	EN-VDE
Nominal current I <sub>N</sub>	8 A
Nominal voltage U <sub>N</sub>	160 V
Color	green
Nominal voltage, UL/CUL Use Group B	300 V
Nominal current, UL/CUL Use Group B	8 A
Nominal voltage, UL/CUL Use Group D	300 V
Nominal current, UL/CUL Use Group D	8 A

### Classifications

#### eclass

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402

# Base strip - MC 1,5/ 2-G-3,5-AU - 1995499

## Classifications

etim

ETIM 3.0	EC001121
ETIM 4.0	EC002637

unspsc

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

## Approvals

Approvals

---

Approvals

CSA / UL Recognized / VDE report with production monitoring / cUL Recognized / IECEE CB Scheme / GOST / cULus Recognized

---


Ex Approvals


---

Approvals submitted

---

## Approval details

CSA 		
	B	D
Nominal current IN	8 A	8 A
Nominal voltage UN	300 V	300 V

UL Recognized 		
	B	D
Nominal current IN	8 A	8 A
Nominal voltage UN	300 V	300 V

# Base strip - MC 1,5/ 2-G-3,5-AU - 1995499

## Approvals

VDE report with production monitoring

Nominal current I <sub>N</sub>	8 A
Nominal voltage U <sub>N</sub>	160 V

cUL Recognized

	B	D
Nominal current I <sub>N</sub>	8 A	8 A
Nominal voltage U <sub>N</sub>	300 V	300 V

IECEE CB Scheme


Nominal current I <sub>N</sub>	8 A
Nominal voltage U <sub>N</sub>	160 V

GOST

cULus Recognized

## Drawings

### Diagram

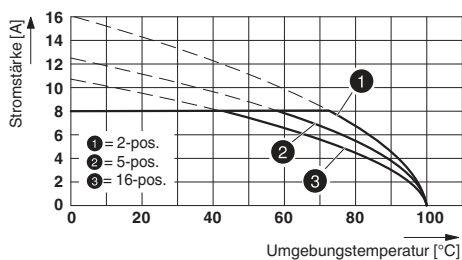

Type: MCVR 1,5/...-ST-3,5 AU with MC 1,5/...-G-3,5 AU