

PRECISION 5.0 VOLT MICROPOWER VOLTAGE REFERENCE

ISSUE 3 - NOVEMBER 2002

ZR4040-5.0

DEVICE DESCRIPTION

The ZR4040-5.0 uses a bandgap circuit design to achieve a precision micropower voltage reference of 5.0 volts. The device is available in a small outline surface mount package, ideal for applications where space saving is important, as well as packages for through hole requirements.

The ZR4040-5.0 design provides a stable voltage without an external capacitor and is stable with capacitive loads. The ZR4040-5.0 is recommended for operation between $60\mu\text{A}$ and 15mA and so is ideally suited to low power and battery powered applications.

Excellent performance is maintained to an absolute maximum of 25mA , however the rugged design and 20 volt processing allows the reference to withstand transient effects and currents up to 200mA . Superior switching capability allows the device to reach stable operating conditions in only a few microseconds.


FEATURES

- Small outline SOT23 package
- TO92 style package
- No stabilising capacitor required
- Typical T_c $20\text{ppm}/^\circ\text{C}$
- Typical slope resistance 0.33Ω
- 2% and 1% tolerance
- Automotive temperature range
- Operating current $60\mu\text{A}$ to 15mA
- Transient response,stable in less than $10\mu\text{s}$

APPLICATIONS

- Battery powered and portable equipment.
- Metering and measurement systems.
- Instrumentation.
- Test equipment.
- Data acquisition systems.
- Precision power supplies.

SCHEMATIC DIAGRAM

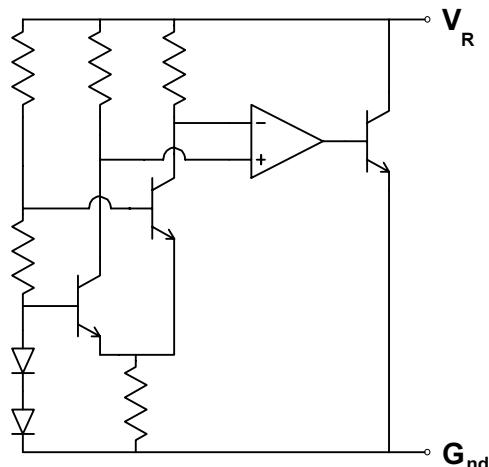

ZR4040-5.0

ABSOLUTE MAXIMUM RATING

Reverse Current	25mA
Forward Current	25mA
Operating Temperature	-55 to 125°C
Storage Temperature	-55 to 125°C

Power Dissipation ($T_{amb}=25^{\circ}C$)

SOT23	330mW
E-Line, 3 pin (TO92)	500mW

ELECTRICAL CHARACTERISTICS


TEST CONDITIONS (Unless otherwise stated) $T_{amb}=25^{\circ}C$

SYMBOL	PARAMETER	CONDITIONS	LIMITS			TOL. %	UNITS
			MIN	TYP	MAX		
V_R	Reverse Breakdown Voltage	$I_R=150\mu A$	4.95 4.90	5.0 5.0	5.05 5.10	1 2	V
I_{MIN}	Minimum Operating Current	-55 to 125°C		30	60		μA
I_R	Recommended Operating Current		0.06		15		mA
$T_C \dagger$	Average Reverse Breakdown Voltage Temp. Co.	-40 to 85°C $I_{R(min)}$ to $I_{R(max)}$		20	100		ppm/°C
$T_C \ddagger$	Average Reverse Breakdown Voltage Temp. Co.	-55 to 125°C $I_{R(min)}$ to $I_{R(max)}$		40	125		ppm/°C
$R_S \S$	Slope Resistance			0.33	1.5		Ω
Z_R	Reverse Dynamic Impedance	$I_R = 1mA$ $f = 100Hz$ $I_{AC}=0.1 I_R$		0.4	1.0		Ω
E_N	Wideband Noise Voltage	$I_R= 1mA$ $f = 10Hz$ to $10kHz$		105			μV (rms)

$$\dagger \quad T_C = \frac{(V_{R(max)} - V_{R(min)}) \times 1000000}{V_R \times (T_{(max)} - T_{(min)})}$$

Note: $V_{R(max)} - V_{R(min)}$ is the maximum deviation in reference voltage measured over the stated operating temperature range.


$$\S \quad R_S = \frac{V_R \text{ Change } (I_R(\text{min}) \text{ to } I_R(\text{max}))}{I_R(\text{max}) - I_R(\text{min})}$$

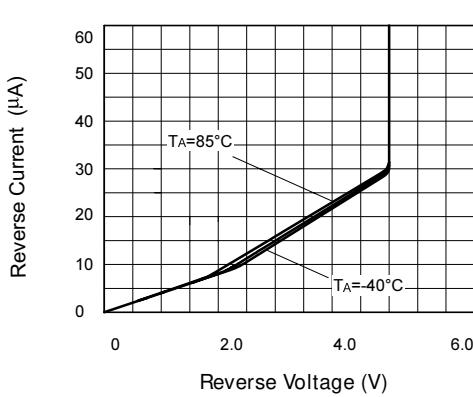

Reverse Characteristics

ZR4040-5.0


TYPICAL CHARACTERISTICS

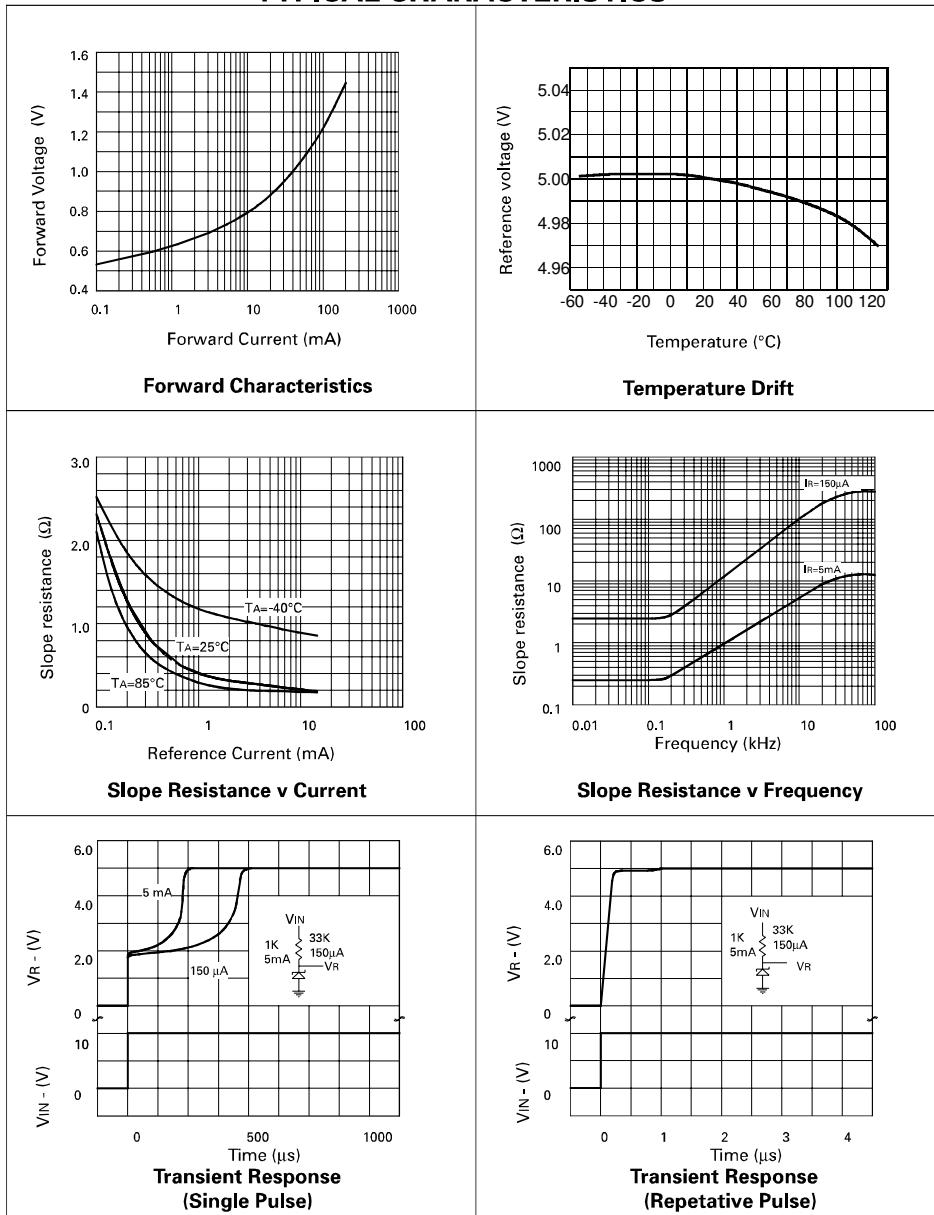

ZR4040-5.0


CONNECTION DIAGRAMS

E-Line, 3 pin, Rev Package Suffix – R



*Bottom View –
Pin 3 floating or connected to pin 1*

SOT23 Package Suffix – F



*Top View –
Pin 1 floating or connected to pin 2*

ORDERING INFORMATION

Part Number	ToI%	Package	Partmark
ZR40402F50	2	SOT23	50L
ZR40401F50	1	SOT23	50M
ZR40402R50	2	E-Line *	ZR4040250
ZR40401R50	1	E-Line *	ZR4040150

* E-Line, 3 pin Reversed