



Electrical specifications

Cutoff Frequency (Fc): 260 MHz

Passband: DC-200 MHz

Insertion loss: 0.5 dB @ 200 MHz

Return loss: >15 dB

High Side Rejection: 60 dB from 300-1000 MHz

Power Handling: 10 W

Mechanical

Connector Type: SMA (F)

Dimensions: 1.5 x 0.75 x 0.5 inches

Environmental

Operating Temperature: 0 to +85 deg.C


Storage temperature: -65 to +95 deg.C

Shock: 20 G's, ½ sine, 11ms

Vibration: 10 G's, 10-2000Hz

Relative Humidity: 0-95%

Outline Drawing:

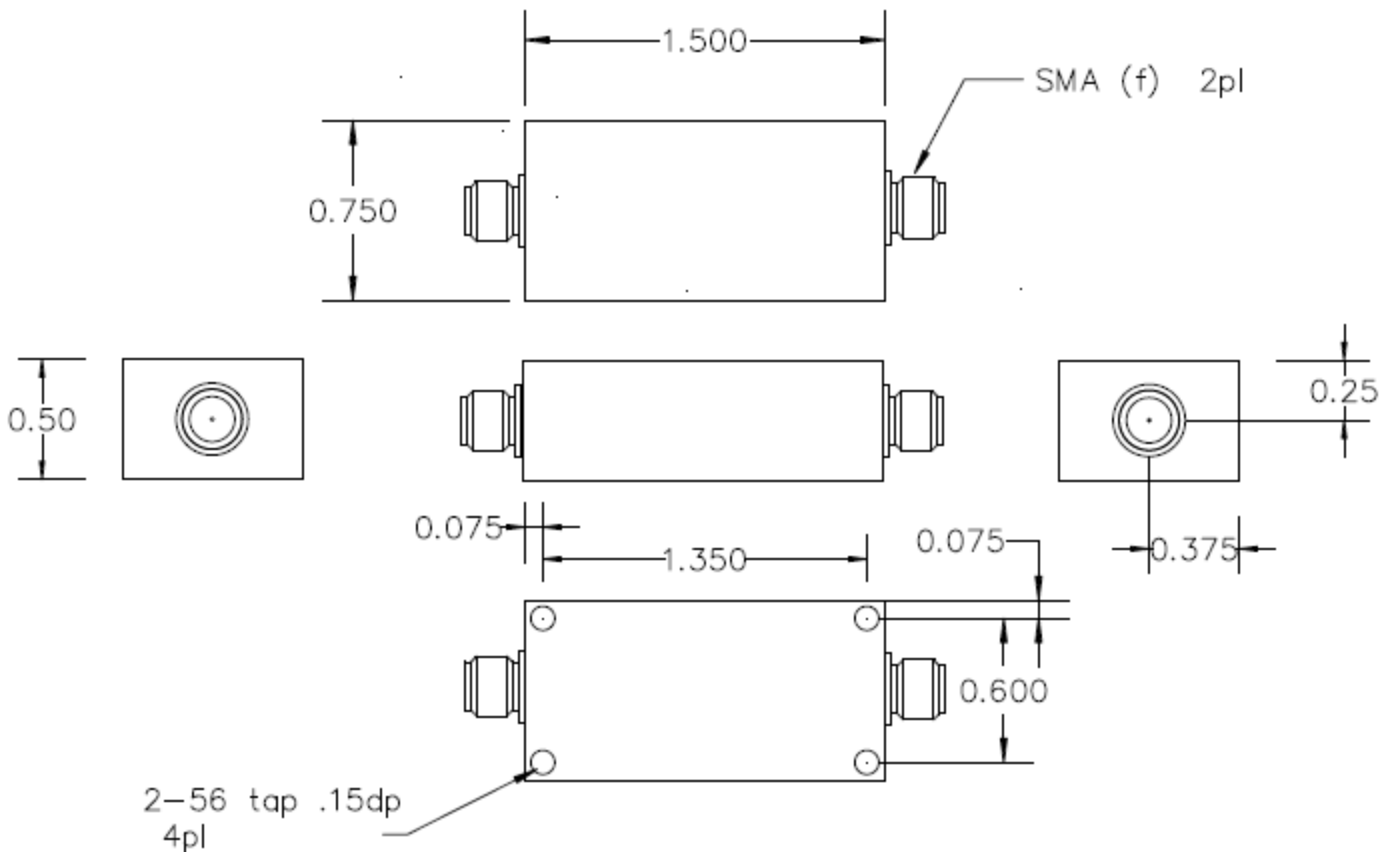



Response Plot:

