

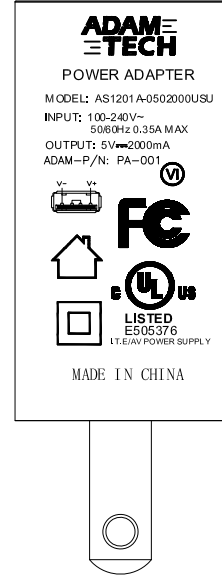


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/18/21	
A		ADDED TOLERANCE	6/10/21	WX/AC

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

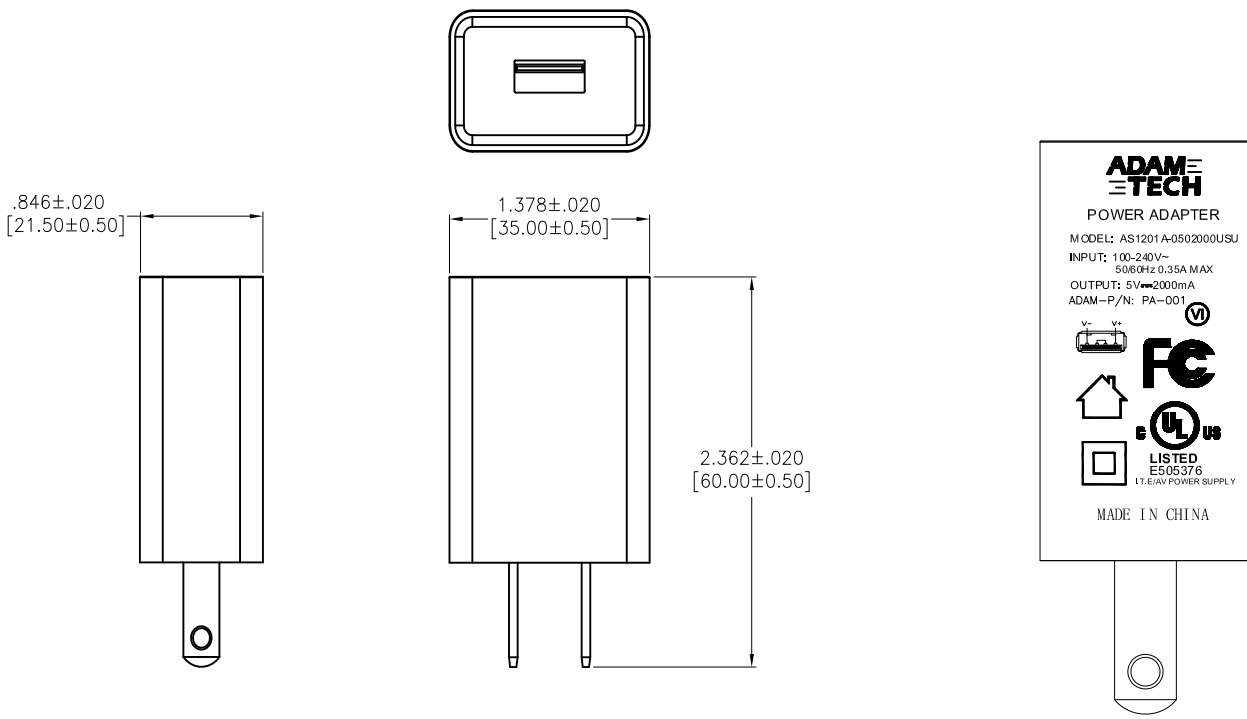

**SPECIFICATIONS:**  
 Material:  
 Case, cover & Chassis: PPHOX, rated UL94V-0, Color: Black  
 AC Blades: Brass, Nickel plated  
 Electrical:  
 Input:  
 Voltage: 100Vac to 240Vac  
 Current: 0.35A Max. @ 100Vac input & max load  
 Frequency: 60Hz / 50Hz  
 Output:  
 Voltage: 5.0Vdc  
 Current: 2.0A max. (Current Range: 0 ~ 2.0A)  
 Load Regulation: ±5%  
 Line Regulation: ±3%  
 Insulation Resistance: 10 Mohms min @ 500VDC  
 Dielectric withstanding voltage (Hi-pot): 3,000V AC For 1 Minute  
 Leakage Current: 0.25mA max. @ 230V AC/50Hz  
 Temperature Rating:  
 Operating Temperature: 0°C to +40°C  
 Storage Temperature: -40°C to +70°C  
 Environmental:  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	WX	3/18/21
CHECKED	AC	3/18/21
APPROVED		

**ADAM TECH** 909 Rahway Avenue,  
 Union, NJ 07083  
 Phone: 908-687-5000  
 Fax: 908-687-5710

TITLE: POWER ADAPTER, NEMA 1-15 MALE TO  
 USB TYPE A FEMALE, 5V, 2A, COLOR BLACK

SIZE X	PART NO. PA-001	REV. A
-----------	--------------------	-----------

REF: \_\_\_\_\_ SCALE: NTS SHEET 1 OF 1