

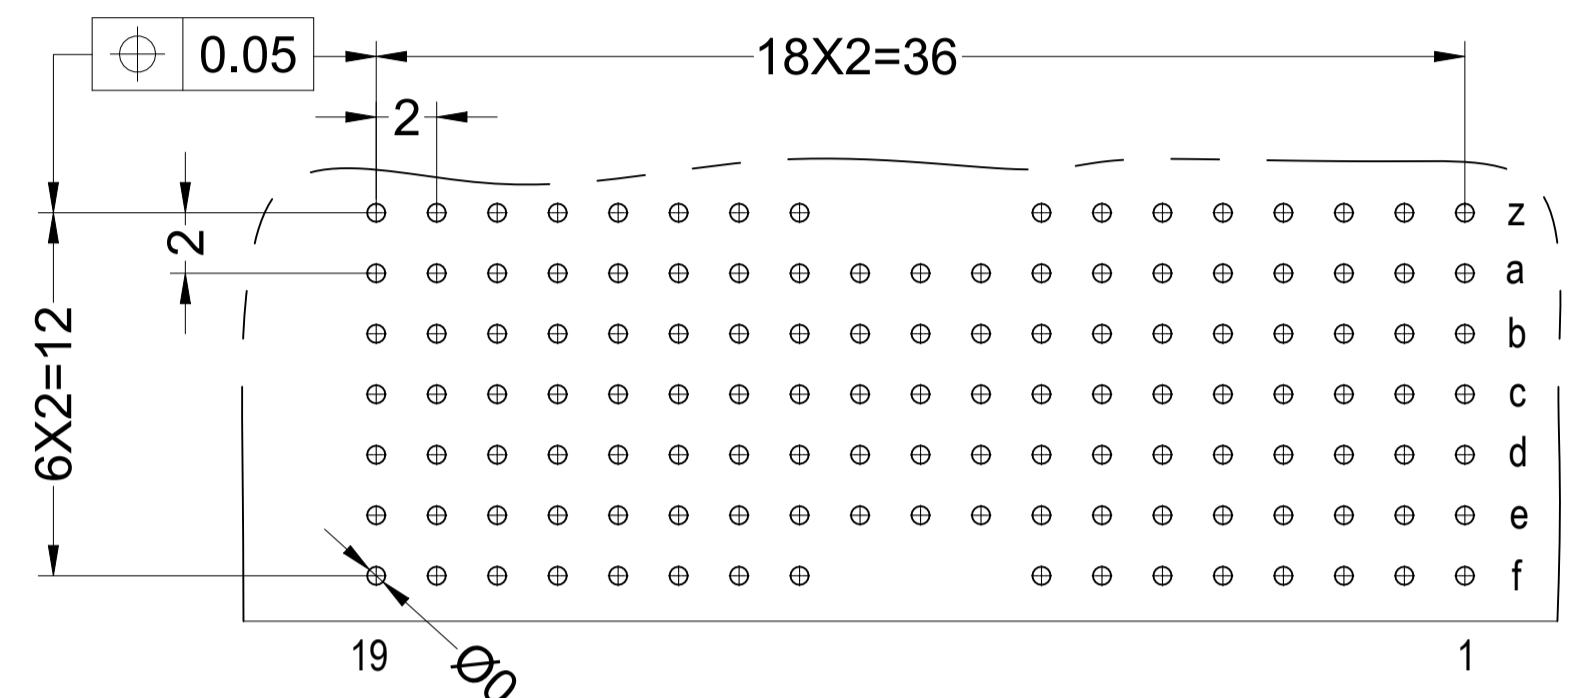
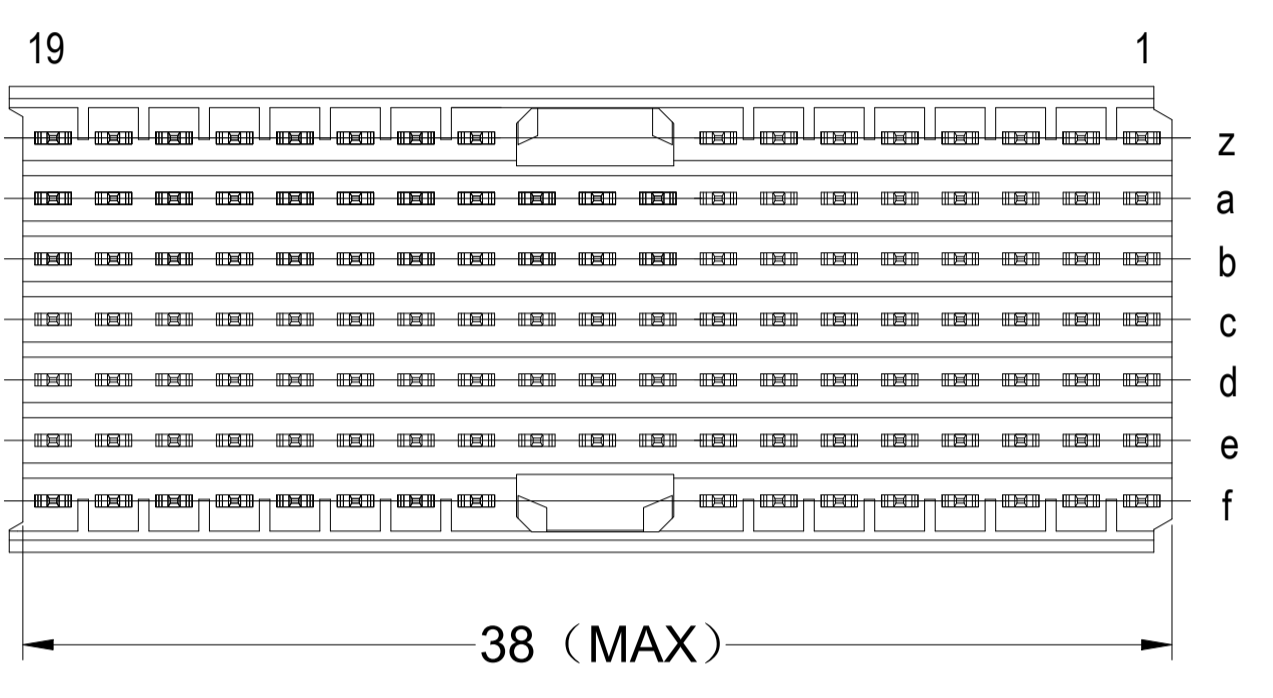
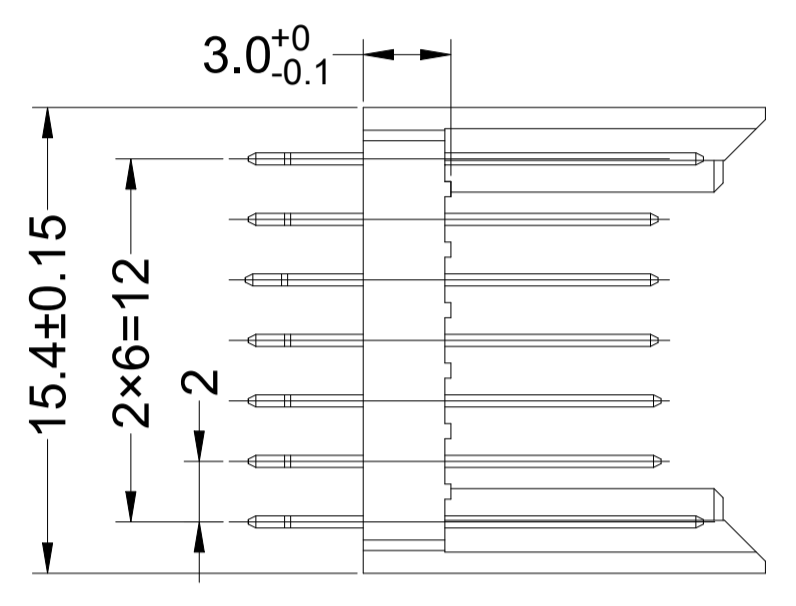
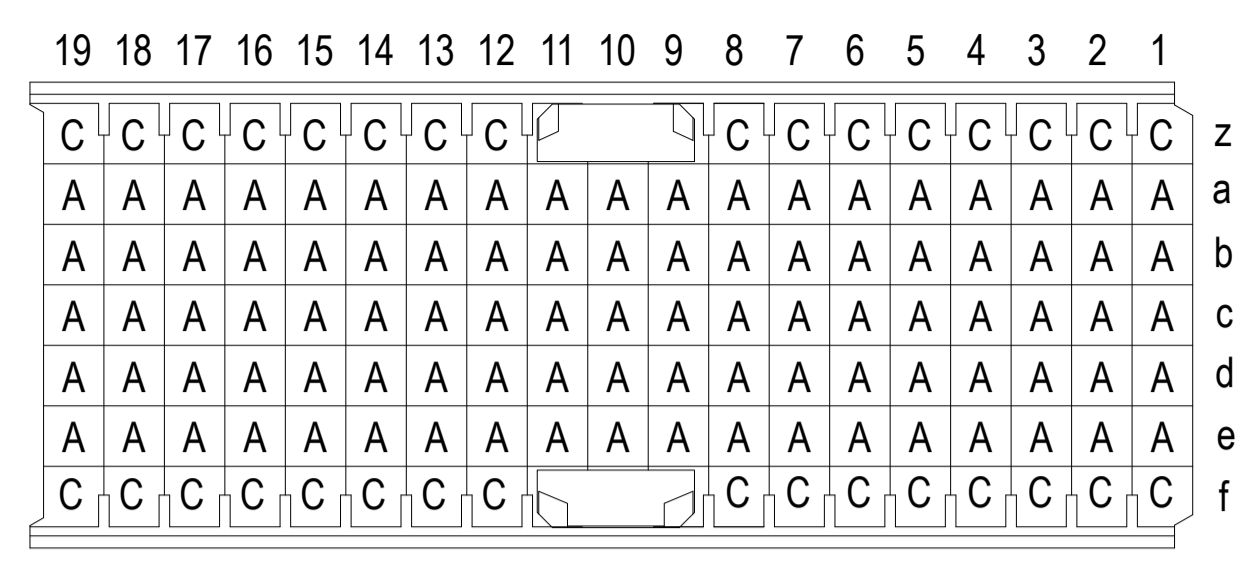
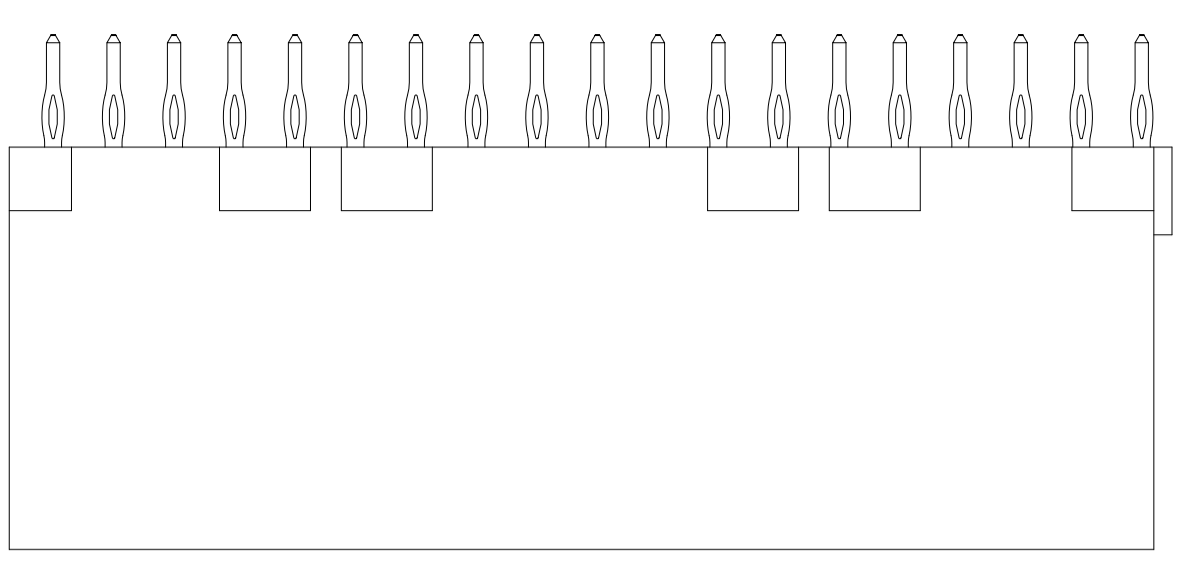


REVISIONS				
REV	DESCRIPTION	DATE	BY	APP'D
A	INITIAL DRAWING	18OCT2021	TL	HL

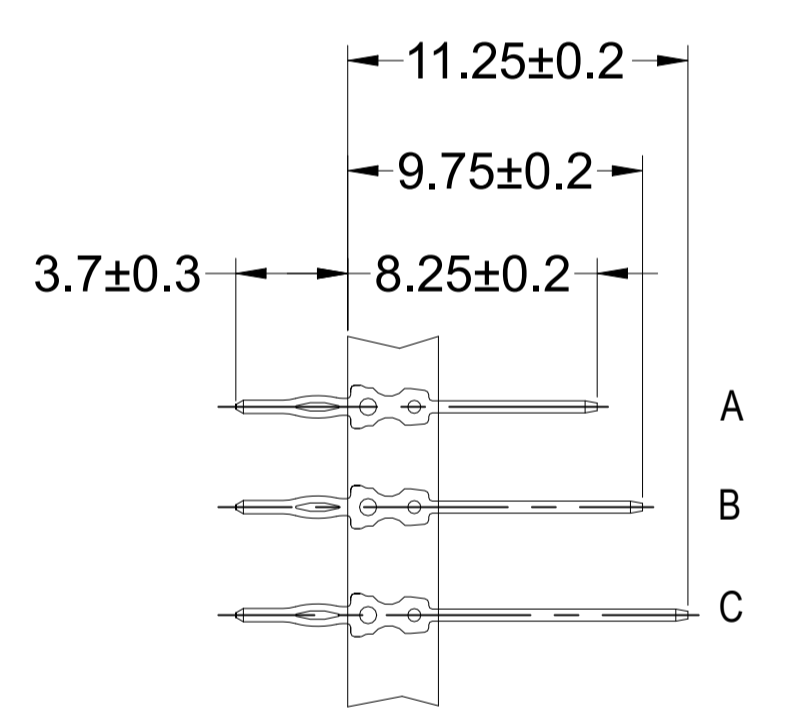

RECOMMEND PCB-HOLE LAYOUT  
COMPONENT SIDE SHOWN  
TOLERANCE ±0.05

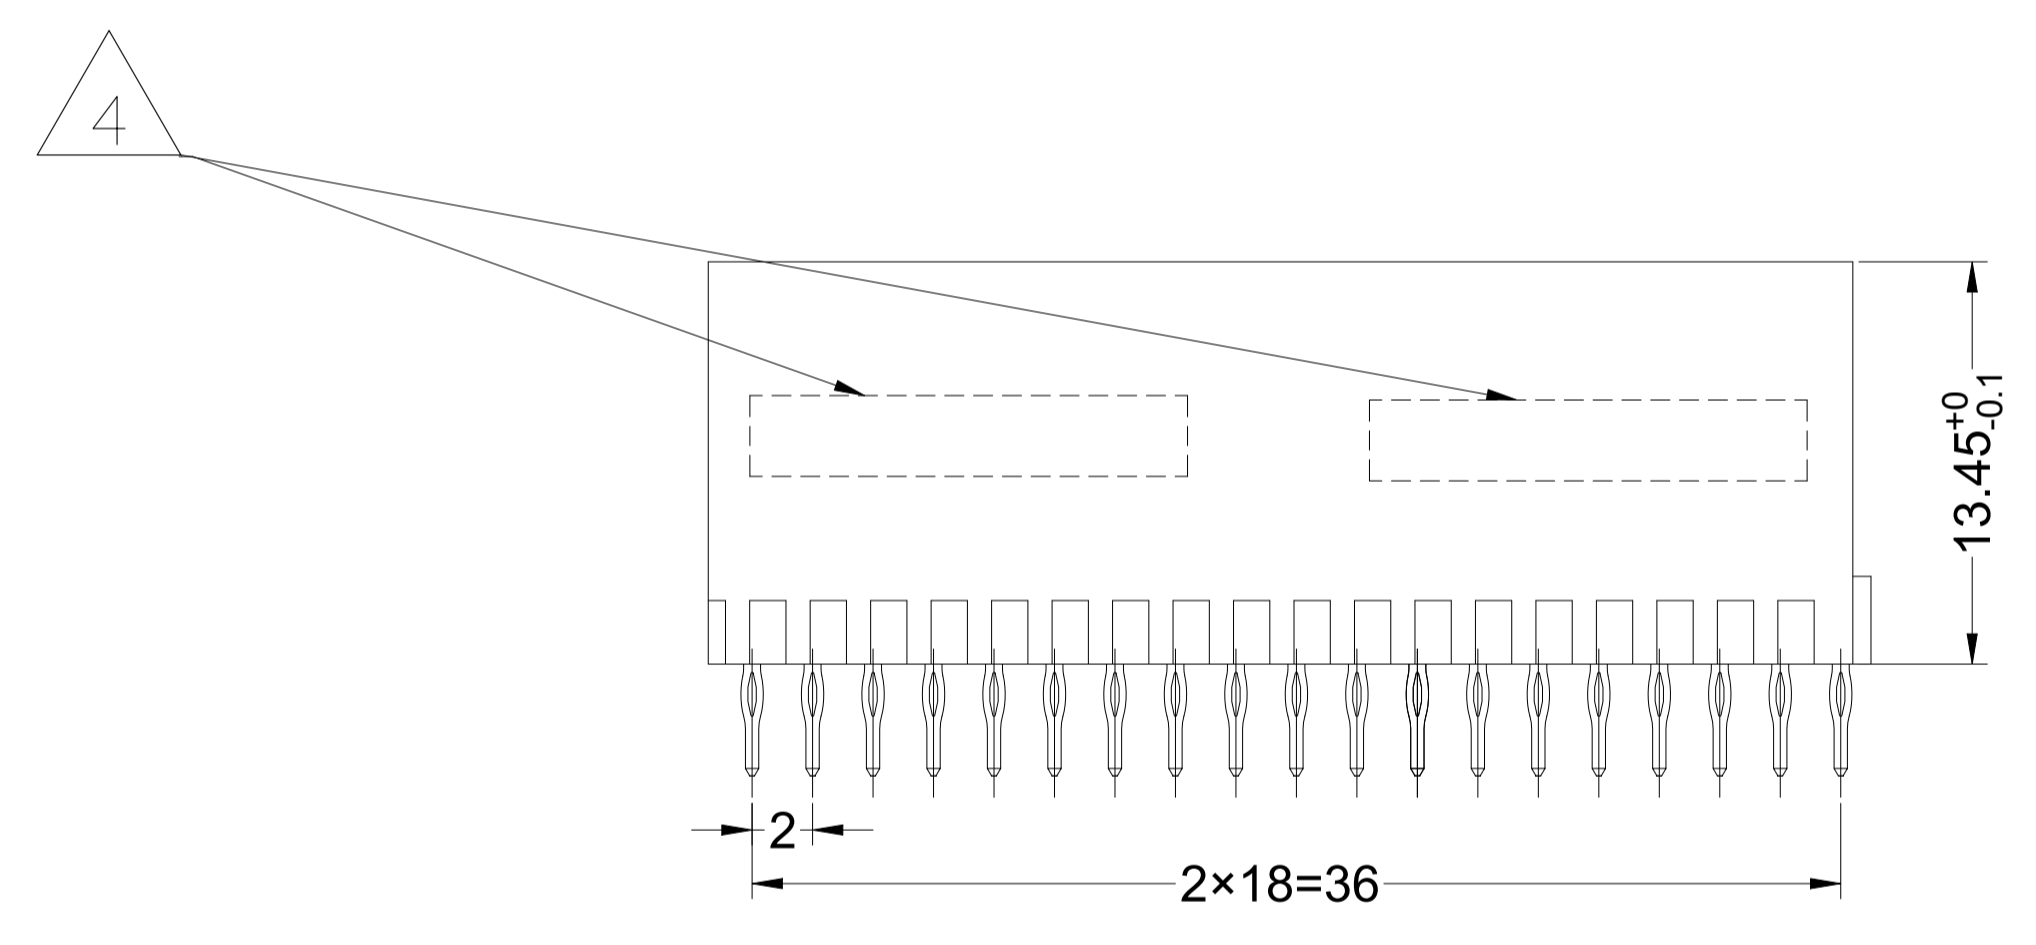

- 1 MATERIAL:  
CONTACT: COPPER ALLOY.  
HOUSING: GLASS-FILLED POLYESTER.
- 2 GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION PIN: 0.5µm MIN TIN.  
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- 3 CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101 PERFORMANCE LEVEL 2.
- 4 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.

2/3	2392196-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN TONY LI 27MAY2021		NAME MALE ASSEMBLY, Z-PACK 2mm HM, 127P TYPE A/B EON	
DIMENSIONS: mm		CHK ALEX XU 27MAY2021		APPROVED HOPE LU 27MAY2021	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-19082		APPLICATION SPEC 114-160149	
0-PLC ±		SIZE A1		SCALE 4:1	
1-PLC ±0.2		WEIGHT 0		SHEET 1 of 1	
2-PLC ±		CUSTOMER DRAWING		REV A	
3-PLC ±		DRAWING NO. 00779C=2392196			
4-PLC ±					
ANGLES ±					
FINISH SEE TABLE					