


**NOTES:**

1. RESISTANCE @ 25°C : 50KΩ ± 1%
2. BETA VALUE (0/50°C) : 4035K ± 1%
3. OPERATING TEMPERATURE RANGE : -40°C TO +250°C.
4. THERMAL TIME CONSTANT : 15SEC IN WATER
5. VOLTAGE BREAKDOWN STRENGTH : 1500V AC FOR 3SEC.
6. INSULATION RESISTANCE : A MINIMUM OF 100MΩ @ 500VOLTS DC.
7. DISSIPATION FACTOR : 1mW/°C.
8. LASER MARKING "MOLEX-DATE CODE(MM/YY)" & "XXK(R25-value) XXXX(B-value)"

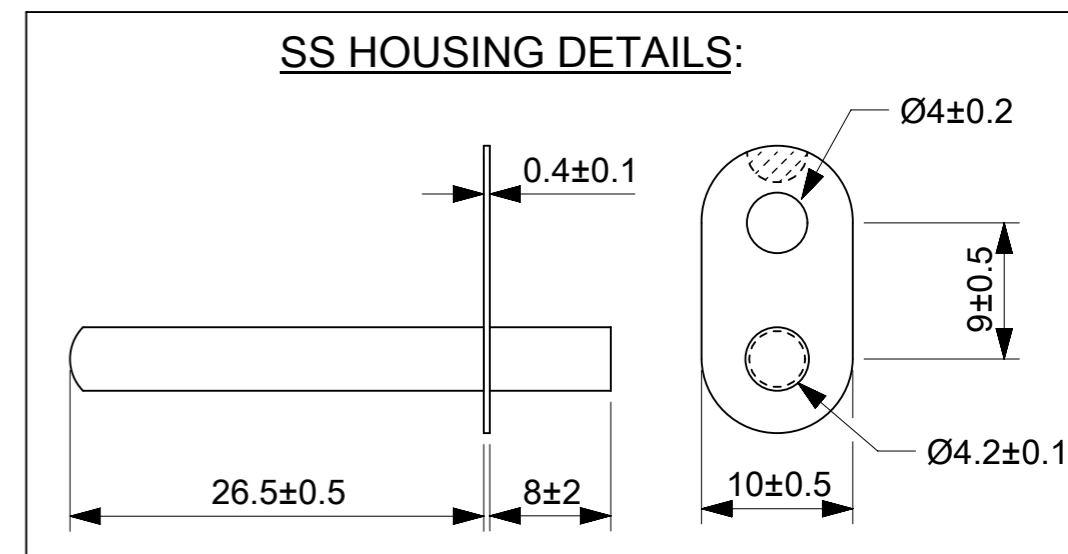

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	DIMENSION UNITS	SCALE	CURRENT REV DESC:
$\nabla_A = 0$	mm	NTS	<b>molex</b> GLASS NTC MOUNTING -50K±1%,B4035,L100 PRODUCT CUSTOMER DRAWING
$\nabla_E = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)		
$\nabla_F = 0$	ANGULAR TOL ± °		
DIVISIONAL SYMBOLS	4 PLACES	±	
	3 PLACES	±	
	2 PLACES	±	EC NO: 733229
	1 PLACE	±	DRWN: NANDAK 2022/12/23
	0 PLACES	±	CHK'D: RBBHASKAR 2022/12/23
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPR: RBBHASKAR 2022/12/23
	THIRD ANGLE PROJECTION	DRAWING	INITIAL REVISION:
		A3-SIZE	DRWN: RAVIKM 2022/01/30
		SERIES	APPR: RBBHASKAR 2022/02/10
		MATERIAL NUMBER	DOCUMENT NUMBER
		218537	2185373917
		CUSTOMER	DOC TYPE
		GENERAL MARKET	PSD
		SHEET NUMBER	DOC PART
		1 OF 2	000
			REVISION
			B4

RESISTANCE VS TEMPERATURE CHARACTERISTICS

TEMP(°C)	Rmin(KΩ)	Rnom(KΩ)	Rmax(KΩ)
-40	1689.446	1768.460	1850.985
-35	1206.272	1258.400	1312.649
-30	887.056	922.520	959.306
-25	664.871	689.441	714.849
-20	497.166	514.028	531.408
-15	374.123	385.702	397.600
-10	281.815	289.707	297.790
-5	214.745	220.154	225.676
0	164.268	167.950	171.697
5	126.975	129.484	132.029
10	98.953	100.654	102.374
15	77.932	79.081	80.239
20	61.896	62.663	63.432
25	49.500	50.000	50.500
30	39.644	40.133	40.623
35	31.919	32.382	32.848
40	25.824	26.254	26.688
45	20.991	21.384	21.782
50	16.731	17.082	17.439
55	14.063	14.383	14.709
60	11.593	11.880	12.172
65	9.605	9.861	10.123
70	8.000	8.228	8.462
75	6.700	6.903	7.112
80	5.643	5.824	6.010
85	4.782	4.943	5.109
90	4.088	4.232	4.382
95	3.509	3.638	3.772
100	3.022	3.138	3.258
105	2.609	2.713	2.821
110	2.258	2.351	2.448
115	1.957	2.041	2.129
120	1.699	1.775	1.853
125	1.478	1.545	1.616
130	1.287	1.347	1.411
135	1.122	1.177	1.234
140	0.980	1.029	1.081
145	0.858	0.902	0.948
150	0.752	0.792	0.834

TEMP(°C)	Rmin(KΩ)	Rnom(KΩ)	Rnom(KΩ)
155	0.6592	0.695	0.7325
160	0.5856	0.618	0.6523
165	0.5222	0.552	0.583
170	0.4671	0.494	0.5226
175	0.4189	0.444	0.4697
180	0.3765	0.399	0.423
185	0.3391	0.36	0.3818
190	0.3059	0.325	0.3452
195	0.2765	0.294	0.3126
200	0.2503	0.266	0.2835
205	0.227	0.242	0.2576
210	0.2061	0.22	0.2344
215	0.1875	0.2	0.2136
220	0.1707	0.182	0.1949
225	0.1558	0.167	0.1781
230	0.1425	0.153	0.1632
235	0.1306	0.14	0.1499
240	0.1198	0.129	0.1378
245	0.1103	0.118	0.127
250	0.1018	0.109	0.1174

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	DIMENSION UNITS	SCALE	CURRENT REV DESC:
$\nabla_A = 0$	mm	NTS	<p><b>molex</b></p> <p>GLASS NTC MOUNTING -50K±1%,B4035,L100</p> <p>PRODUCT CUSTOMER DRAWING</p>
$\nabla_E = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)		
$\nabla_F = 0$	ANGULAR TOL ± °		
DIVISIONAL SYMBOLS	4 PLACES ±	EC NO: 733229	
	3 PLACES ±	DRWN: NANDAK 2022/12/23	
	2 PLACES ±	CHK'D: RBBHASKAR 2022/12/23	
	1 PLACE ±	APPR: RBBHASKAR 2022/12/23	
	0 PLACES ±	INITIAL REVISION:	
		DRWN: RAVIKM 2022/01/30	
		APPR: RBBHASKAR 2022/02/10	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION	DOCUMENT NUMBER
		DRAWING	2185373917
		SERIES	PSD
		MATERIAL NUMBER	000
		CUSTOMER	B4
		SHEET NUMBER	2 OF 2