

## Power distributor - VS-PPC-J-4X-1227 - 1405387

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

Power H distributor, 4 x MSTB contact inserts, metal housing, without mounting screws




Power H distributor

### Product description

Power H distributor



### Key commercial data

Packing unit	1 PCE
GTIN	 4 046356 419918
Custom tariff number	85444290
Country of origin	GERMANY

### Technical data

#### Mechanical characteristics

Number of positions	5
Number of slots	4
Ambient temperature (operation)	-40 °C ... 70 °C

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 70 °C
Degree of protection	IP65/67

#### Material data

Housing material	Zinc die-cast
------------------	---------------

#### Electrical characteristics

Rated voltage (III/3)	24 V
-----------------------	------

## Power distributor - VS-PPC-J-4X-1227 - 1405387

### Technical data

#### Electrical characteristics

Rated current	16 A
---------------	------

### Classifications

#### eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260708
eCl@ss 7.0	27440312
eCl@ss 8.0	27440312

#### ETIM

ETIM 3.0	EC000374
ETIM 4.0	EC000374
ETIM 5.0	EC000374

#### UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

### Accessories

#### Additional products

Assembly adapters - VS-PPC-J-M - 1405390




Mounting foot for the power H distributors, plastic

### Drawings

# Power distributor - VS-PPC-J-4X-1227 - 1405387

Dimensioned drawing

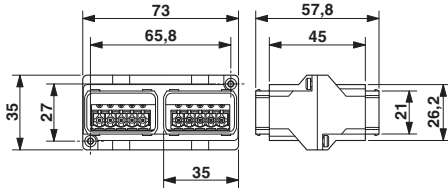

Circuit diagram

