

### Is Now Part of



## ON Semiconductor®

## To learn more about ON Semiconductor, please visit our website at <a href="https://www.onsemi.com">www.onsemi.com</a>

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to Fairchild <a href="guestions@onsemi.com">guestions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer



January 2009


# 2SC5242/FJA4313 NPN Epitaxial Silicon Transistor

### **Applications**

- · High-Fidelity Audio Output Amplifier
- · General Purpose Power Amplifier

### **Features**

- High Current Capability: I<sub>C</sub> = 17A
- High Power Dissipation: 130watts
- · High Frequency: 30MHz.
- High Voltage: V<sub>CEO</sub>=250V
- · Wide S.O.A for reliable operation.
- Excellent Gain Linearity for low THD.
- · Complement to 2SA1962/FJA4213.
- Thermal and electrical Spice models are available
- · Same transistor is also available in:
  - --TO264 package, 2SC5200/FJL4315: 150 watts
  - --TO220 package, FJP5200: 80 watts
  - --TO220F package, FJPF5200: 50 watts



### Absolute Maximum Ratings\* T<sub>a</sub> = 25°C unless otherwise noted

Symbol	Parameter	Ratings	Units	
BV <sub>CBO</sub>	Collector-Base Voltage	250	V	
BV <sub>CEO</sub>	Collector-Emitter Voltage	250	V	
BV <sub>EBO</sub>	Emitter-Base Voltage	5	V	
I <sub>C</sub>	Collector Current(DC)	17	Α	
I <sub>B</sub>	Base Current		Α	
P <sub>D</sub> Total Device Dissipation(T <sub>C</sub> =25°C) Derate above 25°C		130 1.04	W W/°C	
T <sub>J</sub> , T <sub>STG</sub>	Junction and Storage Temperature	- 50 ~ +150	°C	

<sup>\*</sup> These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

### Thermal Characteristics\* Ta=25°C unless otherwise noted

Symbol	Parameter	Max.	Units
$R_{ heta JC}$	Thermal Resistance, Junction to Case	0.96	°C/W

<sup>\*</sup> Device mounted on minimum pad size

### **h**<sub>FE</sub> Classification

Classification	R	0
h <sub>FE1</sub>	55 ~ 110	80 ~ 160

### $\textbf{Electrical Characteristics*} \ \, \textbf{T}_{a} = 25^{\circ} \textbf{C} \ \, \textbf{unless otherwise noted}$

Symbol	Parameter	Test Condition	Min.	Тур.	Max.	Units
BV <sub>CBO</sub>	Collector-Base Breakdown Voltage	I <sub>C</sub> =5mA, I <sub>E</sub> =0	250			V
BV <sub>CEO</sub>	Collector-Emitter Breakdown Voltage	$I_C=10mA$ , $R_{BE}=\infty$	250			<b>V</b>
BV <sub>EBO</sub>	Emitter-Base Breakdown Voltage	I <sub>E</sub> =5mA, I <sub>C</sub> =0	5			V
I <sub>CBO</sub>	Collector Cut-off Current	V <sub>CB</sub> =230V, I <sub>E</sub> =0			5.0	μА
I <sub>EBO</sub>	Emitter Cut-off Current	$V_{EB}$ =5V, $I_{C}$ =0			5.0	μА
h <sub>FE1</sub>	DC Current Gain	V <sub>CE</sub> =5V, I <sub>C</sub> =1A	55		160	
h <sub>FE2</sub>	DC Current Gain	V <sub>CE</sub> =5V, I <sub>C</sub> =7A	35	60		
V <sub>CE</sub> (sat)	Collector-Emitter Saturation Voltage	I <sub>C</sub> =8A, I <sub>B</sub> =0.8A		0.4	3.0	<b>V</b>
V <sub>BE</sub> (on)	Base-Emitter On Voltage	V <sub>CE</sub> =5V, I <sub>C</sub> =7A		1.0	1.5	٧
f <sub>T</sub>	Current Gain Bandwidth Product	V <sub>CE</sub> =5V, I <sub>C</sub> =1A		30		MHz
C <sub>ob</sub>	Output Capacitance	V <sub>CB</sub> =10V, f=1MHz		200		pF

<sup>\*</sup> Pulse Test: Pulse Width=20 $\mu$ s, Duty Cycle≤2%

### **Ordering Information**

Part Number	Marking	Package	Packing Method	Remarks
2SC5242RTU	C5242R	TO-3P	TUBE	hFE1 R grade
2SC5242OTU	C5242O	TO-3P	TUBE	hFE1 O grade
FJA4313RTU	J4313R	TO-3P	TUBE	hFE1 R grade
FJA4313OTU	J4313O	TO-3P	TUBE	hFE1 O grade

### **Typical Characteristics**

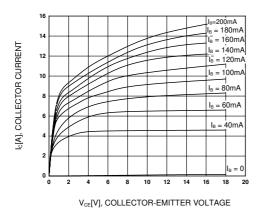


Figure 1. Static Characteristic

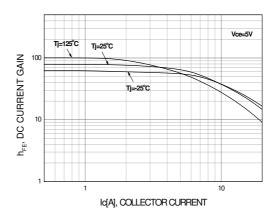


Figure 2. DC current Gain ( R grade )

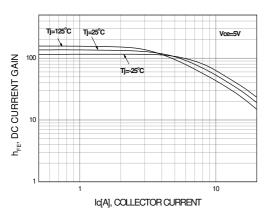


Figure 3. DC current Gain ( O grade )

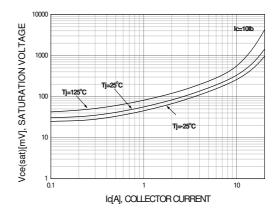


Figure 4. Collector-Emitter Saturation Voltage

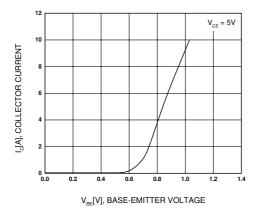


Figure 5. Base-Emitter On Voltage

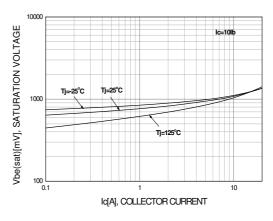


Figure 6. Base-Emitter Saturation Voltage

### **Typical Characteristics**

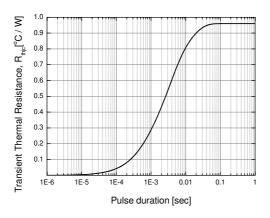


Figure 7. Thermal Resistance

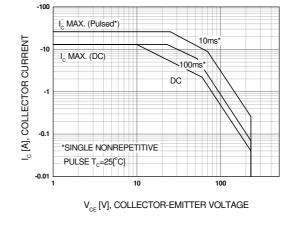


Figure 8. Safe Operating Area



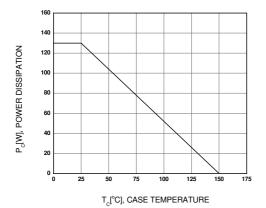


Figure 9. Power Derating

### **Package Dimensions**

### TO-3P

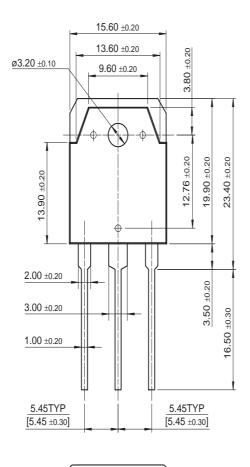

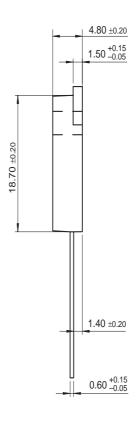



Dimensions in Millimeters





#### TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

Build it Now™ Core PLUS™ Core POWER™ CROSSVOLT™ CTL™

Current Transfer Logic™ EcoSPARK' EfficentMa×™

EZSWITCH™\*

Fairchild®

Fairchild Semiconductor® FACT Quiet Series™ FACT

FAST® FastvCore™ FlashWriter®\* F-PFSTM FRFFT®

Global Power Resource Green FPS™

Green FPS™ e-Series™ GTO\*\* IntelliMAX™

ISOPLANAR™ MegaBuck™ MIČROCOUPLER" MicroFET\*\* MicroPak™

MillerDrive™ MotionMax™ Motion-SPM™ OPTOLOGIC® OPTOPLANAR® PDP SPM™ Power-SPM™ PowerTrench®

Programmable Active Droop™

QFÊT QSTM Quiet Series™ RapidConfigure™

Saving our world, 1mW at a time™

SmartMax™ SMART START™ SPM<sup>®</sup> STEALTH™ SuperFET™

SuperSOT\*\*3 SuperSOT\*\*-6 SuperSOT™8 SupreMOS™ SyncFET™ SYSTEM ®

The Power Franchise®

Wer franchise

TinyBoost™ TinyBuck™ TinyLogic<sup>®</sup> TINYOPTO\*\* TinyPower™ TinyPWM™ TinyWire™ µSerDes™

LIHC Ultra FRFET™ UniFET™ **VCXTM** VisualMax™

\* EZSWITCH™ and FlashWriter® are trademarks of System General Corporation, used under license by Fairchild Semiconductor.

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN, NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN. WHICH COVERS THESE PRODUCTS

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

- 1. Life support devices or systems are devices or systems which, (a) are 2. A critical component in any component of a life support, device, or intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
  - system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

#### PRODUCT STATUS DEFINITIONS

#### Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed Full Production Datasheet contains final specifications. Fairchild Semiconductor reserves the right to rat any time without notice to improve the design.		Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

Rev. 135

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hol

### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81–3–5817–1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative