

CUSTOMER P/N	FCI P/N	L/mm	L1/mm
08-0204-01-01	10125715-P0013YYLF	127±4	20REF


A

B

C

D

P2

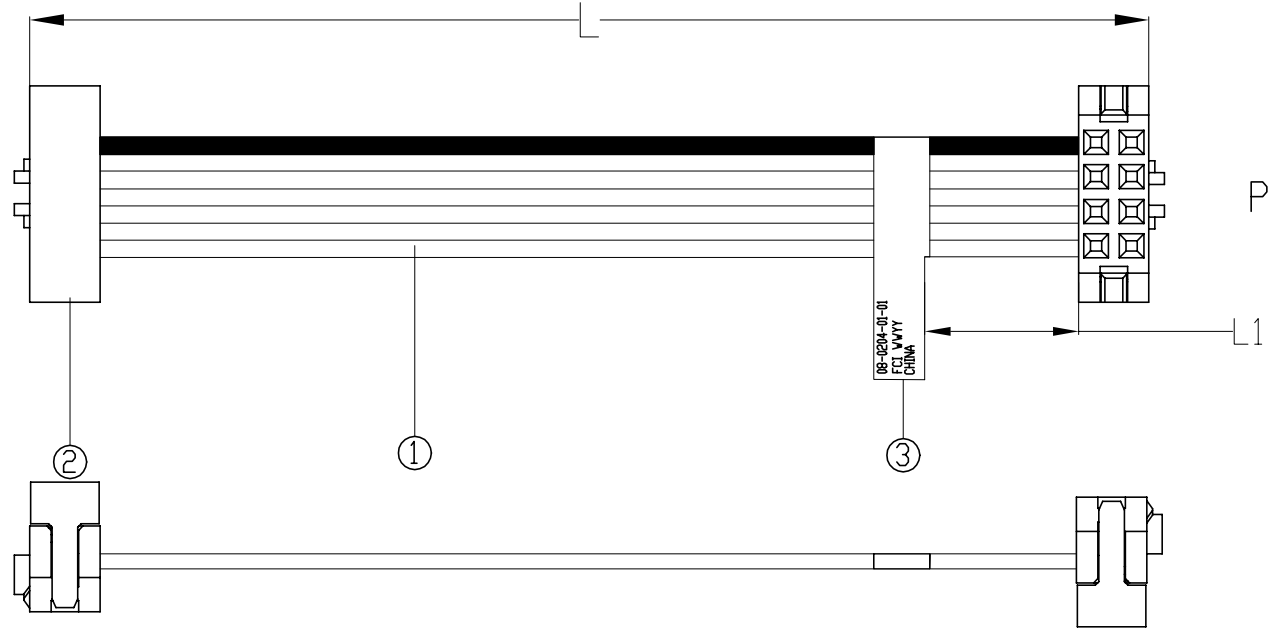


NOTES:

1. TEST:

□/S:100% TEST.
 CONNECTION RESISTANCE: 2 Ωhm MAX.
 HI-PDT:300V/10mS.
 INSULATION RESISTANCE: 10M Ωhm MIN.

2. PART NUMBER SCHEME FOR CABLE ASSEMBLY:

10125715 -P XXXX Y Y LF

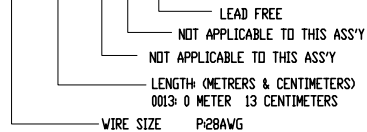

3. ROHS COMPLIANCE

4. LABEL CONTENT:

08-0204-01-01-----CUSTOMER P/N
 FCI WYYY-----DATE CODE (WEEK & YEAR)
 CHINA

08-0204-01-01
 FCI WYYY
 CHINA

Fold Perforation

No.	DESCRIPTION	QTY	UNIT
③	Cable	1	EA
②	Minitex 2x4 position IDC receptacle, 0.2um gold, with central key and friction latch bump	2	PC
①	Flat cable UL21682, 28AWG*8C, Pitch1.0, Halogen Free Polyolefin 3M P/NHF625/08	A/R	M

www.fciconnect.com		surface - ✓	tolerance std -	projection -	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	Harry Shi	2013-07-03	ANGULAR	0.X ±-	size A3
Eng	Harry Shi	2013-07-03	LINEAR	0.XX ±-	Scale n/a
Chr	Harry Shi	2013-07-03	0° ±-	0.XXX ±-	ECN
Appr	Jackson Wang	2013-07-03	Product family	Spec ref	-
FCI		title Minitex IDC Cable Ass'y		dwg no 10125715	Rev. A
catalog no		-		CUSTOMER	sheet 1 of 1

rev	ecn no	dr	date
A	-	SHH	2013-07-03
G	-	-	-

A

B

C

D

