




✓ RoHS Compliant

DIMENSIONS

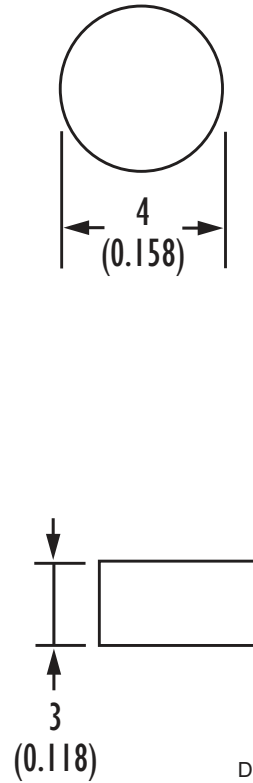

Drawings not to scale
 All dimensions in mm nominal

SPECIFICATION

Gauss strength at surface	3200
Magnet Material	Neodymium Iron Boron
Operating Temperature	140°C Max.
Plating	Bright Nickel
Grade	N35H

Applications Include

- Position and limit sensing.
- Linear actuators.
- Security system switch.
- Door Switch.

Options

- Other sizes available
- Neodymium and Alcomax versions.
- Housed and threaded magnets available
- If you do not see what you need, just ask, as there is a strong possibility we can do it !

Did you know we also sell?



Rev. No.	Revision Note	Date	Signature
2	Datasheet revision	21-01-13	ML



As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone : +44 (0)1255 862236 www.comuseurope.co.uk Fax: +44 (0)1255 862014

©2013 Copyright Comus Europe Ltd, Unit 7, Rice Bridge Industrial Estate, Thorpe - Le - Soken, Essex, CO16 0HL, ENGLAND.
 USA: Comus International: +1 973 777 6900, Belgium: Comus Belgium BVBA: +32 (0)12 390400