


Diode Plug



DLS 2
for SAKR-D

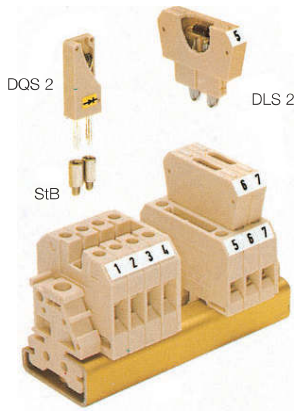

SAKR-D



DLS 2
for SAKR-D




SAKR-D




WSD 2.5



WTR 2.5 D
with diode plug
with test sockets



WTR 2.5 D



Dimensions	
Terminal width (+ assembly tolerance 0.2)	mm (in.)
Insulation stripping length	mm (in.)
Connection data	
Screw connection, solid	
Screw connection, flexible	
Conductor cross-section	
VDE rated data	
Diode current	
Diode reverse voltage	
Cross-section	

Ordering data	
DLS 2 = Diode plug for lateral disconnection	
DQS 2 = Diode plug for cross-connection	

Type	Part No.
DLS 2 without components	0321060000
DLS 2 with wire link	0547660000
DLS 2 with diode 1 N 4007	0630160000
DLS 2 with diode 1 N 4007	0547760000
SAKR-D, TS 32 with DLS 2	0263660000
SAKR-D, TS 32 with DLS 2 without components	0413060000
SAKR-D, TS 32 with test sockets and DLS 2 without components	0413160000
SAKR-D, TS 32 Special design with test socket and 2 antiparallel diodes 1 N 4007, without DLS 2	0606560000
SAKR-D, TS 32 with test sockets	0412960000
SAKR-D, TS 32 with test sockets	0546460000

Type	Part No.
DLS 2 without components	0321060000
DLS 2 with wire link	0547660000
DLS 2 with diode 1 N 4007	0630160000
DLS 2 with diode 1 N 4007	0547760000
SAKR-D, TS 35 with DLS 2	0299560000
SAKR-D, TS 35 with DLS 2 without components	0185760000
SAKR-D, TS 35 with test sockets and DLS 2 without components	1175360000
SAKR-D, TS 35 Special design with test socket and 2 antiparallel diodes 1 N 4007, without DLS 2	1175460000
SAKR-D, TS 35 with test sockets	0299960000

Type	Part No.
WSD 2.5 without components	1058760000
WSD 2.5 with wire link	1058660000
WSD 2.5 with diode 1 N 4007	1058560000
WSD 2.5 with diode 1 N 4007	1058460000
WTR 2.5 D with WSD 2.5	1013500000
WTR 2.5 D with WSD 2.5 105856	1013600000
WTR 2.5 D with WSD 2.5 105846	1013700000
WTR 2.5 D with WSD 2.5 105866	1013200000
WTR 2.5 D with test sockets and WSD 2.5 105856	1013300000
WTR 2.5 D with test sockets and WSD 2.5 105846	1013400000
WTR 2.5 D with test sockets and WSD 2.5 105866	

Type	Part No.
WTR 2.5 D with diode 1 N 4007	8017050000
WTR 2.5 D with diode 1 N 4007	8016820000
WTR 2.5 D with diode 1 N 4007 on request	
WTR 2.5 D with 2 antiparallel diodes 1 N 4007	1014600000
WTR 2.5 D with test sockets and Diode 1 N 4007	1014700000
WTR 2.5 D with test sockets and Diode 1 N 4007	1014800000
WTR 2.5 D with test sockets and 2 antiparallel diodes 1 N 4007	

Maximum values for built-in components: Length 23 mm (.91 in.), diameter 3.5 mm (.18 in.), output 0.5 Watt, limit temperature 100°C