

**Ratings**

Voltage: 600 V  
 Temperature: -40~105 °C  
 Flammability: FT2

**Conductor**

Conductor count: 9  
 Gauge: 26 AWG 0.13 mm<sup>2</sup>  
 Material: tinned copper strands  
 Strand size:  $\phi$ 0.08 x 26  
 Resistance at 20 °C: 150  $\Omega$  /km max

**Insulator**

Material: mPPE  
 Color: red, black, white, yellow, blue, green, orange, purple, gray  
 Diameter:  $\phi$ 1  $\pm$ 0.10 mm  
 Average thickness: 0.25 mm  
 Resistance at 20 °C: 100 M $\Omega$  /km min

**Filler**

Material: cotton rope

**Wrap**

Material: cotton paper



**Outer jacket**

Material: mPPE, 85A  
 Color: black  
 Diameter:  $\phi$ 5.3  $\pm$ 0.20 mm  
 Average thickness: 0.79 mm

**Wire marking:** E339579 UL AWM STYLE 21509 26 AWG 105°C  
 600V - - - cUL AWM I A 105°C 600V FT2 TENSILITY

**Bend radius**

Minimum: 6 times diameter (31.8 mm)

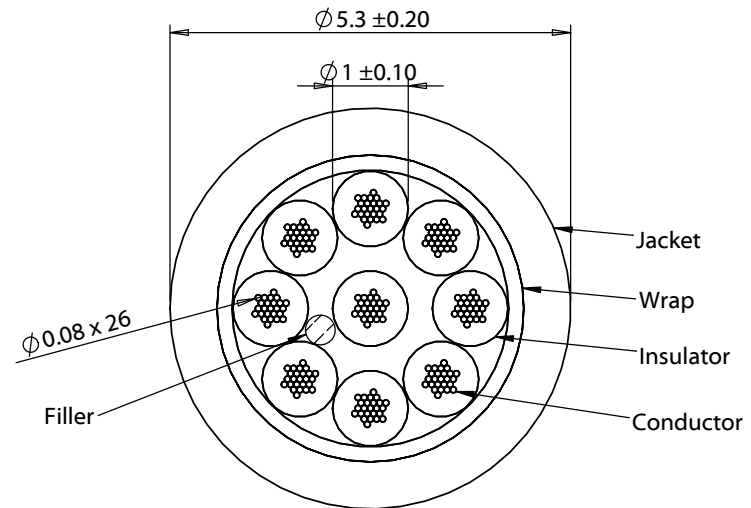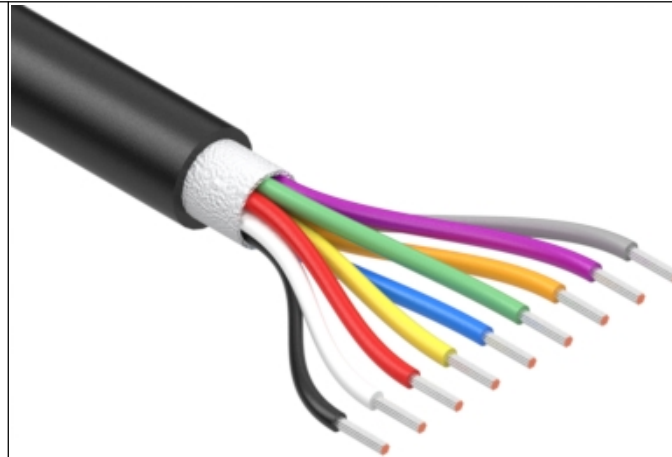

Revision:	Date:	Description:
A	5/4/2021	Initial release

Prepared:  
**AW**  
Digitally signed by AW  
 Date: 2021.05.12  
 11:41:06 -07'00'

Verified:  
**JC**  
Digitally signed by JC  
 Date: 2021.05.12  
 14:35:07 -07'00'

Dimensions are in millimeters.  
 Tolerances:  
 X:  $\pm$  0.5 mm  
 X.X:  $\pm$  0.3 mm  
 X.XX:  $\pm$  0.05 mm

Notes:  
 RoHS compliant  
 Phthalate and halogen free

Description:  
 Wire, 9C TS, 26 AWG, 21509, 600V, 105C, 5.3 mm, FT2, mPPE

**TENSILITY**

tel 1.541.323.3228 800 877.670.7118  
 fax 1.541.323.4202 web tensility.com

Size:	Part number:
A	30-02034
Scale: 10:1	
Sheet 1 of 1	