

# TC EXTENDER 2001 ETH-2S

 [perle.com/products/ethernet-extenders/tc-extender-2001-eth-2s.shtml](http://perle.com/products/ethernet-extenders/tc-extender-2001-eth-2s.shtml)

## Long Range Ethernet Extender

- Transmit Ethernet data up to 20km
- Automatic SHDSL data rate detection
- Network transparent (no IP configuration required)
- Protocol transparent

The TC EXTENDER transparently extends **Ethernet data transmission up to 20 km** across single twisted pair ( CAT5/6/7 ), coax or any existing copper wiring previously used in alarm circuits, E1/T1 circuits, RS-232, RS-422, RS-485, CCTV and CATV applications.



## Long Distance Ethernet Transmission over Copper

**SHDSL is the technology** of choice for the transmission of digital **data over long distance copper wires** of a network. Although performance depends on the characteristics of the cable used, the reach of SHDSL is much further than any other DSL technology currently available. In addition, upload and download bandwidth is symmetrical boasting data rates as high as **15.3 Mbps over 2-wire copper** and **30 Mbps over 4-wire copper**.

The TC EXTENDER is **protocol transparent**. With two SHDSL ports you can easily set up **point-to-point, linear or ring network structures** with ranges of up to 20 km. These simple and effective Ethernet Extenders are perfect for industrial environments, commercial buildings, residential units, hospitality environments, connecting a remote office or private-network backbone to a corporate LAN ... anywhere you need Ethernet communication links between separated LANs or LAN devices (i.e. PCs, digital sensors, VoIP phones, WiFi APs, IP cameras and more).

Two software configurable digital outputs are available for external device alarm generation.

For “**plug and play**” long distance Ethernet data transmission, the TC EXTENDER 2001 ETH-2S is the ideal solution.

## Long Distance Ethernet Extender Features

- Robust modulation method (SHDSL)
- Future proof (IPv4 and IPv6-compatible)
- Automatic detection of network cable type (auto MDI(X))
- Automatic network data rate detection (10/100 Mbps)
- Easy startup, plug and play
- Two alarm and signal outputs



Ethernet



## TC EXTENDER 2001 ETH-2S Technical Specifications

### Serial interface

|                                       |  |
|---------------------------------------|--|
| <b>Interface 1</b>                    | Ethernet interface, 10/100Base-T(X) in acc. with IEEE 802.3u |
| Interface                             | Ethernet   |
| Connection method                     | RJ45 socket, shielded  |
|                                       | 1 port 10/100Base-T(X), auto negotiation                     |
| Transmission length                   | < 100 m (shielded twisted pair)                              |
| Protocols supported                   | Protocol-transparent for TCP/IP, IPv4, and IPv6              |
| Serial transmission speed             | 10/100 Mbps, auto negotiation                                |
| <b>Interface 2</b>                    | SHDSL interface according to ITU-T G.991.2.bis               |
| No. of channels                       | 2 (2-wire operation)   |
| Connection method                     | 2 x 2-pos. COMBICON plug-in screw terminal blocks            |
| Transmission length                   | < 20 km (Depending on data rate and cable cross section)     |
| Conductor cross section solid min.    | 0.2 mm <sup>2</sup>  |
| Conductor cross section solid max.    | 2.5 mm <sup>2</sup>  |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup>  |
| Conductor cross section flexible max. | 2.5 mm <sup>2</sup>  |
| Conductor cross section AWG min.      | 24   |
| Conductor cross section AWG max.      | 14   |
| Serial transmission                   | 4-wire operation: 64 kbps ... 30 Mbps                        |

|   |  |
|---|--|
| speed                                   | 2-wire operation: 32 kbps ... 15.3 Mbps  |
| <b>Interface 3</b>                      | USB 2.0  |
| Connection method                       | Mini-USB type B, 5-pos.  |
| Transmission length                     | < 5 m (only for configuration and diagnostics)   |
| <b>Digital outputs</b>                  |  |
| Output name                             | Digital output   |
| Number of outputs                       | 2  |
| Voltage output signal                   | depending on the operating voltage   |
| Current output signal                   | ≤ 150 mA (Short-circuit-proof)   |
| Connection method                       | 2 x 2-pos. COMBICON plug-in screw terminal blocks  |
| Behavior of the outputs                 | Deactivated for device supply via DIN rail connector   |
| <b>Function</b>                         |  |
| Management                              | Plug and Play, diagnostics via PSI-CONF software or web-based management (only with managed Ethernet extenders)  |
| Status and diagnostic indicators        | LEDs: US (supply voltage), ACT/LINK (Ethernet data traffic), ERR (errors)<br><br>2x LINK / 2x STAT (DSL data traffic port A and port B), DIAG (diagnostic messages)  |
| <b>Ambient Conditions</b>               |  |
| Ambient temperature (operation)         | -20 °C ... 60 °C (Freestanding (40 mm spacing to the right and left), no supply of other modules via the device)<br><br>-20 °C ... 55 °C (Mounted in rows with zero spacing and low power dissipation of aligned modules)<br><br>-20 °C ... 50 °C (Mounted in rows with zero spacing)<br><br>-20 °C ... 45 °C (Mounted in rows with zero spacing and supply of other modules via the device) |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C   |
| Permissible humidity (operation)        | 10 % ... 95 % (non-condensing)   |

|  |   |
|--|---|
| Permissible humidity (storage/transport) | 10 % ... 95 % (non-condensing)  |
| Altitude                                 | 5000 m (For restrictions see manufacturer's declaration)  |
| Degree of protection                     | IP20  |
| <b>General</b>                           |   |
| Electrical isolation                     | VCC // Ethernet // DSL (A) // DSL (B) // FE   |
| Test voltage data interface/power supply | 1.5 kVrms (50 Hz, 1 min.)   |
| Standards/regulations                    | EN 50121-4  |
| Electromagnetic compatibility            | Conformance with EMC Directive 2014/30/EU   |
| Net weight                               | 258.7 g   |
| Housing material                         | PA 6.6-FR   |
| Color                                    | gray  |
| MTTF                                     | 711 Years (SN 29500 standard, temperature 25°C, operating cycle 21 % (5 days a week, 8 hours a day))      |
|  | 308 Years (SN 29500 standard, temperature 40 °C, operating cycle 34.25 % (5 days a week, 12 hours a day)) |
|  | 125 Years (SN 29500 standard, temperature 40°C, operating cycle 100 % (7 days a week, 24 hours a day))    |
| Conformance                              | CE-compliant  |
| <b>Power supply</b>                      |   |
| Nominal supply voltage                   | 24 V DC $\pm$ 5 % (as an alternative or redundant, via backplane bus contact and system current supply)   |
|  | 5 V DC (configuration only, via mini-USB type B)  |
| Supply voltage range                     | 18 V DC ... 30 V DC   |
| Typical current consumption              | < 180 mA (24 V DC)  |
| Connection method                        | COMBICON plug-in screw terminal block   |
| <b>Dimensions</b>                        |   |

|   |  |
|---|--|
| Width                                   | 35 mm  |
| Height                                  | 99 mm  |
| Depth                                   | 114.5 mm   |
| <b>Environmental Product Compliance</b> |  |
| China RoHS                              | Environmentally Friendly Use Period = 50   |
| Reach and RoHS Compliant                | <u>Reach and RoHS Compliant</u>  |
| <b>Standards and Regulations</b>        |  |
| Electromagnetic compatibility           | Conformance with EMC Directive 2014/30/EU  |
| Vibration resistance                    | In acc. with EN 60068-2-6/IEC 60068-2-6<br>Result: 5g, 10...150 Hz, 2.5 h, in XYZ direction  |
| Shock                                   | In acc. with EN 60068-2-27/IEC 60068-2-27<br>Result: 15g   |
| EMC Immunity                            | EN 61000-4-2: Contact discharge $\pm 6$ kV, Indirect discharge $\pm 6$ kV<br>EN 61000-4-3: Frequency range 80 MHz ... 3 GHz<br>EN 61000-4-4: Criterion B<br>EN 61000-4-5: Signal $\pm 1$ kV (asymmetrical, shielded Ethernet cable)<br>EN 55011<br>EN 61000-4-6: Frequency range 0.15 MHz ... 80 MHz<br>EN 50121-4 |
| Conformance                             | CE-compliant   |
| ATEX                                    | II 3 G Ex nA IIC T4 Gc X   |
| UL, USA/Canada                          | cULus listed UL 508  |
| <b>Approvals</b>                        |  |
|   | UL Listed<br>cUL Listed<br>ATEX<br>cULus Listed  |
| <b>Commercial data</b>                  |  |
| Packing unit                            | 1  |
| Weight per piece                        | 0.0 g  |


---

Country of origin      Germany

### Point-to-point connection

---

There can be a maximum distance of 20 km between two devices. The Ethernet extender automatically recognizes if the path is constructed on a 2-wire or 4-wire path. If the devices have detected a 4-wire line, the transmission rate is automatically increased (usually doubled) depending on the line quality. If one of the connections fails, the data is transmitted via the remaining conductors at single transmission speed. In this way, a reliable redundancy operation is supported.

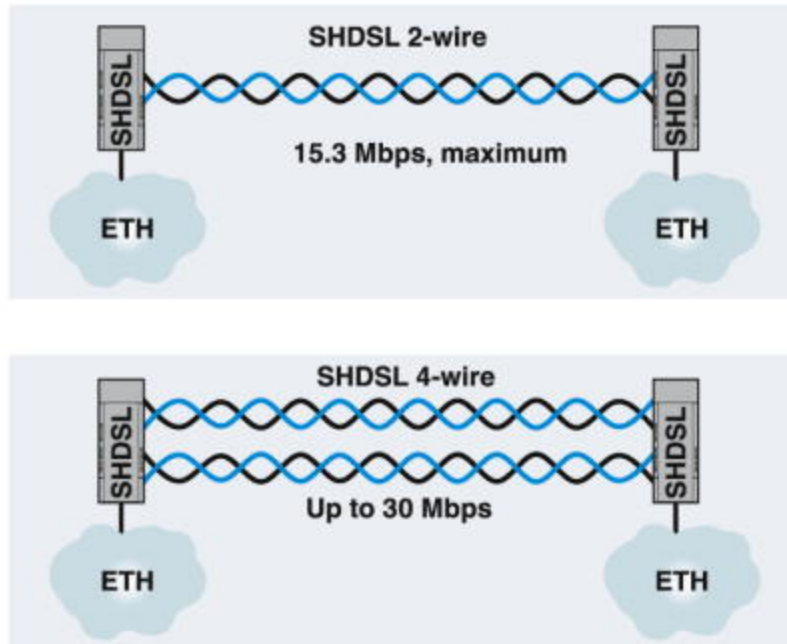


---

### Line structure

---

---


There can be a maximum distance of 20 km between two devices.

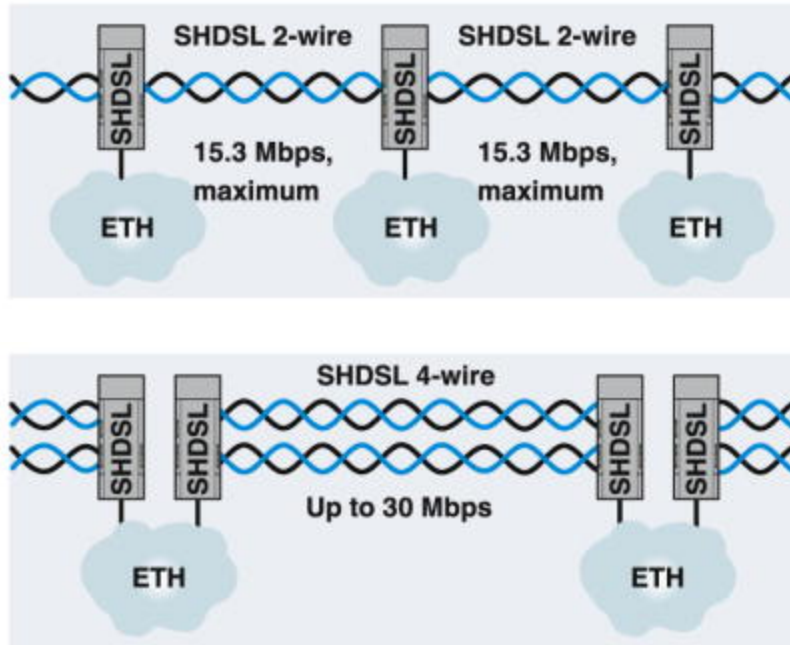

---

### Star structure

Since each device features two SHDSL ports, you need only three devices.

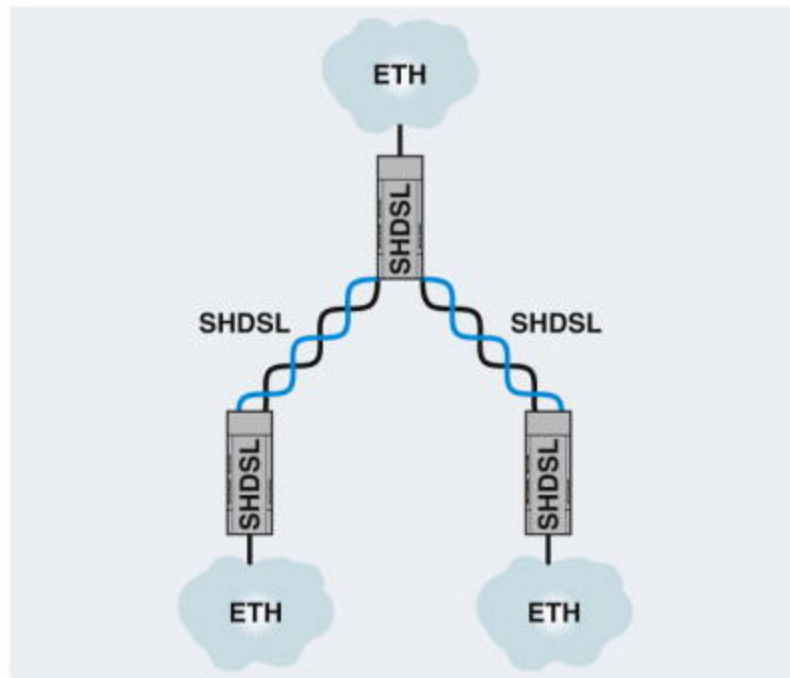


---

### Redundant ring structure

---

---

The overall availability of the system is significantly increased by a redundant ring. There can be a maximum distance of 20 km between two devices. You can integrate up to 50 devices in a ring. If there is a ring interruption, Ethernet communication is possible again after the following response time:  $t_{\text{Recovery}} = 600 \text{ ms} + \text{number of devices} \times 100 \text{ ms}$ . The paths of the SHDSL ring should show a very high connection quality during normal operation. If that is not the case, the reaction time can deviate from the value calculated above.

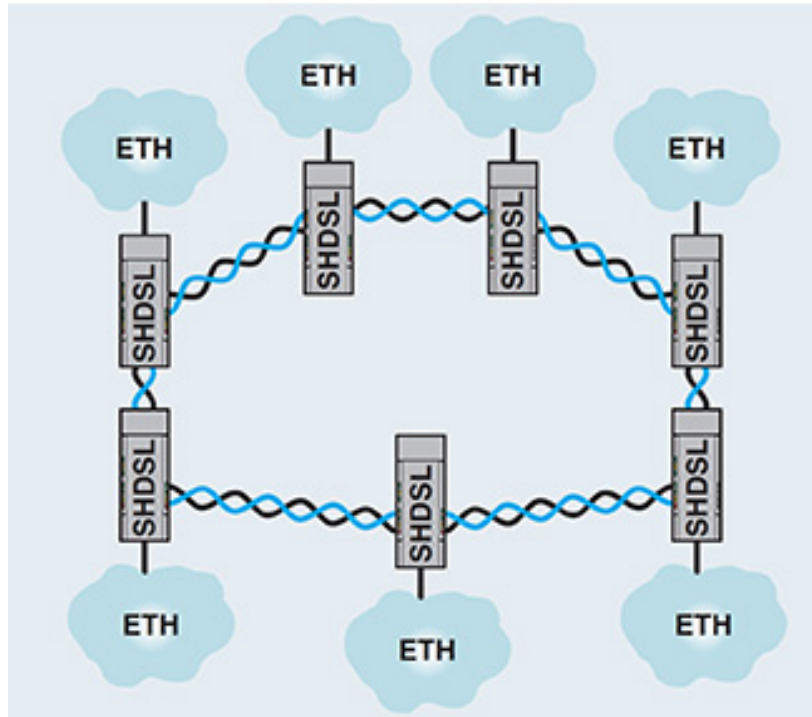


---

### Redundant data communication in rotating applications

---



The Ethernet extenders are connected via a 4-wire line. The connection is therefore redundantly established. Using the two digital outputs on the Ethernet extender, you can monitor the slip ring communication.

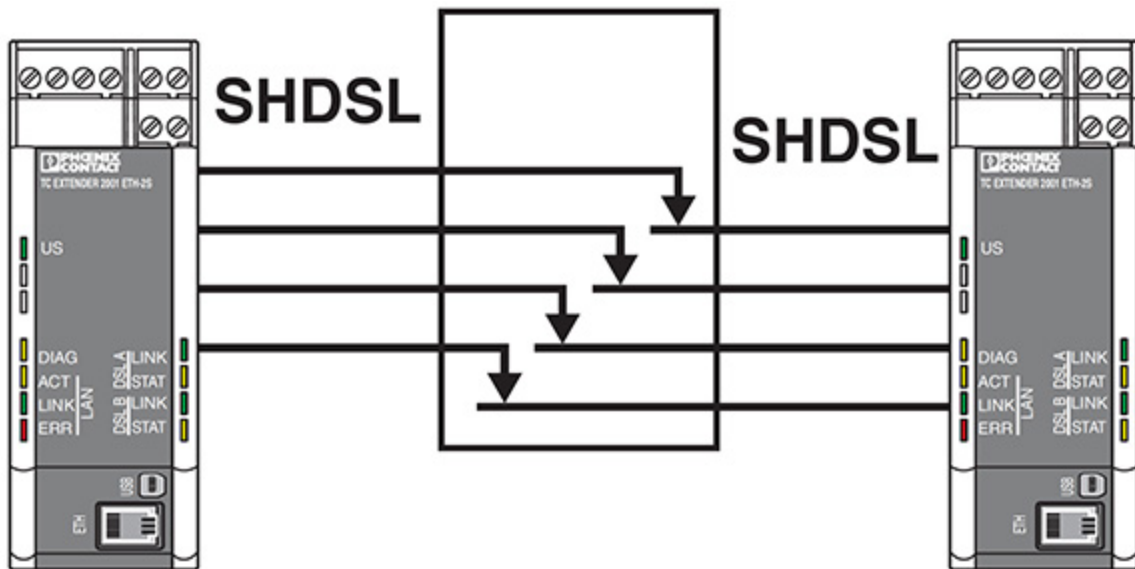

## Range

The maximum possible SHDSL data rate depends on several parameters. Two important parameters are the cable length and cable cross section. This diagram illustrates the dependency of the maximum SHDSL data rate on the line length with 3 cable types. Longer distances can be achieved using high-quality cables with larger diameters. The TC EXTENDER enables data rates over 2-wire copper from 32 kbps to 15.3 Mbps. Data rates of up to 30 Mbps are possible over 4-wire copper.

Figure 1: SHDSL data rate depending on the distance, 2-wire

