


**PIN ASSIGNMENT**

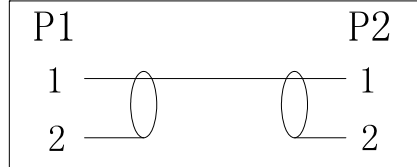

**TEST CONDITION:**  
 1.100% OPEN & SHORT TESTING  
 2.VOLTAGE:300V DC  
 3.INSULATION RESISTANCE :5M ohm Min.  
 4.CONDUCT RESISTANCE:2 ohm Max.

⑥	TIE	Black L=80mm	1	PCS
⑤	PE BAG	Size: 130*230*0.05mm print black"MADE IN CHINA""+"1PC"	1	PCS
④	TUBE	Heat shrink tube black, OD1.5*10mm	2	PCS
③	IN JACKET	Clear LD-PE	1.6	g
	OUT JACKET	PVC-40P color:black	6.6	g
②	CONNECT	RCA plug male,Ni-plated, insulator color:brown	2	PCS
①	CABLE	T.C (10/0.12+28/0.12)*1C+Srial OD3.0mm Jacket PVC color black	2000	mm
No.	NAME	DESCRIPTION	Q'TY	UNIT

**RoHS compliant**  
 Unit: mm

Scale	Free						Date	Name	Customer-No.
TOLERANCE						Drawn	17.07.2017	Fred	ASSMANN WSW-No. <b>AK302-2</b>
						Approved	17.07.2017	Fred	
DIM	TOL								Drawing-No.
		①	Drawn	17.07.2017	Fred	<b>ASSMANN</b> WSW components		<b>ASS 8026 CA</b>	rev00
Angle	TOL	Id.	Modification	Date	Name			Replace	Sheet