


COIL: @ 25°C	
RESISTANCE	22 OHMS ± 10%
NOMINAL VOLTAGE	6.0 VDC
MUST OPERATE	3.3 VDC
MUST RELEASE	.5 VDC MIN.

**CUSTOMER DATA SHEET**

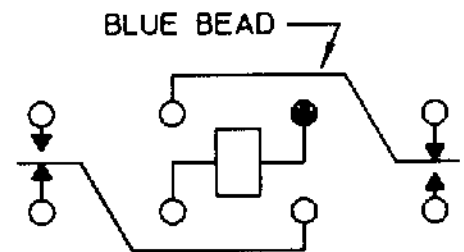

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

CONTACT RATING: 10A 30 VDC RES.  
 10A 115 VAC 400 Hz, 6A 30 VDC  
 INDUCTIVE 100,000 OPERATIONS

NOTES:	OPERATE TIME 13 MS MAX.
	RELEASE TIME 5 MS MAX.
	CONTACT BOUNCE 5 MS MAX. (NC)
	2 MS MAX. (NO)

DR. R.B. 12/7/94 CK. 12/7/94



CUST. Hi-G  
 CUST. NO. 2T-1C-106

TYPE 07 RELAY

**B07B932BZ1-8006**