

I I I I I I I I I I I I I I I I I I I	G	П	m	O





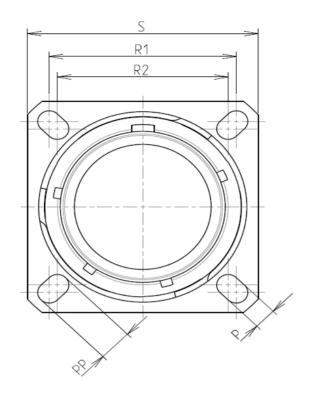

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 13

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range

: 48 hours

8D 0

G

13

F

03

Ρ

F

А

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
/V THREAD	M18x1-6g


ORIENTATION : A

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 13-03

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

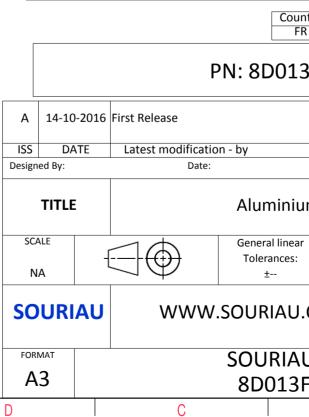

	ω		А			
					4	
AS EXA	AMPLE				3	
s whic er of t ndatio untry FR		mply with by a third par	ty		2	
.3F(03PA					
		CUSTOME	R DRAWING	MOD N°		
um	um Receptacle 8D series					
ar :	NPRDS / PROJECT 859					
	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N° 3PA-C			SHEET 1/2		
	В		А		1	

r		۵	г	m	U	0	
		Contact Layout				F	Panel Cutou
4		03 () () () () () () () () () () () () ()			2	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Ctc A B C	13-03 X Y 2.39 1.47 0 -2.79 -2.39 1.47				Dim	ØT_
ى ع						ØA ØAA R1 ØT	
	 -					SOURIAU shall not be lis due to a use of the P the Specifications issued l (professional rec	roducts wh by either of ommendat
N						PN: 8	Countr FR SD013F
						-2016 First Release TE Latest modification - by Date:	
					SCALE		uminium eral linear
-					NA		erances: ±
					FORMAT		RIAU.C JRIAU
		-			A3	80	0013F
	Н	l G	l F	E \	D	C	

