



PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR
 USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY
 PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK,INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 6976, DMR	08/26/05	DMR

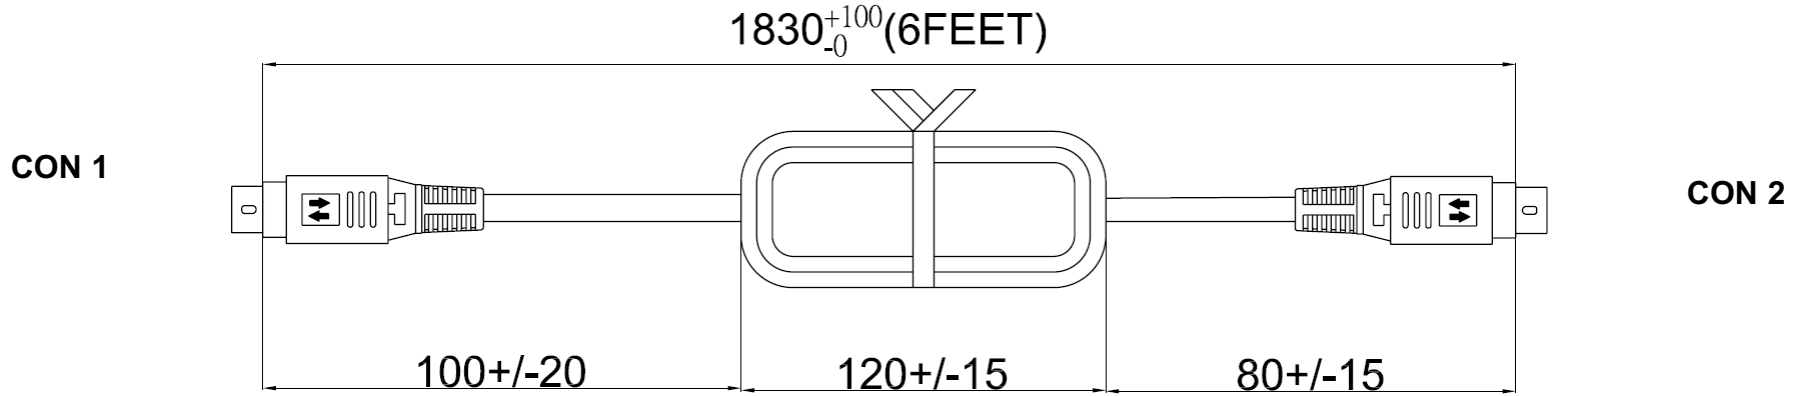

PIN OUT
 PIN 1:PIN1
 PIN 2:PIN2
 PIN 3:PIN3
 PIN 4:PIN4
 SHIELD/SHELL:SHIELD/SHELL

FRONT VIEW

GENERAL SPECIFICATIONS:

CABLE TYPE / SIZE: UL 2464, 18 AWG, 4 CONDUCTORS+SHIELD
 CABLE JACKET COLOR: BLACK
 OVERALL LENGTH (L): 1830+100, -0 mm
 CONNECTOR 1: KYCON KPP-4P or EQUIVALENT
 CONNECTOR 2: KYCON KPP-4P or EQUIVALENT

RELEASED
 By N.Frost at 10:00 am, Jan 17, 2018

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
		TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		GlobTek, Inc. 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111 www.globtek.com
		MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY: DMR	DATE: 08/26/05	DWG TITLE: LOW VOLTAGE CORDSET		
DRAWN: NF	DATE: 08/26/05	FSCN No.: G, CC	SIZE A	MODEL: N / A
APRVD: DMR	DATE: 08/26/05	SCALE: NONE		PART NO: KPP424646FKPP4
				REV. A
				SHEET 1/1

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL,CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice