

STRADELLA-16-HB-W

~90° wide beam for industrial applications

SPECIFICATION:

Dimensions	49.5 x 49.5 mm
Height	7.1 mm
Fastening	pin, screw
ROHS compliant	yes ⓘ


MATERIALS:

Component	Type	Material	Colour	Finish
STRADELLA-16-HB-W	Multi-lens	PMMA	clear	

ORDERING INFORMATION:


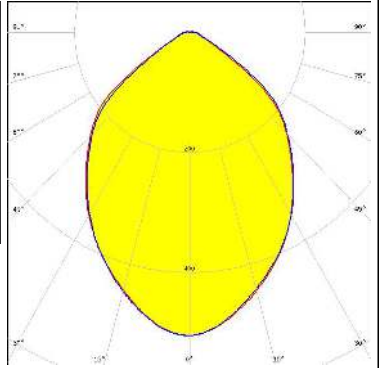
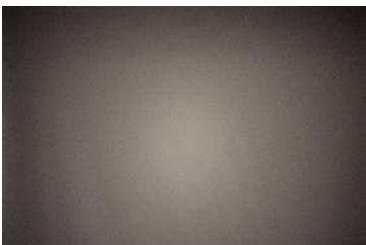
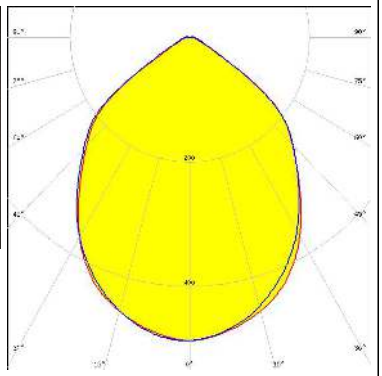

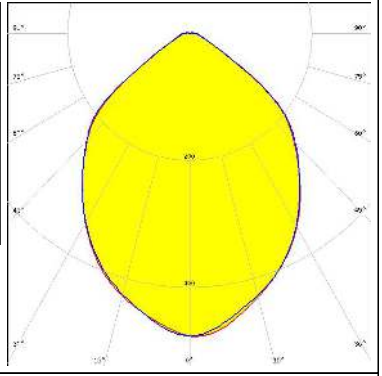
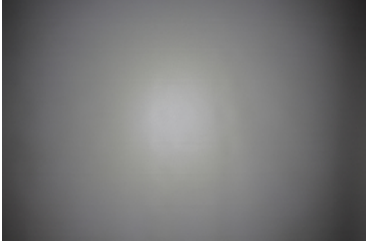
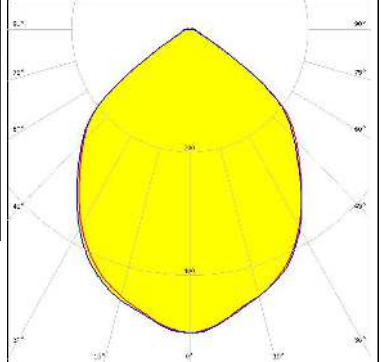
Component	Qty in box	MOQ	MPQ	Box weight (kg)
C15432_STRADELLA-16-HB-W » Box size: 480 x 280 x 300 mm	800	160	160	6.6

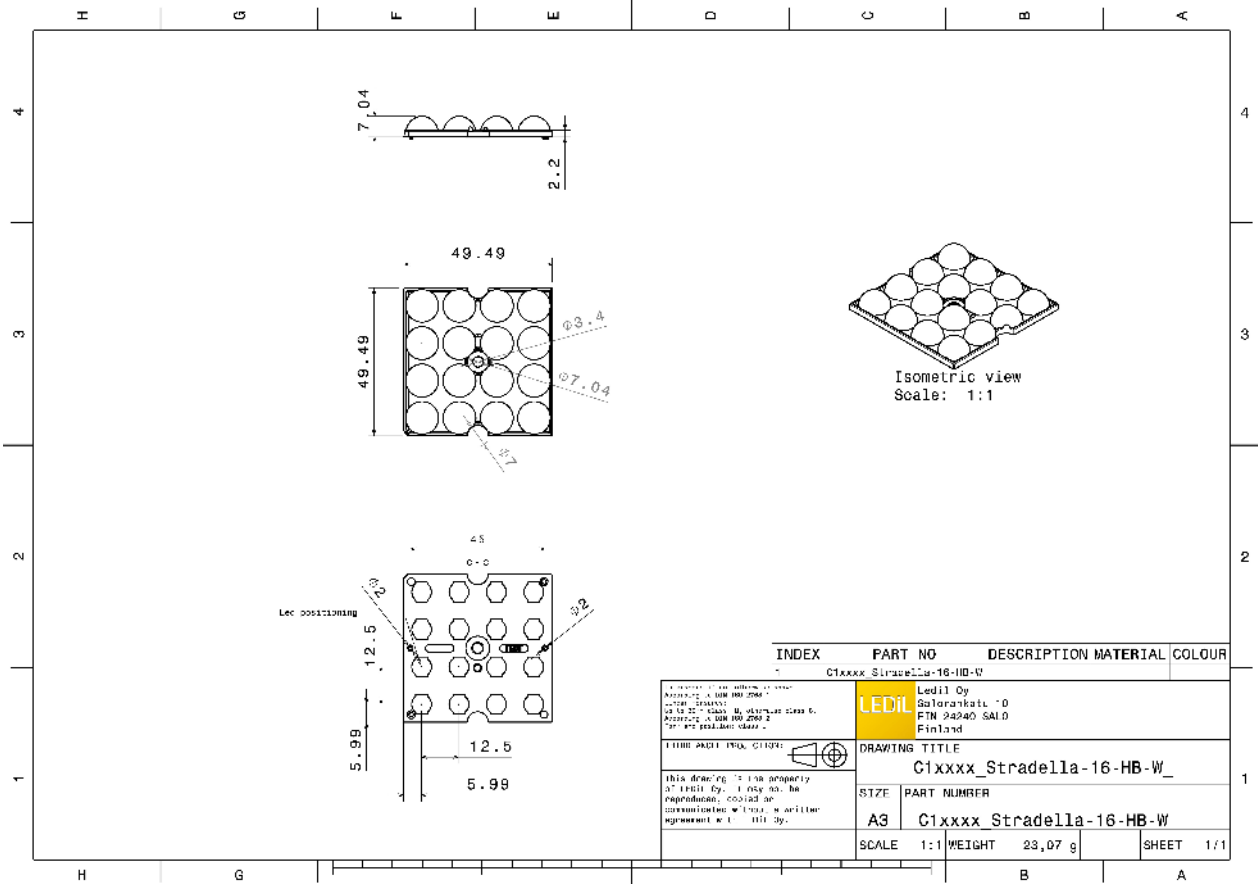




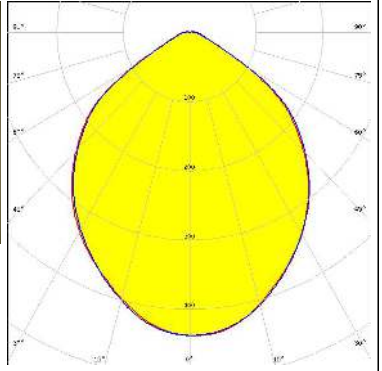

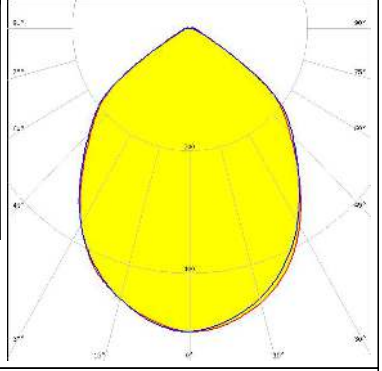
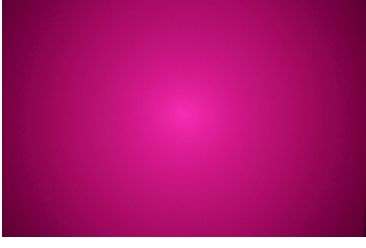
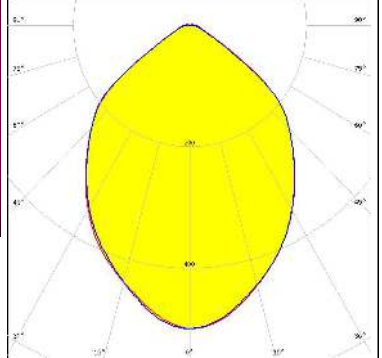


See also our general installation guide: www.ledil.com/installation_guide


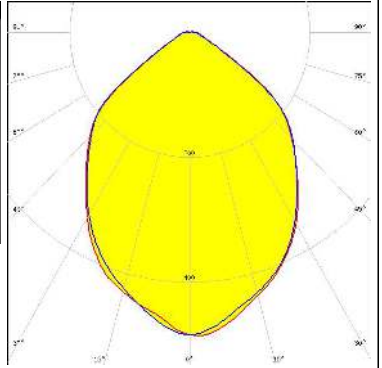
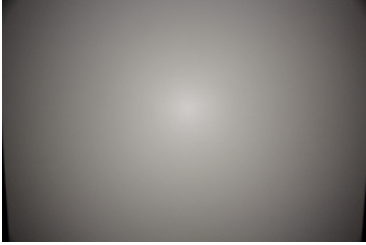
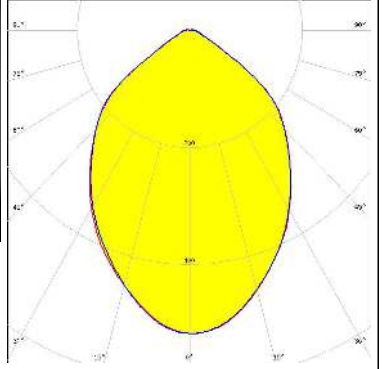
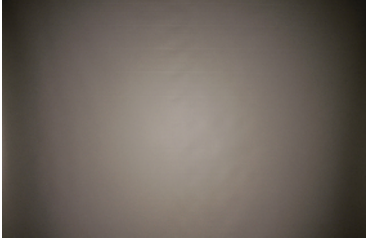
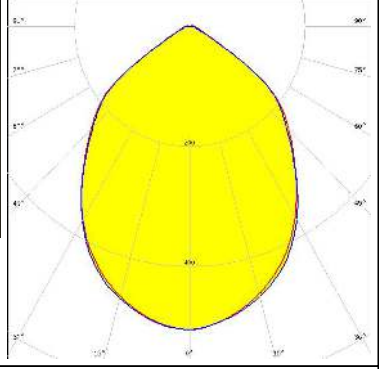

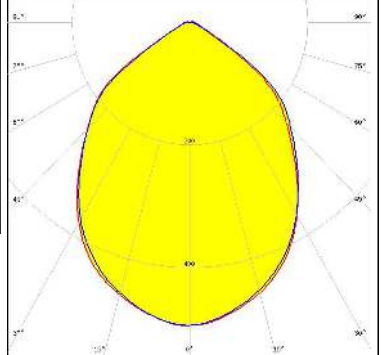
OPTICAL RESULTS (MEASURED):

<p>CREE LED</p> <p>LED J Series 3030 FWHM / FWTM 86.0° / 125.0° Efficiency 95 % Peak intensity 0.5 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>ELECTRIO</p> <p>LED EHP-223.5x50-1604-xx-70-LS30-06-NTC FWHM / FWTM 91.0° / 124.0° Efficiency 96 % Peak intensity 0.5 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>NICHIA</p> <p>LED NFSx757D FWHM / FWTM 91.0° / 126.0° Efficiency 94 % Peak intensity 0.5 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>NICHIA</p> <p>LED NFSx757G FWHM / FWTM 92.0° / 121.0° Efficiency 94 % Peak intensity 0.5 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		

OPTICAL RESULTS (MEASURED):
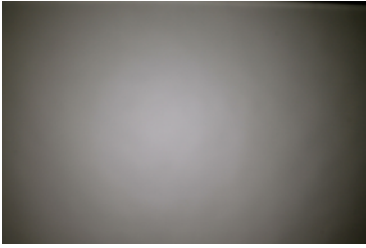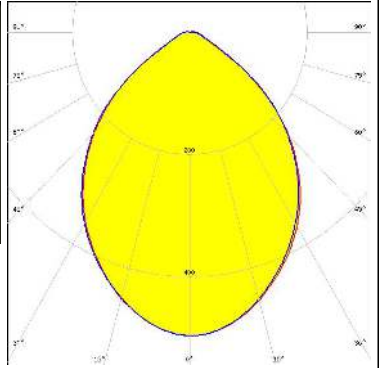
<p>NICHIA</p> <p>LED NVSW219D FWHM / FWTM 87.0° / 125.0° Efficiency 94 % Peak intensity 0.5 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>NICHIA</p> <p>LED NVSW319B FWHM / FWTM 96.0° / 131.0° Efficiency 94 % Peak intensity 0.4 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>OSRAM</p> <p>LED PrevaLED Brick MP 4x16 FWHM / FWTM 88.0° / 122.0° Efficiency 94 % Peak intensity 0.5 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>OSRAM <small>Opto Semiconductors</small></p> <p>LED Duris S5 (2 chip) FWHM / FWTM 87.0° / 125.0° Efficiency 94 % Peak intensity 0.5 cd/lm LEDs/each optic 1 Light colour Purple Required components:</p>		


OPTICAL RESULTS (MEASURED):

<p>OSRAM Opto Semiconductors</p> <p>LED Duris S5 (Single chip)</p> <p>FWHM / FWTM 88.0° / 125.0°</p> <p>Efficiency 93 %</p> <p>Peak intensity 0.5 cd/m</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>		
<p>OSRAM Opto Semiconductors</p> <p>LED OSCONIQ S 3030 (QSLR31)</p> <p>FWHM / FWTM 84.0° / 124.0°</p> <p>Efficiency 94 %</p> <p>Peak intensity 0.5 cd/m</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>		
<p>PHILIPS</p> <p>LED Fortimo FastFlex LED 4x16 DHE G4</p> <p>FWHM / FWTM 87.0° / 122.0°</p> <p>Efficiency 94 %</p> <p>Peak intensity 0.5 cd/m</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>		
<p>SAMSUNG</p> <p>LED HiLOM RM64 (LM301B)</p> <p>FWHM / FWTM 88.0° / 123.0°</p> <p>Efficiency 94 %</p> <p>Peak intensity 0.5 cd/m</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>		

OPTICAL RESULTS (MEASURED):


SAMSUNG

LED LM231 A/B
 FWHM / FWTM 88.0° / 126.0°
 Efficiency 94 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

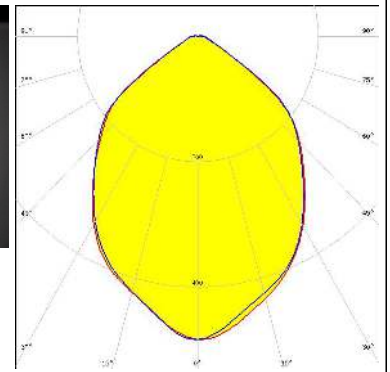


SCIOLUX

LED XLE-S44XTEHE (XT-E HE)
 FWHM / FWTM 88.0° / 133.0°
 Efficiency 94 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:


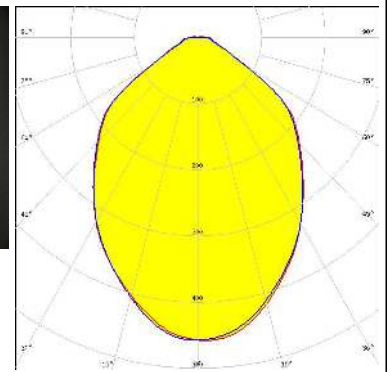


SCIOLUX


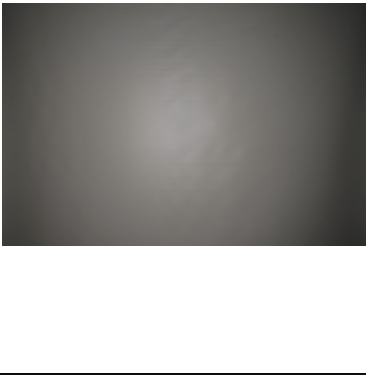
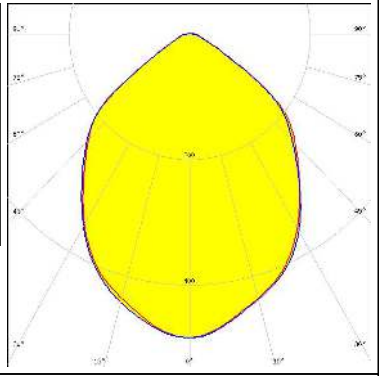


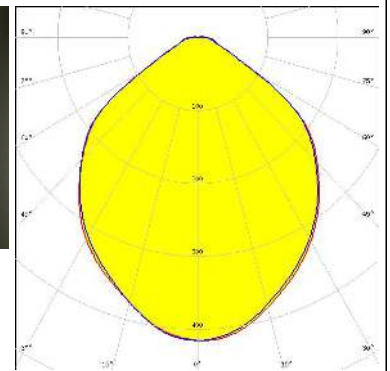

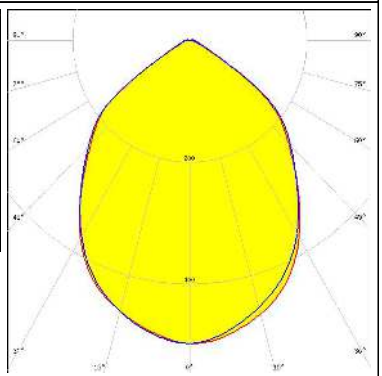


LED XLE-S48XPG3 (XP-G3)
 FWHM / FWTM 100.0° / 134.0°
 Efficiency 94 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

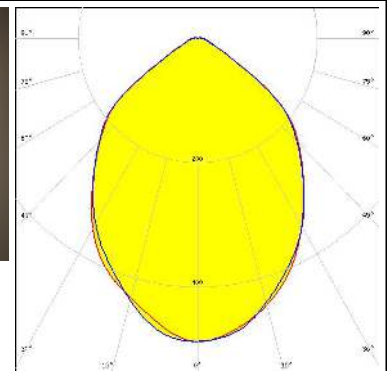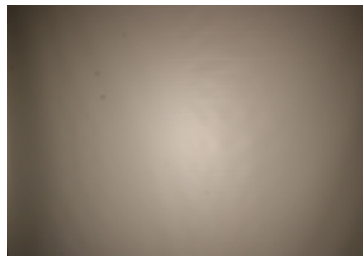


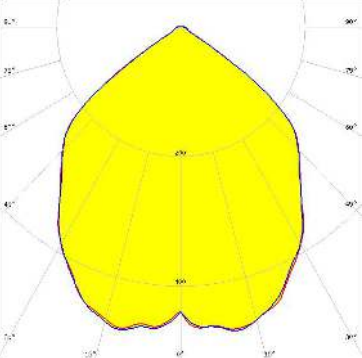

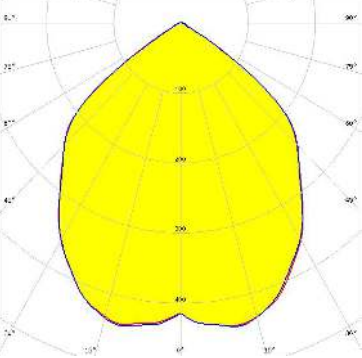

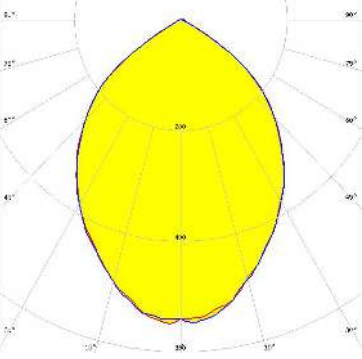

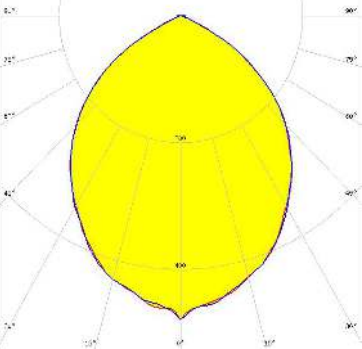
SEOUL SEMICONDUCTOR
 LED SEOUL 3030
 FWHM / FWTM 87.0° / 125.0°
 Efficiency 93 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:



OPTICAL RESULTS (MEASURED):
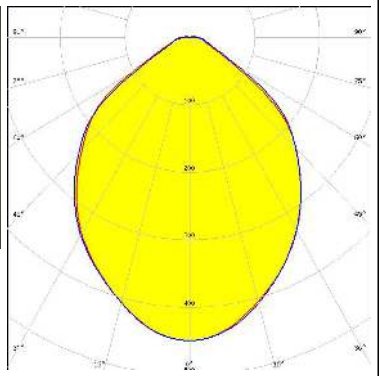
<p> SEOUL SEMICONDUCTOR</p> <p>LED: SEOUL DC 3030</p> <p>FWHM / FWTM: 90.0° / 129.0°</p> <p>Efficiency: 94 %</p> <p>Peak intensity: 0.5 cd/m</p> <p>LEDs/each optic: 1</p> <p>Light colour: White</p> <p>Required components:</p>		
<p> SEOUL SEMICONDUCTOR</p> <p>LED: Z5M3</p> <p>FWHM / FWTM: 93.0° / 132.0°</p> <p>Efficiency: 94 %</p> <p>Peak intensity: 0.5 cd/m</p> <p>LEDs/each optic: 1</p> <p>Light colour: White</p> <p>Required components:</p>		
<p>TRIDONIC</p> <p>LED: RLE 4x16 4000lm MP ADV2 OTD</p> <p>FWHM / FWTM: 88.0° / 123.0°</p> <p>Efficiency: 94 %</p> <p>Peak intensity: 0.5 cd/m</p> <p>LEDs/each optic: 1</p> <p>Light colour: White</p> <p>Required components:</p>		
<p>TRIDONIC</p> <p>LED: RLE 4x8 2000lm MP ADV2 OTD</p> <p>FWHM / FWTM: 88.0° / 123.0°</p> <p>Efficiency: 94 %</p> <p>Peak intensity: 0.5 cd/m</p> <p>LEDs/each optic: 1</p> <p>Light colour: White</p> <p>Required components:</p>		


OPTICAL RESULTS (SIMULATED):

<p></p> <p>LED CSP 2727 (BXCP)</p> <p>FWHM / FWTM 98.0° / 116.0°</p> <p>Efficiency 96 %</p> <p>Peak intensity 0.5 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p></p> <p>LED CSP 2727 (BXCP)</p> <p>FWHM / FWTM 97.0° / 118.0°</p> <p>Efficiency 87 %</p> <p>Peak intensity 0.4 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p> <p style="background-color: #ADD8E6; padding: 2px; display: inline-block;">Protective plate, glass</p>	
<p></p> <p>LED J Series 5050 Round LES</p> <p>FWHM / FWTM 85.0° / 121.0°</p> <p>Efficiency 96 %</p> <p>Peak intensity 0.6 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p></p> <p>LED XP-G2 HE</p> <p>FWHM / FWTM 91.0° / 128.0°</p> <p>Efficiency 94 %</p> <p>Peak intensity 0.5 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	


OPTICAL RESULTS (SIMULATED):




LED XT-E
 FWHM / FWTM 99.0° / 126.0°
 Efficiency 93 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

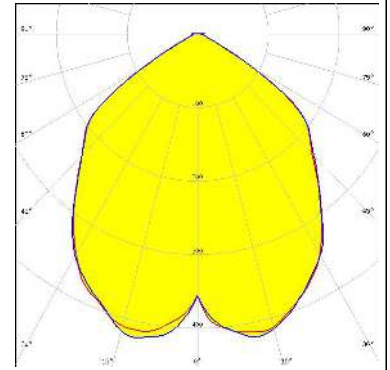


LED LUXEON 5050 Square LES
 FWHM / FWTM 83.0° / 121.0°
 Efficiency 96 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

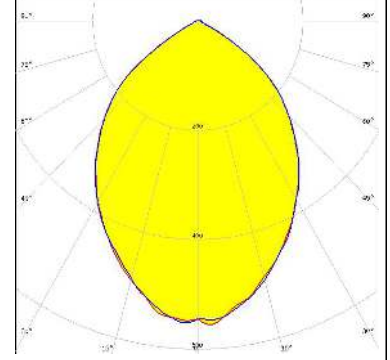





LED LUXEON HL1Z
 FWHM / FWTM 106.0° / 118.0°
 Efficiency 95 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

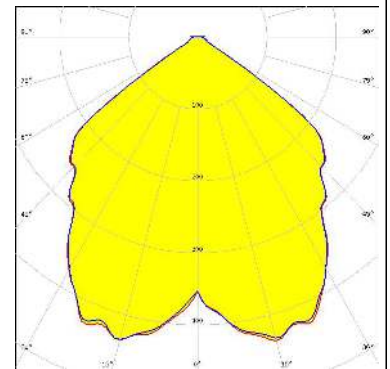

LED NVSW519A
 FWHM / FWTM 99.0° / 126.0°
 Efficiency 93 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

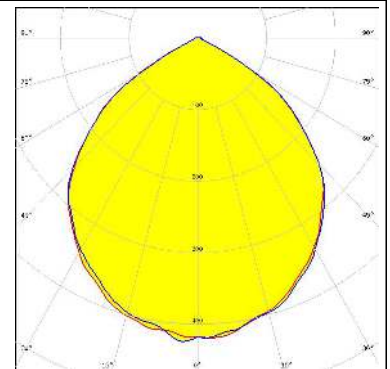

OPTICAL RESULTS (SIMULATED):

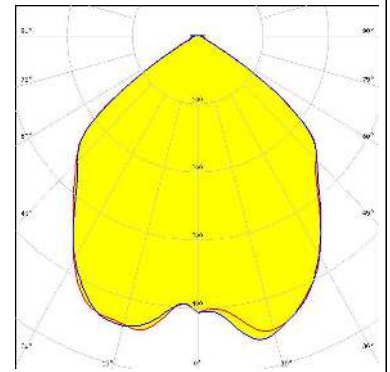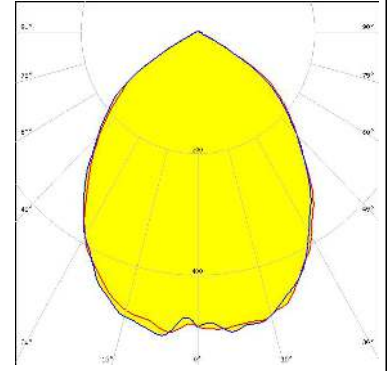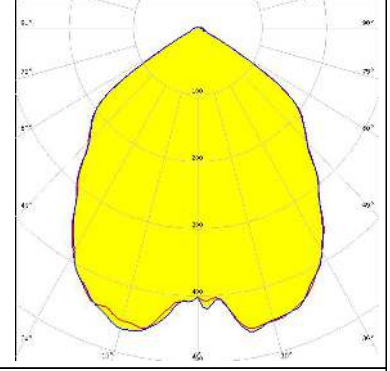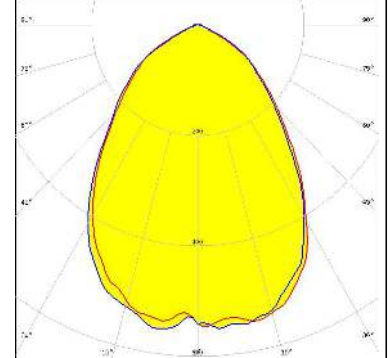
<p>NICHIA</p> <p>LED NVSxE21A FWHM / FWTM 98.0° / 121.0° Efficiency 94 % Peak intensity 0.5 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED Duris E5 FWHM / FWTM 87.0° / 123.0° Efficiency 94 % Peak intensity 0.5 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED OSCONIQ C 2424 FWHM / FWTM 94.0° / 122.0° Efficiency 96 % Peak intensity 0.5 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED OSCONIQ P 3030 FWHM / FWTM 79.0° / 128.0° Efficiency 97 % Peak intensity 0.6 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	

OPTICAL RESULTS (SIMULATED):

OSRAM

Opto Semiconductors


LED OSLO Square CSSRM2/CSSRM3
 FWHM / FWTM 97.0° / 124.0°
 Efficiency 94 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour Red
 Required components:

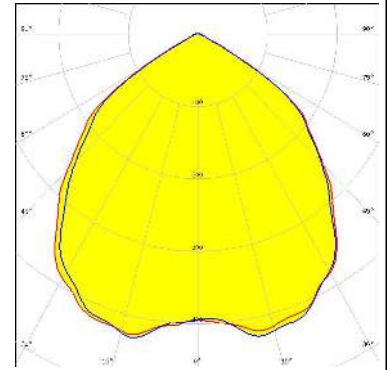

OSRAM


Opto Semiconductors

LED SFH 4715AS
 FWHM / FWTM 66.0° / 106.0°
 Efficiency 96 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour IR
 Required components:

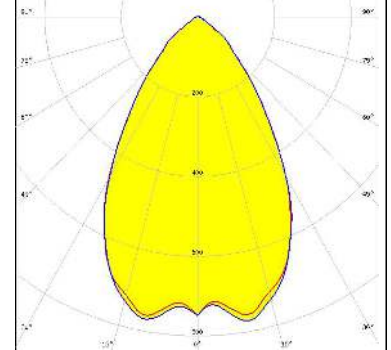

SAMSUNG


LED LH231B
 FWHM / FWTM 92.0° / 118.0°
 Efficiency 95 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

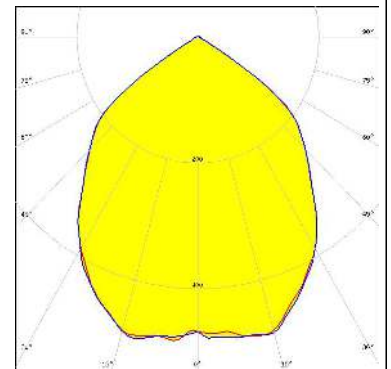

SAMSUNG

LED LH231B
 FWHM / FWTM 92.0° / 118.0°
 Efficiency 87 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:


Protective plate, glass

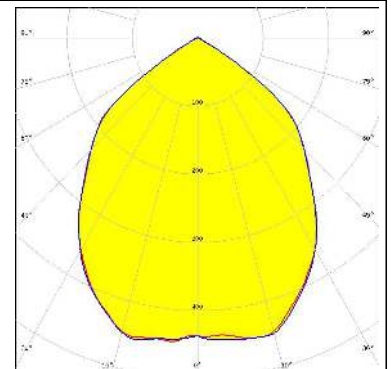

OPTICAL RESULTS (SIMULATED):

SAMSUNG


LED LH351C
 FWHM / FWTM 97.0° / 124.0°
 Efficiency 94 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

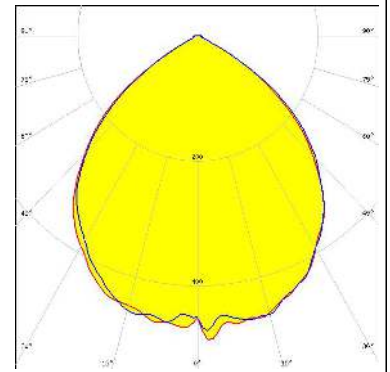

SAMSUNG


LED LM301B
 FWHM / FWTM 113.0° / 133.0°
 Efficiency 96 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

Protective plate, glass

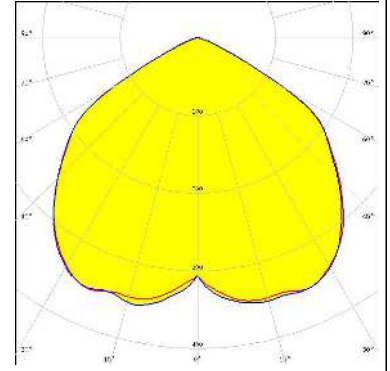


SAMSUNG

LED LM301B
 FWHM / FWTM 90.0° / 125.0°
 Efficiency 94 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

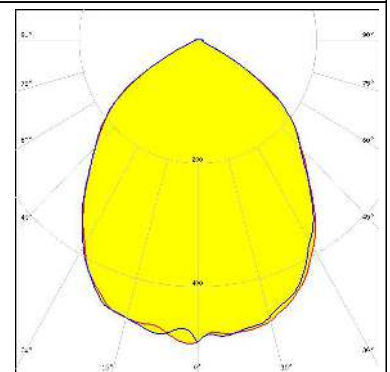
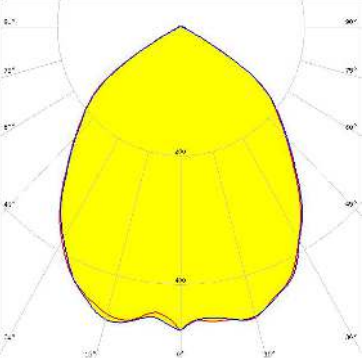

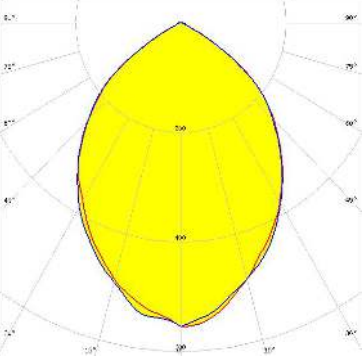

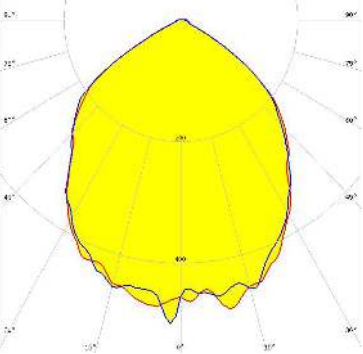


SAMSUNG

LED LM302D
 FWHM / FWTM 90.0° / 124.0°
 Efficiency 96 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

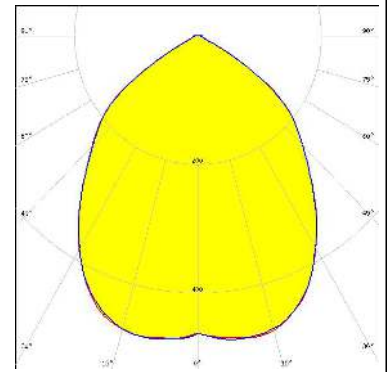

OPTICAL RESULTS (SIMULATED):

<p> SEOULED SEMICONDUCTOR</p> <p>LED: SEOUL DC 3030C</p> <p>FWHM / FWTM: 91.0° / 124.0°</p> <p>Efficiency: 96 %</p> <p>Peak intensity: 0.5 cd/lm</p> <p>LEDs/each optic: 1</p> <p>Light colour: White</p> <p>Required components:</p>	
<p> SEOULED SEMICONDUCTOR</p> <p>LED: SEOUL DC 5050 6V</p> <p>FWHM / FWTM: 84.0° / 122.0°</p> <p>Efficiency: 94 %</p> <p>Peak intensity: 0.6 cd/lm</p> <p>LEDs/each optic: 1</p> <p>Light colour: White</p> <p>Required components:</p>	
<p> SEOULED SEMICONDUCTOR</p> <p>LED: Z8Y22T</p> <p>FWHM / FWTM: 94.0° / 124.0°</p> <p>Efficiency: 94 %</p> <p>Peak intensity: 0.5 cd/lm</p> <p>LEDs/each optic: 1</p> <p>Light colour: White</p> <p>Required components:</p>	

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)