
THIS COPY IS PROVIDED ON A	A RESTRICTED BASIS AND IS NOT TO BE U	SED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.
Material	High Conductivity Seamless Copper Tube	
Plating	Electro-Tin	77 R Ref
Wire Size	250 STR/FLEX	
Wire Type	Stranded Copper: Class G, H, I, K, M, Locomotive	250 STR/FLEX 1.787-04 ANDUIT
Wire Strip Length	1-1/16 in.	250 STR/FLEX 250 S
Stud Size	3/4 in.	
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.	.78±.02 DIA
UL Temperature Rating	90° C	
C.S.A Certified Wire Connector	Yes	3.08±.06
Panduit Color Code on Barrel	YELLOW	ļ -
Panduit Die Index No. on Barrel	P62	Wire inspection window—
Alternate Industry Die Index No. () on Barrel	(16)	





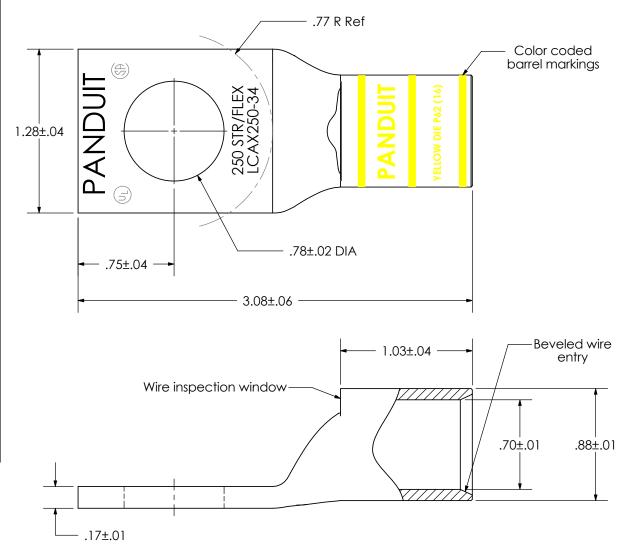

						CORP. TINLEY PARK, ILLINOI
						LCAX250-34-X
00	1/08	JHNU	LEM	RELEASED		Copper Lug - One-Hole, Standard Flex Barrel
REV	DATE	BY	СНК	DESCRIPTION	ECN	SCALE N/A DRAWING NO / CAD FILE LCAX250-34-CUST