

Apprentice / OEM Style Test Lead Set

Features

- UL/CSA Compliant
- Compatible with All Industry Standard 4mm Instrument (DMM) Sockets
- Modular Test Leads Allow the User to Choose the Appropriate Accessory for Application

NTE Type No.	Set Contains
72-065	1 Pair 48" (1.2m) Modular, Double Insulated Silicone Lead Assemblies 1 Pair Extra Sharp, Stainless Steel Probes 1 Pair Fully Insulated Crocodile Clips 1 Pair Probe Tip Insulation Extenders



Specifications


IEC 1010 Rating: 1000V CAT3 / 600V CAT4 □ 20 Amps

Test Lead Set

Features

- UL/CSA Compliant
- Compatible with All Industry Standard 4mm Instrument Sockets
- 48" (1.2m) Double Insulated, Bi-Color Silicone Cable Boasts 250+ Copper Strands for Maximum Flexibility and Overall Performance
- Bi-Color Insulation Design Alerts User if Exposed Conductor Shock Hazard is Imminent

NTE Type No.	Termination
72-066	OEM Fixed Shroud to Fixed Shroud
72-067	OEM Fixed Shroud to Right Angle

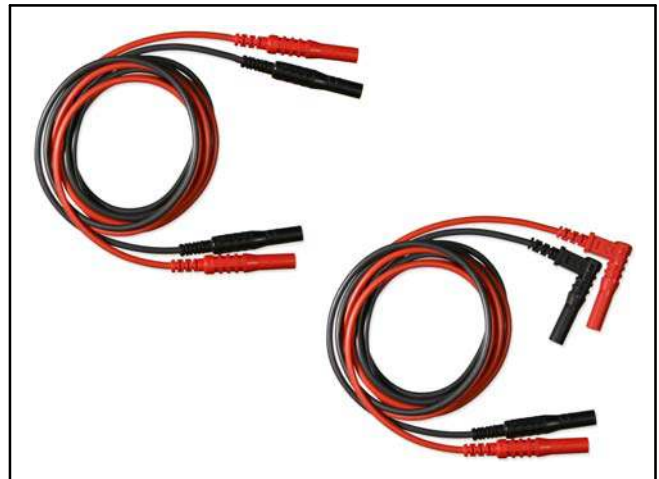

Specifications

IEC 1010 Rating: 1000V CAT3 / 600V CAT4 □ 20 Amps

8-32 UNC Threaded Probe Test Lead Set

Features

- Compatible with All Industry Standard 4mm Instrument Sockets
- 48" (1.2m) Double Insulated, Bi-Color Silicone Cable Boasts 250+ Copper Strands for Maximum Flexibility and Overall Performance
- Bi-Color Insulation Design Alerts User if Exposed Conductor Shock Hazard is Imminent
- Industry Standard 8-32-UNC-2A Threaded Probe Tip Accepts Screw-On Accessories
- Extremely Sharp Stainless Steel Probe Tip

NTE Type No.	Termination
72-068	Right Angle Plug (Pictured)
72-069	Shutter Plug



Specifications

IEC 1010 Rating: 1000V CAT3 □ 20 Amps

Temperature Rating: -10° to +150°C

Standard Test Lead Probe Set

Features

- Compatible with All Industry Standard 4mm Instrument Sockets
- 48" (1.2m) Double Insulated, Bi-Color Silicone Cable Boasts 250+ Copper Strands for Maximum Flexibility and Overall Performance
- Bi-Color Insulation Design Alerts User if Exposed Conductor Shock Hazard is Imminent
- Industry Standard 8-32-UNC-2A Threaded Probe Tip Accepts Screw-On Accessories
- Extremely Sharp Stainless Steel Probe Tip

NTE Type No.	Set Contains
72-097	1 Pair (Red & Black) of Double Insulated Silicone Lead Assemblies with Right Angle Plug 1 Pair (Red & Black) Fully Insulated Screw-On Crocodile Clips (Note 1)

Note 1. This item rated 300V CAT2 10 Amps



Specifications

IEC 1010 Rating: 1000V CAT3 \square 10 Amps
Temperature Rating: -10° to +150°C

Test Lead Set

Features

- Compatible with All Industry Standard 4mm Instrument Sockets
- 48" (1.2m) Double Insulated, Bi-Color Silicone Cable Boasts 250+ Copper Strands for Maximum Flexibility and Overall Performance
- Bi-Color Insulation Design Alerts User if Exposed Conductor Shock Hazard is Imminent

NTE Type No.	Set Contains
72-077	1 Pair (Red & Black) of Double Insulated Silicone Lead Assemblies 1 Pair (Red & Black) Test Probes 1 Pair (Red & Black) Sprung Hooks 1 Pair (Red & Black) of Large, Fully Insulated Crocodile Clips



Specifications

IEC 1010 Rating: 1000V CAT3 \square 20 Amps

Lantern Fronted Test Lead Set

Features

- Compatible with All Industry Standard 4mm Instrument Sockets
- 48" (1.2m) Double Insulated, Bi-Color Silicone Cable Boasts 250+ Copper Strands for Maximum Flexibility and Overall Performance
- Bi-Color Insulation Design Alerts User if Exposed Conductor Shock Hazard is Imminent
- Industry Standard 4mm Lantern Tip Accepts Push-On Accessories

NTE Type No.	Termination
72-070	Right Angle Plug
72-071	Shutter Plug

Specifications

IEC 1010 Rating: 1000V CAT3 \square 20 Amps
Temperature Rating: -10° to +150°C



Lantern Fronted Test Lead Set

Features

- Compatible with All Industry Standard 4mm Instrument Sockets
- 48" (1.2m) Double Insulated, Bi-Color Silicone Cable Boasts 250+ Copper Strands for Maximum Flexibility and Overall Performance
- Bi-Color Insulation Design Alerts User if Exposed Conductor Shock Hazard is Imminent
- Industry Standard 4mm Lantern Tip Accepts Push-On Accessories

NTE Type No.	Set Contains
72-090	1 Pair (Red & Black) of 48" (1.2m) Double Insulated Silicone Leads. Each lead is terminated by a 4mm Lantern Probe Tip on one end, the other end is terminated in a Right Angle Plug 1 Pair (Red & Black) of 1kV large Crocodile Clips



Specifications

IEC 1010 Rating: 1000V CAT3 □ 20 Amps

Temperature Rating: -10° to +150°C

OEM Fixed Tip Fused Probe Set

Features

- UL/CSA Compliant
- 48" (1.2m) Double Insulated, Bi-Color Silicone Cable Boasts 250+ Copper Strands for Maximum Flexibility and Overall Performance
- Compatible with All Industry Standard 4mm Instrument Sockets

NTE Type No.	Set Contains
72-078	1 Pair (Red & Black) of Double Insulated Silicone Lead Assemblies with Right Angle Plug

Specifications

IEC 1010 Rating: 1000V CAT3 / 600V CAT4 □

Temperature Rating: -10° to +150°C

Fuse Rating: 500mA/1000V 50kA

Accessories

Replacement Fuse: 72-002

Compatible Crocodile Clips: 72-059 (Black), 72-060 (Red)



Multi-Stacking Safety Patch Cords

Features

- Compatible with All Industry Standard 4mm Banana Plugs and Sockets
- 48" (1.2m) Double Insulated, Bi-Color Silicone Cable Boasts 250+ Copper Strands for Maximum Flexibility and Overall Performance

NTE Type No.	Description
72-093	1 Pair (Red & Black) of Double Insulated Silicone Lead Assemblies with Stackable Plug

Specifications

IEC 1010 Rating: 1000V CAT3 / 600V CAT4 □ 20 Amps




Universal Kelvin Test Lead Set

Features

- Gold-Plated Kelvin Crocodile Clips Allow 4-Wire Resistive Measurements
- 48" (1.2m) Double Insulated, Bi-Color Silicone Cable Boasts 250+ Copper Strands for Maximum Flexibility and Overall Performance
- Compatible with All Industry Standard 4mm Instrument Sockets and Spade-Accommodating Binding Posts

NTE Type No.	Kit Contains
72-076	1 Pair (Red/Grey & Black/Grey) of 48" (1.2m) Kelvin Crocodile Clip Leads using low loss 1mm ² multistranded double skin silicone cables terminating in 4mm Shutter Plugs color coded to each relevant Jaw. 2 Pairs (2 Red & 2 Black) of Full Safety Spade Adapters.

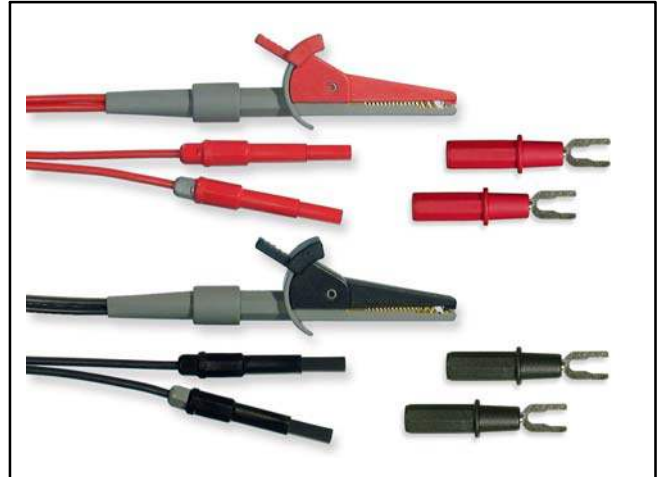

OEM Fixed Lead Probe Test Lead Set

Features

- UL/CSA Compliant
- 48" (1.2m) Double Insulated, Bi-Color Silicone Cable Boasts 250+ Copper Strands for Maximum Flexibility and Overall Performance
- 8-32-UNC-2A Threaded Notched Needle Tip Accepts Screw-On Accessories
- Compatible with "Simpson" Style Instruments

NTE Type No.	Set Contains
NEW 72-175	1 Pair (Red & Black) of Double Insulated Silicone Lead Assemblies with Right Angle Sockets



Specifications

IEC 1010 Rating: 1000V CAT3
 Temperature Rating: -10° to +150°C

Right Angle Test Lead

Features

- CE Compliant
- 48" (1.2m) Double Insulated, #18 AWG (65/36) Tinned Copper with +90°C PVC Insulation
- Accepts Industry Standard 2mm Screw-On Accessories
- 2mm Test Probe Brass Pin with M4 Thread
- Supplied with Protective Cap
- 4mm Shrouded Right Angle Plug
- Highly Flexible 48" Leads

NTE Type No.	Description
72-184-0	1 Test Lead Assembly, Black, Test Probe to Right Angle Shrouded Banana Plug
72-184-2	1 Test Lead Assembly, Red, Test Probe to Right Angle Shrouded Banana Plug
72-184-KIT	Test Probe Right Angle Shrouded Banana Plug Contains 1 Black and 1 Red

Specifications


Rating: 1000V CAT3 10 Amps
 Temperature Rating: -10° to +120°C



Multi-Color Insulated Plunger Clip Lead Set

Features

- Overall Length: 16" (.406 Meter)
- ABS Hook Insulation with Copper Clip
- 22 AWG Wire

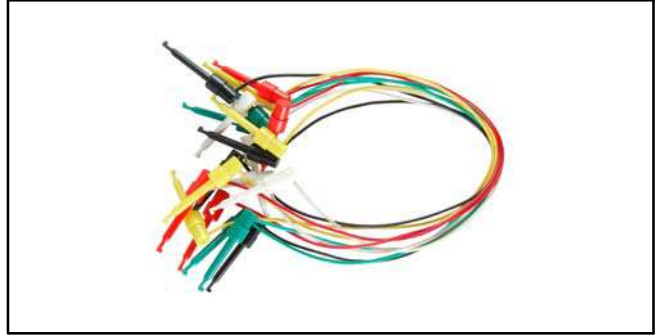

NEW

NTE Type No.	Contains
72-110	2 Black, 2 Red, 2 Yellow, 2 Green and 2 White Jumper Leads

Multi-Color Insulated Alligator Clip Lead Set

Features

- Overall Length: 17.72" (.450 Meter)
- Clip Jaw Opening: .320" (8.13mm)
- 22 AWG Wire



NTE Type No.	Contains
72-111	2 Black, 2 Red, 2 Yellow, 2 Green and 2 White Jumper Leads