


1. Wiring Diagram.

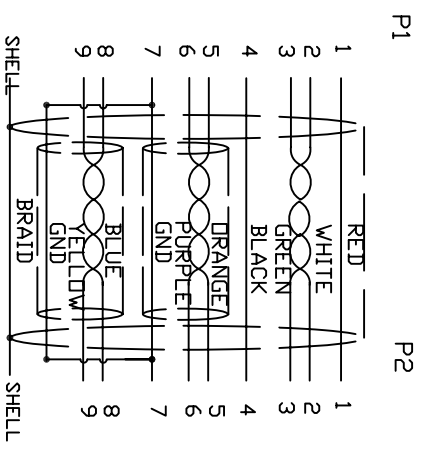

2. Cable test condition :

Open / Short : 100%
 Insulation resistance : 5M ohms
 Contact resistance : 2 ohm
 Hipot : DC 300V / 1 sec
 3. Each pcs with PE polybag.

5	CONN	USB3.0 A FEMALE G/F BLUE	1	P2	A	INITIAL RELEASE	2014/08/28	
4	PVC	45P PVC BLACK OVERMOLD	25g		REVISION#			
3	PE	LLDPE 500026 6201	16g		Cnc Tech, LLC P/N: 103-1010-BL-00500 TITLE: CABLE USB3.0 AM TO A/F			
2	CONN	USB3.0 A/M G/F BLUE	1	P1				
1	CABLE	《28AWG (7/0.127T) *P+D(7/0.127T)+AL+M》*2+28AWG (7/0.127T) *IP+24AWG(7/0.2T)*2C+A+D+B (16/6/0.12AM) OD6.0 BLACK	1	5000mm	DRAWN	WENC	DATE	08/24/14
NO.	PART NO.	DESCRIPTION	QTY	UNIT/REF	CHECKED	EDWIN	DATE	08/24/14
BILL OF MATERIAL					APPROVAL		SHEET	1 OF 1