

Datasheet revision 1.1

www.chipquik.com

COSOLV165-1L

Co-Solvent Low Evaporating Flux Remover 1L


Product Highlights Powerful Co-Solvent Flux Remover Low Evaporating Effective Cleaning of densely populated assemblies

Environmentally-Friendly Low Ozone Depletion, Low Toxicity RoHS 3 and REACH compliant

Specifications

Boiling Range: Flash Point: Liquid Density: Aspect: Water Content: Aromatic Compounds: NVR: Net Weight: Net Volume: Packaging: 150°C 82°C 1.011 g/cm³ (at 20°C) Colorless Liquid <0.1% <0.1% <0.01g/100ml 1.011kg 1L 1L Jug (1.011kg net weight)* *Packaged and Sold by Weight

Co-solvent De-fluxing Process:

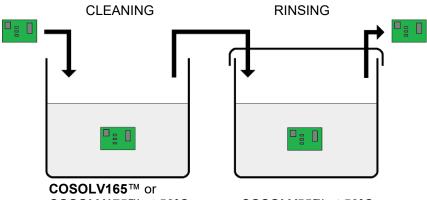

COSOLV175[™] at 50°C 5 minutes submerged 30 second drip dry above

COSOLV55[™] at 50°C 5 minutes submerged 30 second drip dry above

Storage and Handling

Store refrigerated or at room temperature 3-25°C (37-77°F).

Transportation

This product has no shipping restrictions. Shipping below 0°C (32°F) or above 25°C (77°F) for normal transit times by ground or air will not impact this product's stated shelf life.

Conforms to the following Industry Standards: RoHS 3 Directive (EU) 2015/863:

Yes