

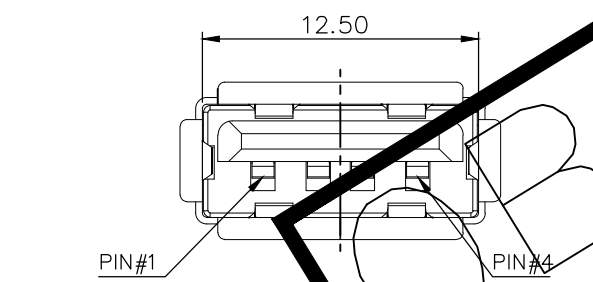


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG 2006
 © COPYRIGHT 2009 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	RELEASED(ECR-15-013804)	3MAR2016	A.X	H.W

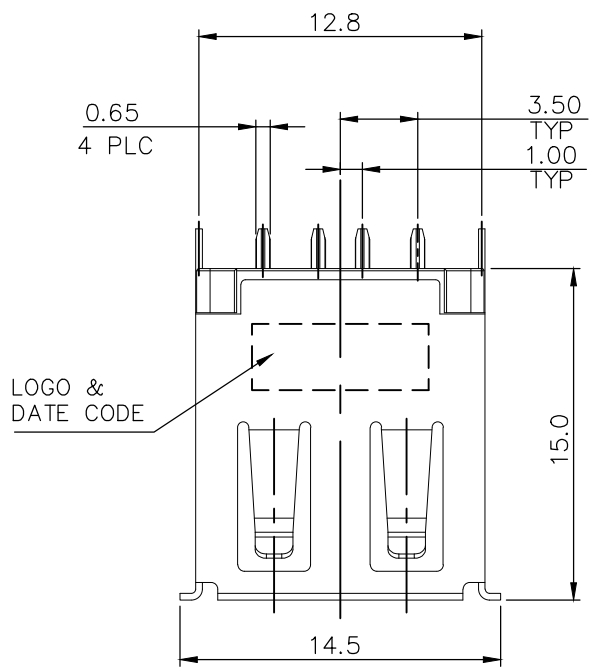

NOTE:
 1. MATERIAL:
 HOUSING: THERMOPLASTIC(PA9T) WITH 30%GF, UL 94V-0, BLACK COLOR.
 CAP: THERMOPLASTIC(PA9T) WITH 30%GF, UL 94V-0, WHITE COLOR.
 CONTACT: PHOSPHOR BRONZE.
 SHELL: BARSS.
 2. FINISH:
 CONTACT: GOLD FLASH PLATING ON CONTACT AREA, 3.048μm [120μ"] MIN. MATTE TIN PLATING ON SOLDER TAILS. 1.27μm [50μ"] MIN. NICKEL UNDERPLATING OVER ALL.
 SHELL: 0.762μm [30μ"] MIN. NICKEL PLATED OVER 0.762μm [30μ"] MIN. Cu UNDERPLATING OVER ALL.
 3. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

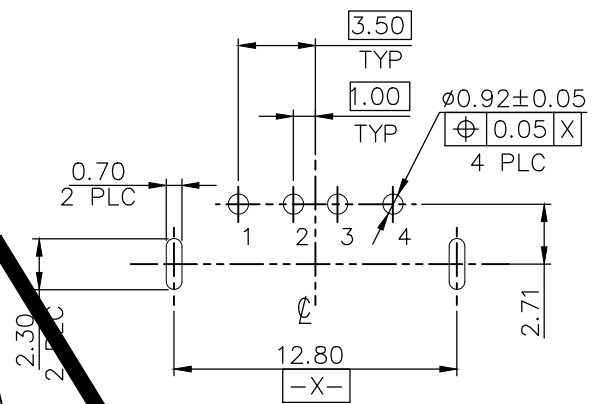

RECOMMEND P.C.B LAYOUT (THICKNESS 1.6mm)
 (COMPONENT SIDE) TOLERANCE±0.05mm

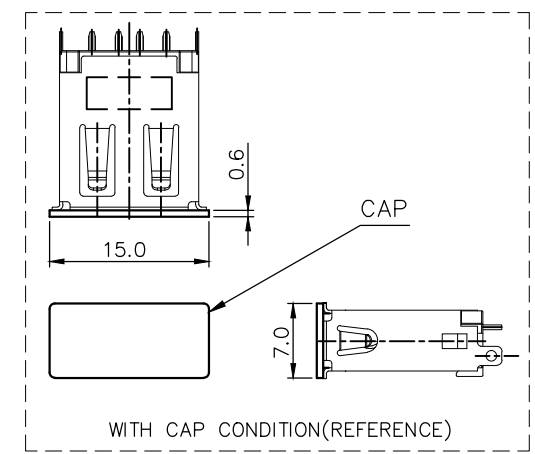

TAPE & REEL	2041230-1
PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. CHIEN 25FEB2010	Tyco Electronics Corporation Taipei, Taiwan												
DIMENSIONS: MM		CHK S. CHIEN 25FEB2010													
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD W. KODAMA 25FEB2010	NAME												
<table border="1"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± 0.30</td></tr> <tr><td>2 PLC</td><td>± 0.20</td></tr> <tr><td>3 PLC</td><td>± 0.15</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± 3°</td></tr> </table>		0 PLC	± -	1 PLC	± 0.30	2 PLC	± 0.20	3 PLC	± 0.15	4 PLC	± -	ANGLES	± 3°	PRODUCT SPEC 108-57797	USB CONNECTOR, A SERIES, VERTICAL, DIP TYPE
0 PLC	± -														
1 PLC	± 0.30														
2 PLC	± 0.20														
3 PLC	± 0.15														
4 PLC	± -														
ANGLES	± 3°														
MATERIAL SEE NOTE		APPLICATION SPEC	SIZE A3												
FINISH SEE NOTE		WEIGHT 2.02 GRAMS	CAGE CODE 00779												
		CUSTOMER DRAWING	DRAWING NO C=2041230												
		SCALE	RESTRICTED TO												
		SHEET 1 OF 1	REV B												