



I. PART NUMBER

08054W106MAT2A

II. MECHANICAL DIMENSION



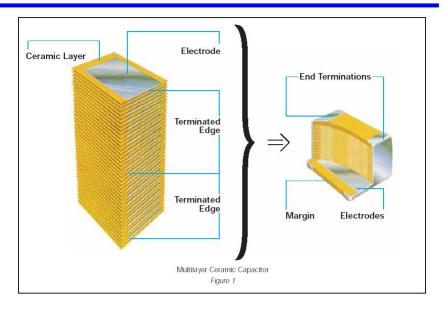

Dimension	Length (L)	Width (W)	Max Thickness (T)
mm	2.01 ± 0.20	1.24 ± 0.20	1.45
Inches	0.079 ± 0.008	0.049 ± 0.008	0.057

III. PERFORMANCE CHARACTERISTICS

Capacitance Value 10.00 µF

Capacitance Tolerance $M = \pm 20\%$

Dissipation Factor 12.5% max

Operating Temp. Range -55° C to $+105^{\circ}$ C

Temperature Characteristic $\pm 22\%$ (X6S)

Voltage Rating 4.0 VDC

Insulation Resistance $50 \text{ M}\Omega$

(charge device with rated voltage for 120 ±5 sec @ room temp/humidity)

Test Frequency 1.0 kHz @ 1.0 Vrms

Terminations Nickel Barrier; 100% matte Tin Finish, RoHS compliant

DRAWN	Shamsi Hadi	17-07-14	CUSTOMER	
CHECKED	Shamsi Hadi	17-07-14	CUSTOMER PART NO.	
REFERENCE NO.	SMP-CHIP		AVX CATALOG NO.	08054W106MAT2A