




TOP VIEW




FRONT VIEW

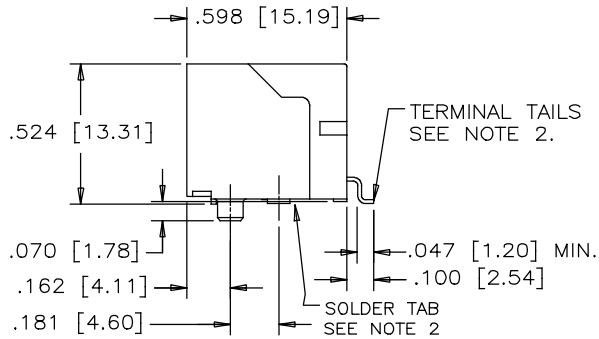

SIDE VIEW

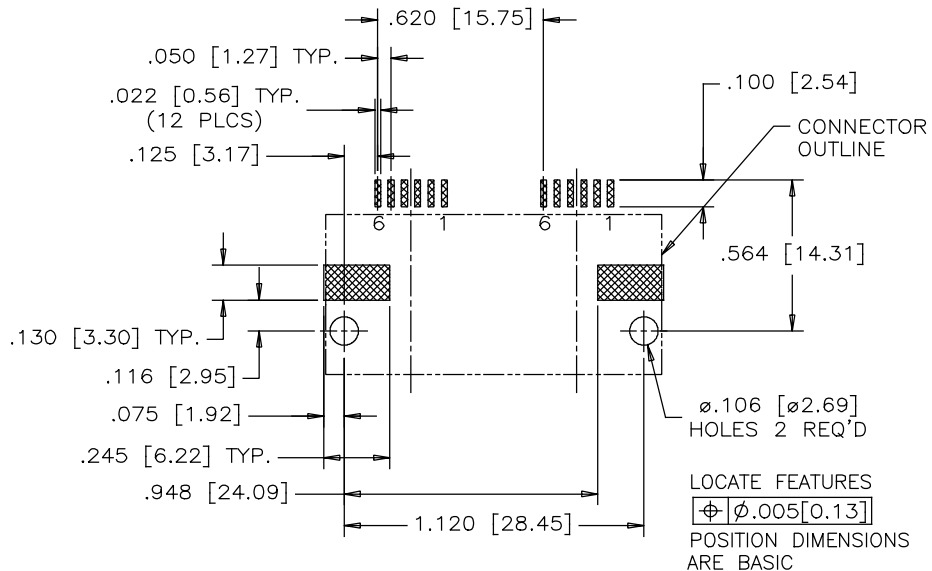

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)
TOLERANCE: ± 0.05 [0.02]

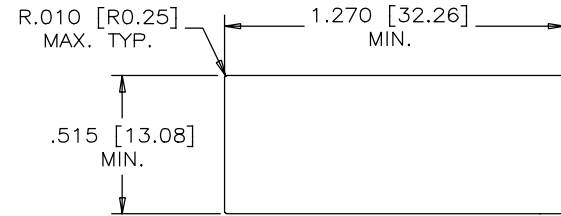

RECOMMENDED PANEL CUTOUT

NOTES

1. MATERIAL:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0
COLOR:BLACK

CONTACTS: PHOSPHOR BRONZE
PLATING: 20 μ " [0.508 MICRONS]
MIN. GOLD ON MATING SURFACES.
50 μ " [1.27 MICRONS]
MIN. NICKEL UNDERPLATE
100 μ " [2.54 MICRONS]
MIN. MATTE TIN OR GOLD FLASH
ON CONTACT TAILS.

SOLDER TAB: COPPER ALLOY WITH TIN PLATING.

2. COPLANARITY SPECIFICATION:

WITH THE MODULAR JACK SITTING ON A
LEVEL SURFACE, THE MAXIMUM GAP BETWEEN
THE LEVEL SURFACE AND ALL TERMINAL TAILS
AND BOTH FITTING NAILS IS .004 [0.10].

AMPHENOL PART NUMBER: RJ SSE-7060-02

REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	OCT 30/17	L.CHAN
B	REMOVE THE LED HOLE	NOV 13/17	L.CHAN

UNLESS SPECIFIED OTHERWISE	DRAWN RONNIE.C	DATE OCT 30/17	Amphenol Canada Corp. www.amphenolcanada.com
PRIMARY UNITS INCH	CHECKED AMY.Z	DATE OCT 30/17	
SECONDARY MILLIMETER	M.E. APP'D		TITLE
REFERENCE IN PARENTHESES	Q.A. APP'D		2 PORTS SURFACE MOUNT JACK, UNSHIELDED WITH HOLD DOWN BRACKET, 6 POSITION & 6 CONTACTS-RoHS COMPLIANT
GENERAL TOLERANCES	DWG APPR.		DWG. NO.
1 DECIMAL PLACE ± 0.025	ENG. REL. NO.		P-RJSSE-7060-02
2 DECIMAL PLACES ± 0.020	REF.		REV B
3 DECIMAL PLACES ± 0.015	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554 DWG SIZE: C SCALE: N/A SHEET 1 OF 1
ANGULAR DEGREES $\pm 1.0^\circ$			