

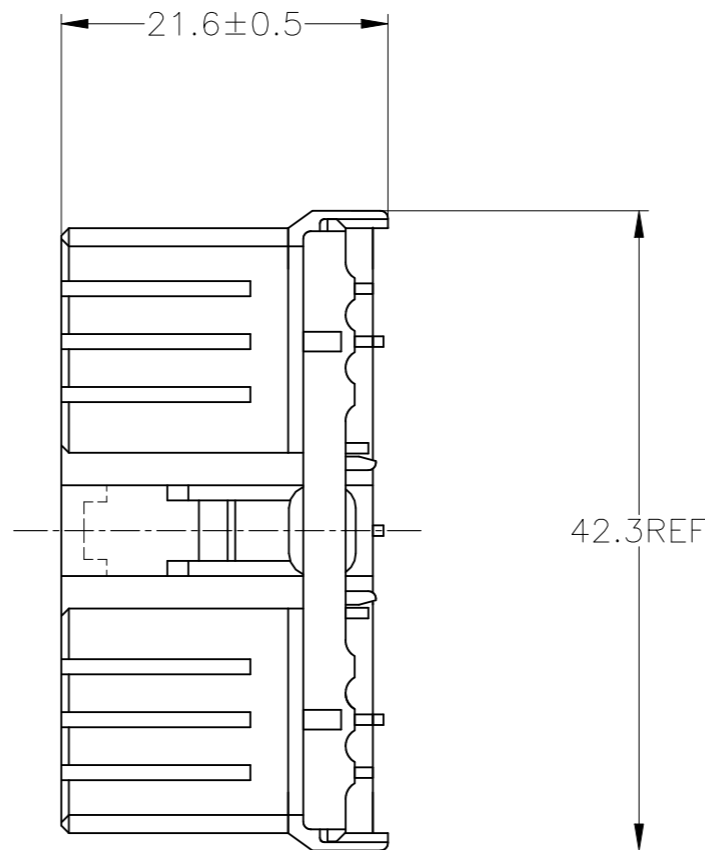


| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|-----|---------------------------|-----------|-----|------|
| | F3 | REVISED PER ECR-22-153250 | 21OCT2022 | RK | MT |

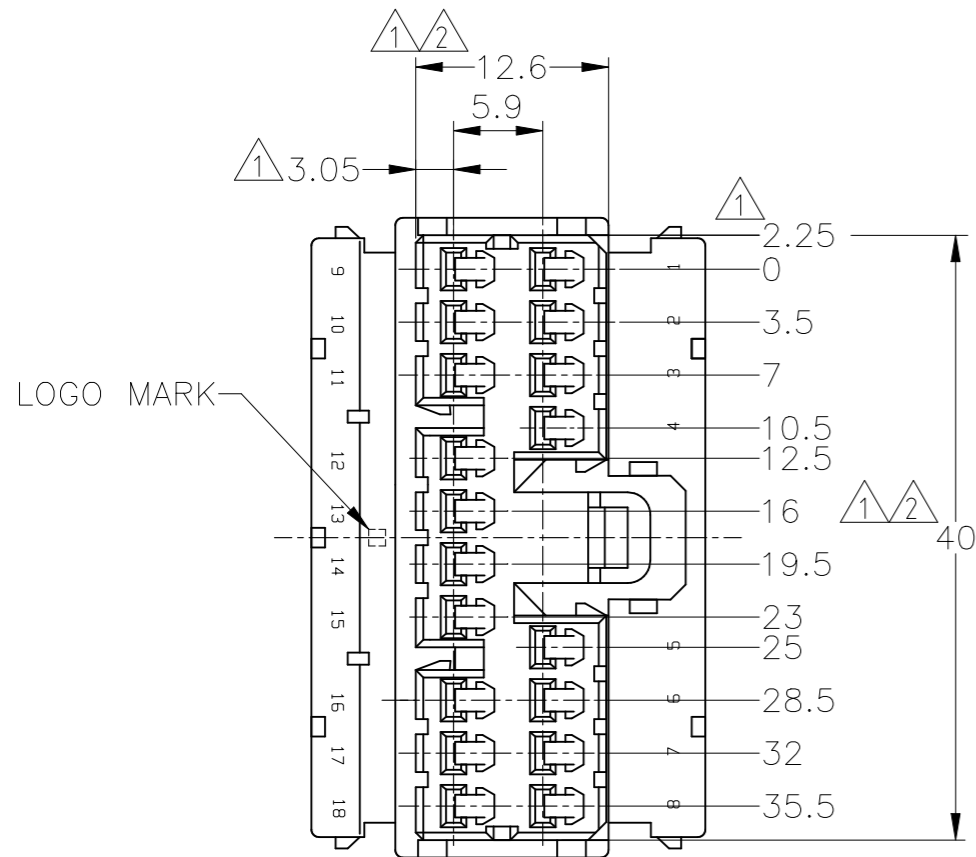

- ① -A- 面より2mmの範囲で測定
- ② 相手ハウジングと所定の機能を満足して嵌合できること
- 3. 内装するリセプタクルコンタクトは型番173630, 173631
- ① TO BE MEASURED BETWEEN -A- AND 2
- ② TO BE MATE WITH CAP HOUSING SMOOTHLY
- 3. APPLIED CONTACT; PART NUMBER 173630 AND 173631

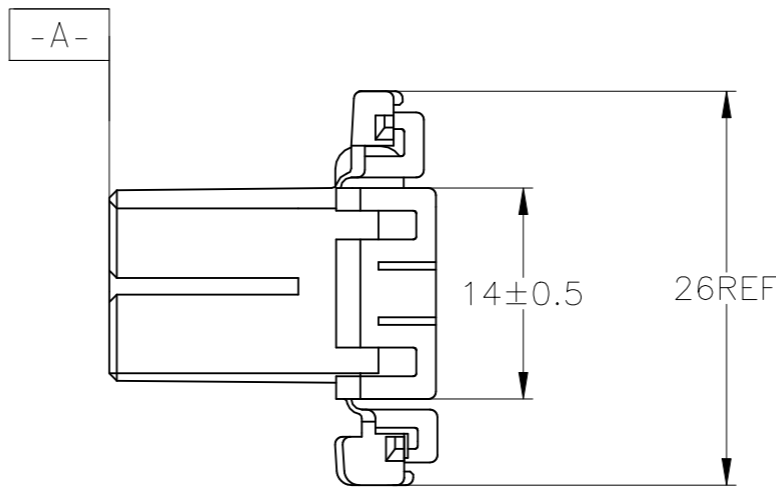


| OBSELETE | COLOR | NAME | PART NUMBER |
|----------|----------------------|-------------------------|-------------|
| | YELLOW | 18POSITION PLUG HOUSING | 173853-7 |
| OBSELETE | NATURAL | 18POSITION PLUG HOUSING | 1-173853-1 |
| | SEE DRAWING 173853-9 | | 173853-9 |
| OBSELETE | ORANGE | 18POSITION PLUG HOUSING | 173853-8 |
| | GRAY | 18POSITION PLUG HOUSING | 173853-6 |
| OBSELETE | BLUE | 18POSITION PLUG HOUSING | 173853-5 |
| | GREEN | 18POSITION PLUG HOUSING | 173853-4 |
| OBSELETE | BLACK | 18POSITION PLUG HOUSING | 173853-2 |
| | NATURAL | 18POSITION PLUG HOUSING | 173853-1 |
| | COLOR | NAME | PART NUMBER |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 耗
mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差



- 0 PLC ± -
- 1 PLC ± -
- 2 PLC ± -
- 3 PLC ± -
- 4 PLC ± -
- ANGLES ± -

MATERIAL
材料
PBT

FINISH
仕上
-

DWN M.SUGAWARA 26MAY06
CHK T.SHINOHARA 26MAY06
APVD K.BETSUI 26MAY06
PRODUCT SPEC 製品規格
APPLICATION SPEC 取付適用規格
WEIGHT -



070 SERIES MULTI-LOCK I/O CONNECTOR
18POSITION PLUG HOUSING

TOLERANCES UNLESS OTHERWISE SPECIFIED:
一般公差

| | |
|------------------|--------------|
| 10 _± | : ±0.2 |
| 30 _± | > 10 : ±0.25 |
| 100 _± | > 30 : ±0.3 |
| ANGLE : ±3° | |

| SIZE | CAGE CODE | DRAWING NO 番号 | RESTRICTED TO |
|------|-----------|------------------|---------------|
| A3 | 00779 | C-173853 | - |

CUSTOMER DRAWING

SCALE 尺度 2:1 SHEET 1 OF 1 REV F3