REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01_0	RELEASED PER ECN 90-0404-1	5-25-90	DCamelio

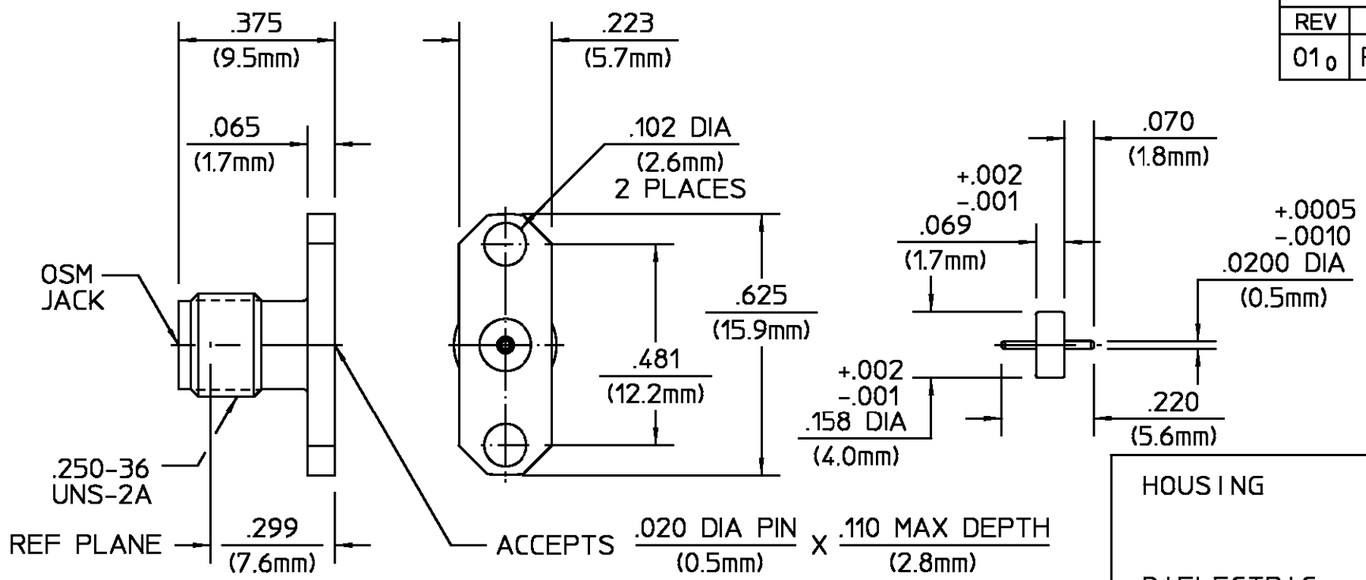

COMPONENT	MATERIAL	FINISH
HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER ASTM-A380
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457, MIL-P-19468, AND FED. SPEC L-P-403	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B196, ALLOY 173	GOLD PLATE PER MIL-G-45204 OVER COPPER PLATE PER MIL-C-14550
CONTACT EXT. BUSHING	IRON-NICKEL ALLOY PER MIL-I-23011 CLASS 1 (KOVAR)	GOLD PLATE PER MIL-G-45204 OVER NICKEL PLATE PER QQ-N-290
HERMETIC SEAL	GLASS BEAD	N/A

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) 50	Interface Dimensions MIL-STD-348, Fig. 319.2	Temperature Rating -65°C to 165°C
Frequency Range (GHz) DC to 18	Recommended Mating Torque N/A	Vibration MIL-STD-202, Method 204, Condition D, 20 G's
VSWR 1.06+.01 f(GHz)	Mating Characteristics:	Shock MIL-STD-202, Method 213, Condition I
Insertion Loss (dB MAX) .04 X $\sqrt{f(GHz)}$	Insertion (MAX Lbs) 3.0	Thermal Shock MIL-STD-202, Method 107, Condition B,
RF Leakage (dB MIN) -(70-fGHz)	Withdrawal (MIN Oz) 1.0	Moisture Resistance MIL-STD-202, Method 106
Corona, 70,000 Ft (VRMS MIN) 333	Force to Engage and Disengage (In/Lbs MAX) 2.0	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 1000	Center Contact Captivation Axial (Lbs) 6.0	Leak Test - MIL-STD-202, Method 112, Condition C, Procedure 1
Contact Resistance (Milliohms MAX) Center Contact 10.0	Radial (In/Oz) NONE	1×10^{-8} CC/SEC
Outer Contact 2.0		
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 667	Weight (Grams) TBD	
I.R.(Megohms MIN) 5000		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCE ON
FRAC. ± 1/64 DEC. ±.005 ANGLES ± 1°

DRAWN BY B.M.EDWARDS DATE 5/14/90
CHECKED BY M.CATIZONE 5/21/90
APP'D BY DCamelio 5-25-90

AMP

AMP Incorporated
140 Fourth Avenue
Waltham, MA 02451-7599

These drawings and specifications are the property of Omni Spectra Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.

USE ASS'Y PROCEDURE

NO. A.P. N/A

TITLE OSM 2 HOLE FLANGE MOUNT JACK RECEPTACLE - ACCEPTS .020 DIA PIN

SIZE	CODE IDENT NO.		REV
B	26805	2052-3324-02	01_0
SCALE 3:1			SHEET 1 OF 1

CUSTOMER DRAWING

AMP PART # 1052611-1
SHEET 1 OF 1 REV A