


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

| REVISION | | | |
|----------|-------------------|----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| B | RoHS Compliancy | 06-01-06 | DP |
| C | Updated Approvals | 09-03-08 | LY |
| | | | |

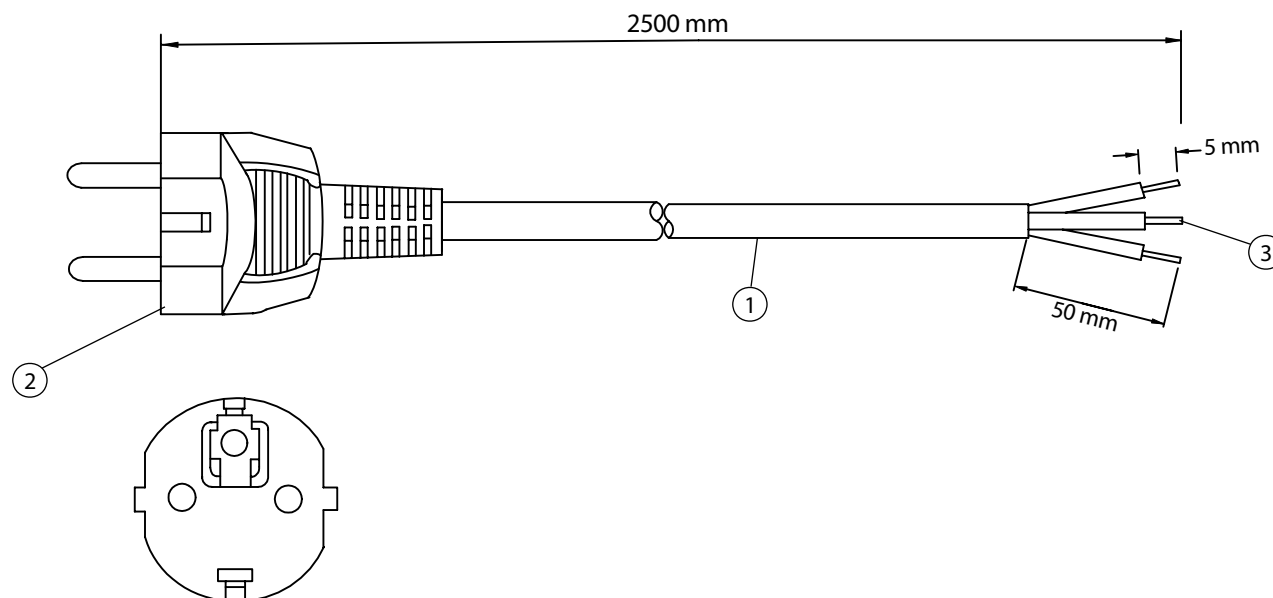

CONTROLLED

NOTES:

1. CORDAGE: H05VV-F, 3x0.75mm, UNSHIELDED, CEE COLOR CODE, TEMP. RATING 70°C, RATING: 250V 6A, JACKET COLOR: BLACK
2. PLUG: IEC 884/CEE7-VII
3. OTHER END: ROJ 50mm STRIP 5mm
4. APPROVALS: GERMANY, SWITZERLAND, DENMARK, NORWAY, FINLAND, BELGIUM, ITALY, NETHERLANDS, SWEDEN, AUSTRIA
5. ROHS COMPLIANT

| Dim range (mm) | | Tolerance +/- (mm) | | Qualtek Electronics Corp. PPC DIVISION | | |
|----------------|------|--------------------|--|--|----------------|-------------------|
| | | | | Part Number: | 363010-D01 | RoHS Compliant |
| | | | | Description: POWER CORD | | |
| 0-1 | 0.15 | | | UNIT: mm | | REV. C |
| 1-6 | 0.20 | | | | | |
| 6-18 | 0.30 | | | | | |
| 18-50 | 0.50 | | | | | |
| 50-120 | 0.70 | | | Drawn / Date | Checked / Date | Approved / Date |
| 120-250 | 0.90 | | | B. ZHANG 02-06-92 | 02-06-92 | JJH / 02-06-92 |
| 250-500 | 1.20 | | | | | |