
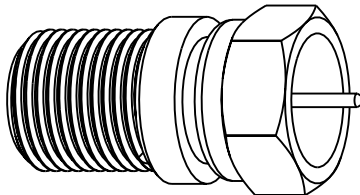


NOTES: 1. MATERIALS OF CONSTRUCTION: BODY = BRASS, NICKEL PLATED CONTACT = COPPER ALLOY, NICKEL PLATED INSULATOR = POLYPROPELENE 2. ELECTRICAL: IMPEDANCE: 75 OHMS FREQUENCY: DC-1 GHz RETURN LOSS: 19 dB MIN DC-500 MHz 13 dB MIN DC-1GHz 3. MECHANICAL: A. CENTER CONTACT TO ACCEPT Ø .022 TO Ø .042 PIN. B. TEMPERATURE RANGE: 40° C TO 85° C 4. PACKAGING: A. QUANTITY: SINGLE PACK B. MARKING: BAG TO BE MARKED "AMPHENOL, 531-40148, AND DATE CODE"	531-40148		REVISIONS				
	DRAWING NO.		REV	DESCRIPTION	DATE	ECO	APPR
	THIRD ANGLE PROJ. 		A	RELEASE TO MFG.	1/24/03	44337	CPM
			B	SEE SHEET 1	3/27/03	44416	CPM

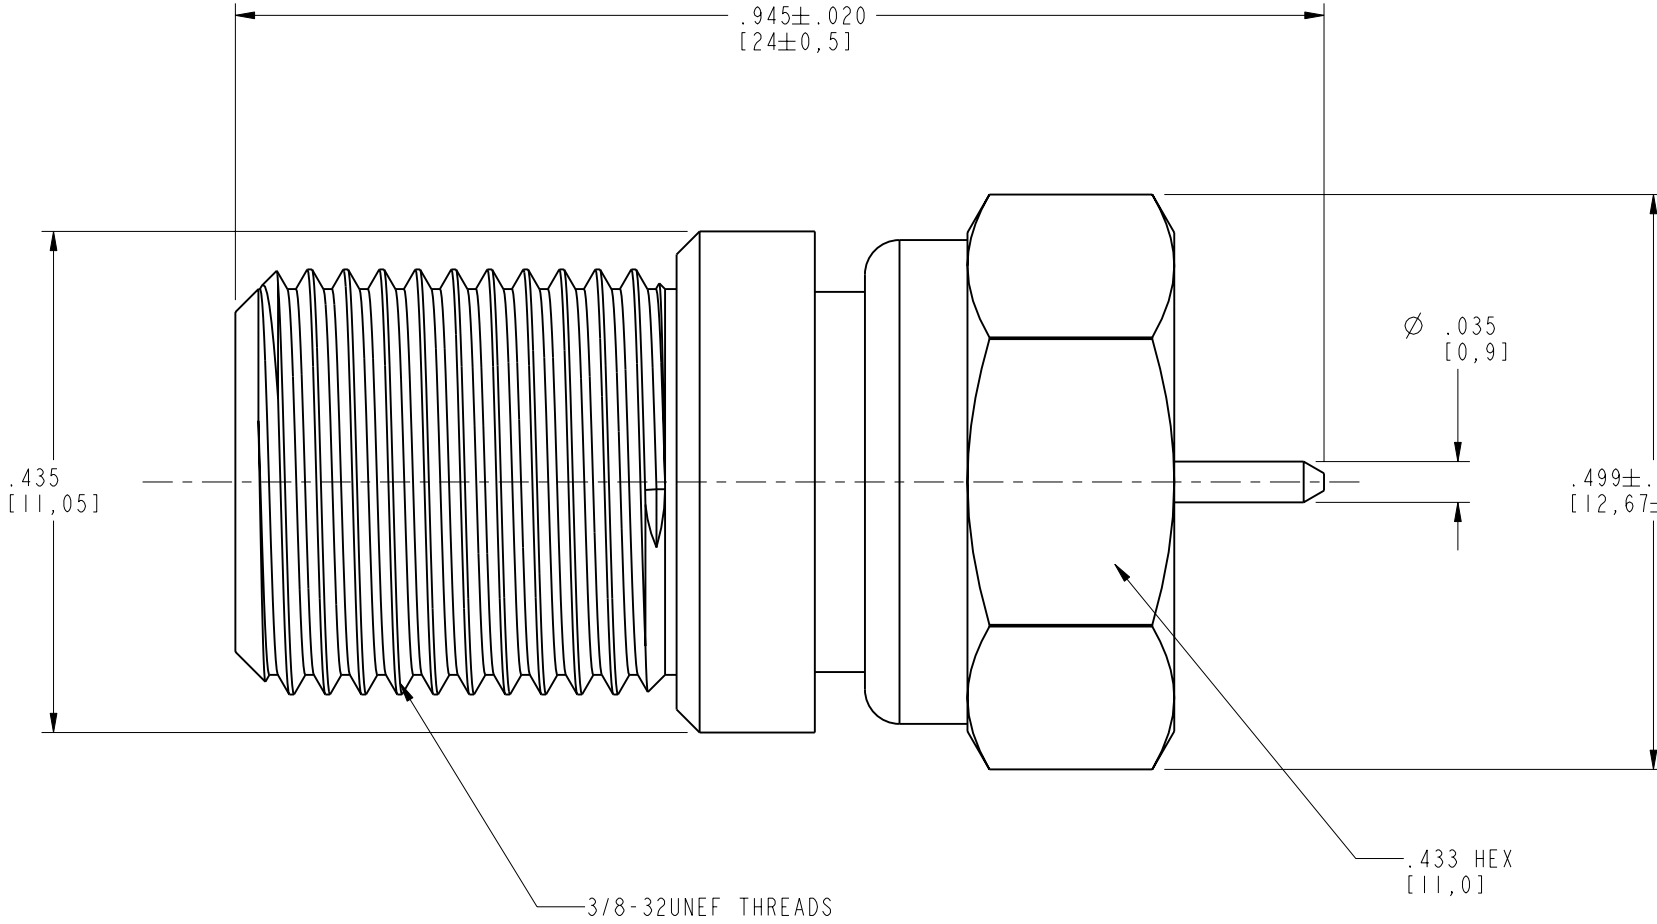

SCALE 2.000

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1°	MATERIAL	DRAWN C. McGRATH	DATE 27-Sep-02	TITLE F MALE TO F FEMALE			Amphenol Amphenol Corporation Communication and Network Products Division Danbury, CT U.S.A. 06810		
	REFERENCE EAR 771 GEN# 611X-1103-100_ASSY 611X-1103-100	ENGINEER O. BARTHELMES	DATE 27-Sep-02						
		APPROVED O. BARTHELMES	DATE 1/24/03						