
ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY				
REV	DESCRIPTION	DATE	APPROVED	
-	DCN 36626	03/09	STW	

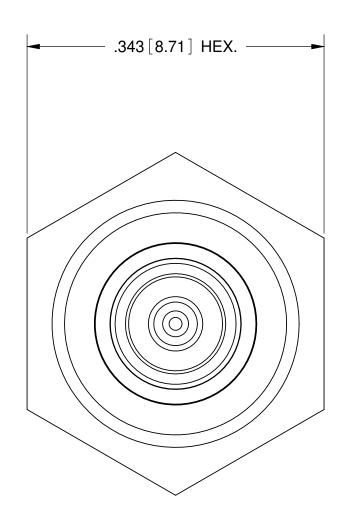

MATERIAL:

STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1 BODY:

CONTACT: BERYLLIUM COPPER PER ASTM B196,

ALLOY No. UNS C17300, TD04

PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B **INSULATOR:**

SILICONE RUBBER PER A-A-59588, CLASS 2B, GRADE 50/60 O-RING:

FINISH:

BODY: PASSIVATED PER AMS-2700.


CONTACT:

GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 18.0 GHz

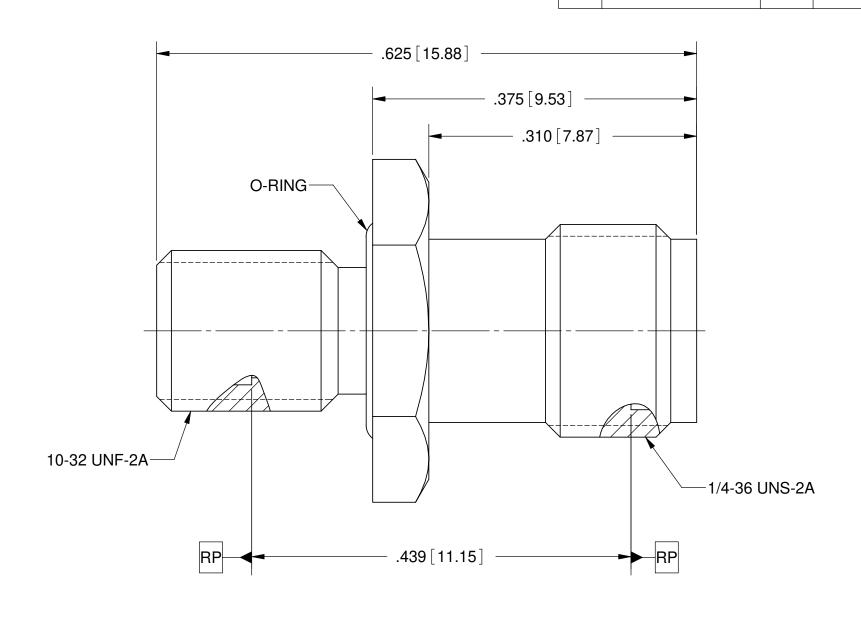

MATERIAL:	SEE	NOTES
FINISH:	SEE	NOTES
SURFACE AREA:	N/	4
PR	OPRIE	TARY
THE INFORMATION IS THE SOLE PROP ANY REPRODUCTION WITHOUT THE WRIT SV MICROWAVE, IN	ERTY C ON IN PA TTEN P	OF SV MICROWAVE ART OR AS A WHO ERMISSION OF

DIMENSIONS ARE IN INCHES TOLERANCES:
FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'
DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005
INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

THIRD ANGLE PROJECTION

1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
2) ALL DIMENSIONS ARE AFTER PLATING.
3) BREAK CORNERS & EDGES .005 R. MAX.
4) CHAM. 1ST & LAST THREADS.
5) SURFACE ROUGHNESS 63-MIL-STD-10.
6) DIA: S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R.
7) REMOVE ALL BURRS

UNLESS OTHERWISE SPECIFIED

DRAWN:	DAL 03/31/09
CHECKED:	STW 03/31/09
APPROVED:	STW 03/31/09

SV Microwave, Inc.

2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409

SMP FULL DETENT MALE TO SMA FEMALE PANEL MOUNT ADAPTER

9	SIZE B	95077	DWG.	NO.	SF1112-	6035
9	SCALE: 9:1					SHEET 1 OF 1