




REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	MAR08/18	L.CHAN

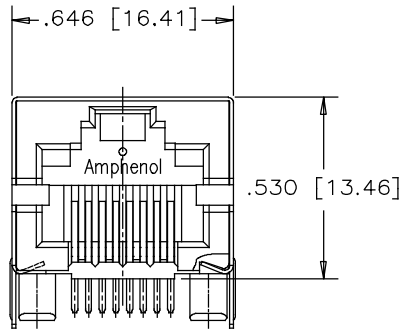

FRONT VIEW

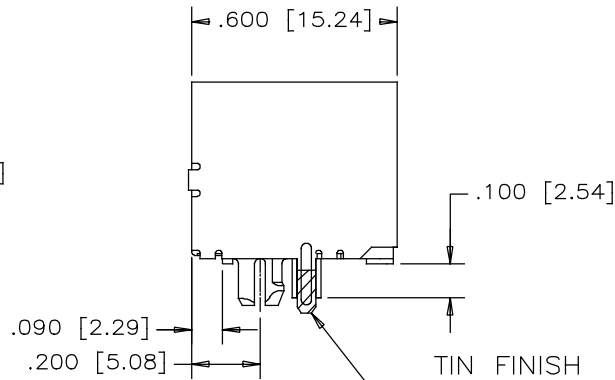

SIDE VIEW

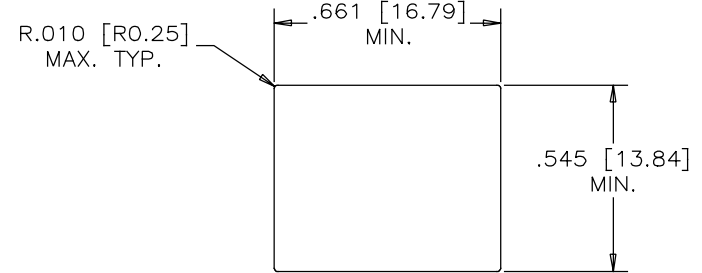

RECOMMENDED PANEL CUTOUT

MATERIALS:


PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0

CONTACTS:

PHOSPHOR BRONZE
PLATING: GOLD PLATING ON MATING SURFACE.
[SEE PART NUMBER FOR THICKNESS]
50 μ" [1.27 MICRONS]
MIN. NICKEL UNDERPLATE
100 μ" [2.54 MICRONS]
MIN. MATTE TIN ON CONTACT TAILS.

SHIELD:

STAINLESS STEEL WITH TIN FINISH ON SOLDER TAIL

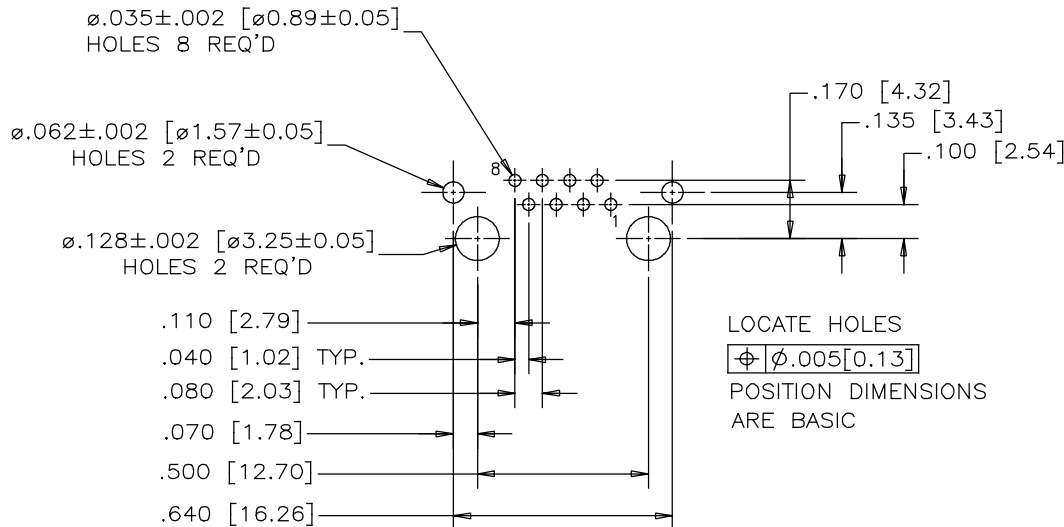

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

LOCATE HOLES

ϕ	ϕ .005 [0.13]
--------	--------------------

 POSITION DIMENSIONS
ARE BASIC

PART NUMBER: RJHSE-XE80

GOLD PLATING
 E=RJ45 FLAT CONTACT 6u"
 G=RJ45 FLAT CONTACT 15u"
 J=RJ45 FLAT CONTACT 30u"
 5=RJ45 FLAT CONTACT 50u"



UNLESS SPECIFIED OTHERWISE	DRAWN W. QIU	DATE MAR08/18
PRIMARY UNITS INCH	CHECKED L. CHAN	MAR08/18
SECONDARY MILLIMETER	M.E. APP'D	
REFERENCE IN PARENTHESES	Q.A. APP'D	
GENERAL TOLERANCES	DWG APPR.	
1 DECIMAL PLACE ±0.025	ENG. REL. NO.	
2 DECIMAL PLACES ±0.020	REF.	
3 DECIMAL PLACES ±0.015	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING
ANGULAR DEGREES ±1.0°		

Amphenol Canada Corp. www.amphenolcanada.com		
TITLE HIGH SPEED RJ45 SINGLE-PORT CONNECTOR, WITHOUT LED, SHIELD (OPEN FRONT, WITHOUT TABS) - RoHS COMPLIANT		
DWG. NO.	P-RJHSE-XE80	REV A
CODE ID NO. 03554	DWG SIZE: C	SCALE: N/A
SHEET 1 OF 1		